GM 68123

WORK REPORT OF THE 2012 DIAMOND DRILLING PROGRAM ON THE CASA BERARDI NORTH CLAIM GROUP

Documents complémentaires

Additional Files





Licence



License

Cette première page a été ajoutée
au document et ne fait pas partie du
rapport tel que soumis par les auteurs.

Énergie et Ressources naturelles
Québec

CASA BERARDI NORTH PROPERTY

WORK REPORT OF THE 2012 DIAMOND DRILLING PROGRAM ON THE CASA BERARDI NORTH CLAIM GROUP, CASA BERARDI AREA, QUEBEC

For


CAVA RESOURCES INC

formerly known as

SEA GREEN CAPITAL CORP.

(NTS 32E11)

Ressources naturelles et Faune
09 MAI 2014
Dir information géologique



Mitchell E. Lavery P.Geo., géo (Senior Author)
Bruce W. Mackie P.Geo.
Bruce Mackie Geological Consulting Services

REÇU AU MRNF
19 MARS 2014
DIRECTION DES TITRES MINIERS

September 2012

GM 68123

1391950

TABLE OF CONTENTS

1.0 Introduction....1
1.1 Property Description and Loaction....2
1.2 Climate, Local Resources, Infrastructure and Physiography....6
1.3 Personnel....8
2.0 Geology....8
2.1 Regional Geology....8
2.2 Property Geology....10
3.0 Exploration History....11
4.0 2011 Diamond Drilling Program....17
4.1 Introduction....17
4.2 Discussion of Results....20
5.0 Conclusions and Recommendations....23

Statement of Qualifications

APPENDICES

Appendix I Diamond Drill Logs/Reports
Appendix II Drill Hole Assay Sheets
Appendix III Laboratory Certificates
Appendix IV Statement of Costs

MAPS AND SECTIONS

Map 1 (1:500) Drill Section CAS-12-01, and 02 ....in pocket
Map 2 (1:500) Drill Section CAS-12-03 ....in pocket
Map 3 (1:500) Drill Section CAS-12-04 ....in pocket
Map 4 (1:500) Drill Section CAS-12-05 ....in pocket

LIST OF TABLES

Table 1: List of Mining Claims Casa Berardi North Property..... 5
Table 2: Drill Hole Collar Locations.....18

LIST OF FIGURES

Figure 1- Property Location Map..... 3
Figure 2- Casa Berardi North Disposition Map.....4
Figure 3: Casa Berardi North Claim Group Access..... 7
Figure 4: Geology Map of the Harricana Turgeon Greenstone Belt 9
Figure 5: Geology of the Casa Berardi-Joutel Area 10
Figure 6: Geology of the Casa Berardi North Claim Group.....11
Figure 7: Historic Drill Hole Location and I.P. Resistivity Surveys.....13
Figure 8: 2011 VTEM Survey Flight Lines.....15
Figure 9: Calculated Vertical Derivative and Interpreted Conductor Axes.....16
Figure 10: Diamond Drill Hole Locations.....19
Figure 11: Diamond Drill Hole Locations and Assay Highlights Conductor 1410 Zone.....22
Figure 7: Diamond Drill Hole Highlights and Exploration Targets Showing Airborne Conductive Zones....24

1.0 INTRODUCTION

During the first quarter of 2012 a diamond drill program was carried out on the Cava Resources Inc. ("Cava") (formerly known as Sea Green Capital Corp.) Casa Berardi North Claim Group that is located in the Casa Berardi area of north-westernl Quebec. The Casa Berardi North Claim Group is one of two properties that Cava holds in Joint Venture with Explorers Alliance Corporation ("Explorers").

Five holes (CAS-12-01 to CAS-12-05) totalling 706.9 metres were drilled in this program.

Strongly anomalous gold values were encountered in holes CAS-12-04 and 05 which were collared to test VTEM Anomaly L1410. Assay values returned included: 0.80 metres (from 96.1 to 96.9 metres) grading 5.81 gpt gold and 1.2 metres (from 104.4 to 105.6 metres) grading 3.82 gpt gold from hole CAS-12-04 and 1.4 metres (from 123.1 to 124.5 metres) grading 5.00 gpt gold and 1.5 metres (from 136.5 to 138.0 metres) which ran 6.11 gpt gold in hole CAS-12-05.

The gold values were associated with a zone of fuchsite-sericite alteration containing disseminated, blebby and local stringer sulphide (pyrite-pyrrhotite) mineralization.

Further work on the CASA Berardi North Claim Group is warranted. The work program should include additional drill testing on the L1410 VTEM Anomaly as well as to test the other untested VTEM Anomalies on the claim block. In addition further drilling is also warranted in and around historical hole CB-92-14 drilled by Glen Auden/Hemlo Gold which encountered strongly anomalous gold values including 1.01 gpt over 5.8 metres and 4.10 gpt gold over 0.4 metres

Portions of this report have been copied from the NI 43-101 Technical Report titled "Qualifying Report on the North and Cancor Extension Group Properties, Casa-Berardi, Collet, Dieppe, and Laberge Townships, Abitibi-West, Quebec prepared for Sea Green Capital Corp. " written by G.A. Harron and dated December 8th , 2003.

1.1 Property Description and Location

Cava's Casa North Claim Group is currently comprised of 75 staked claim units and 19 map designated claim cells ("CDC") in one contiguous block **(see Figure 2 and Table 1)**. The entire property comprises approximately 1600 hectares and is located in Casa Berardi and Estrees Townships, NTS 032E/11.

At the time of writing this report the claims are held in the names of Explorers Alliance Corporation, Bruce Mackie, Sea Green Capital, or Janice Bonhomme.



Figure 1 Property Location Map

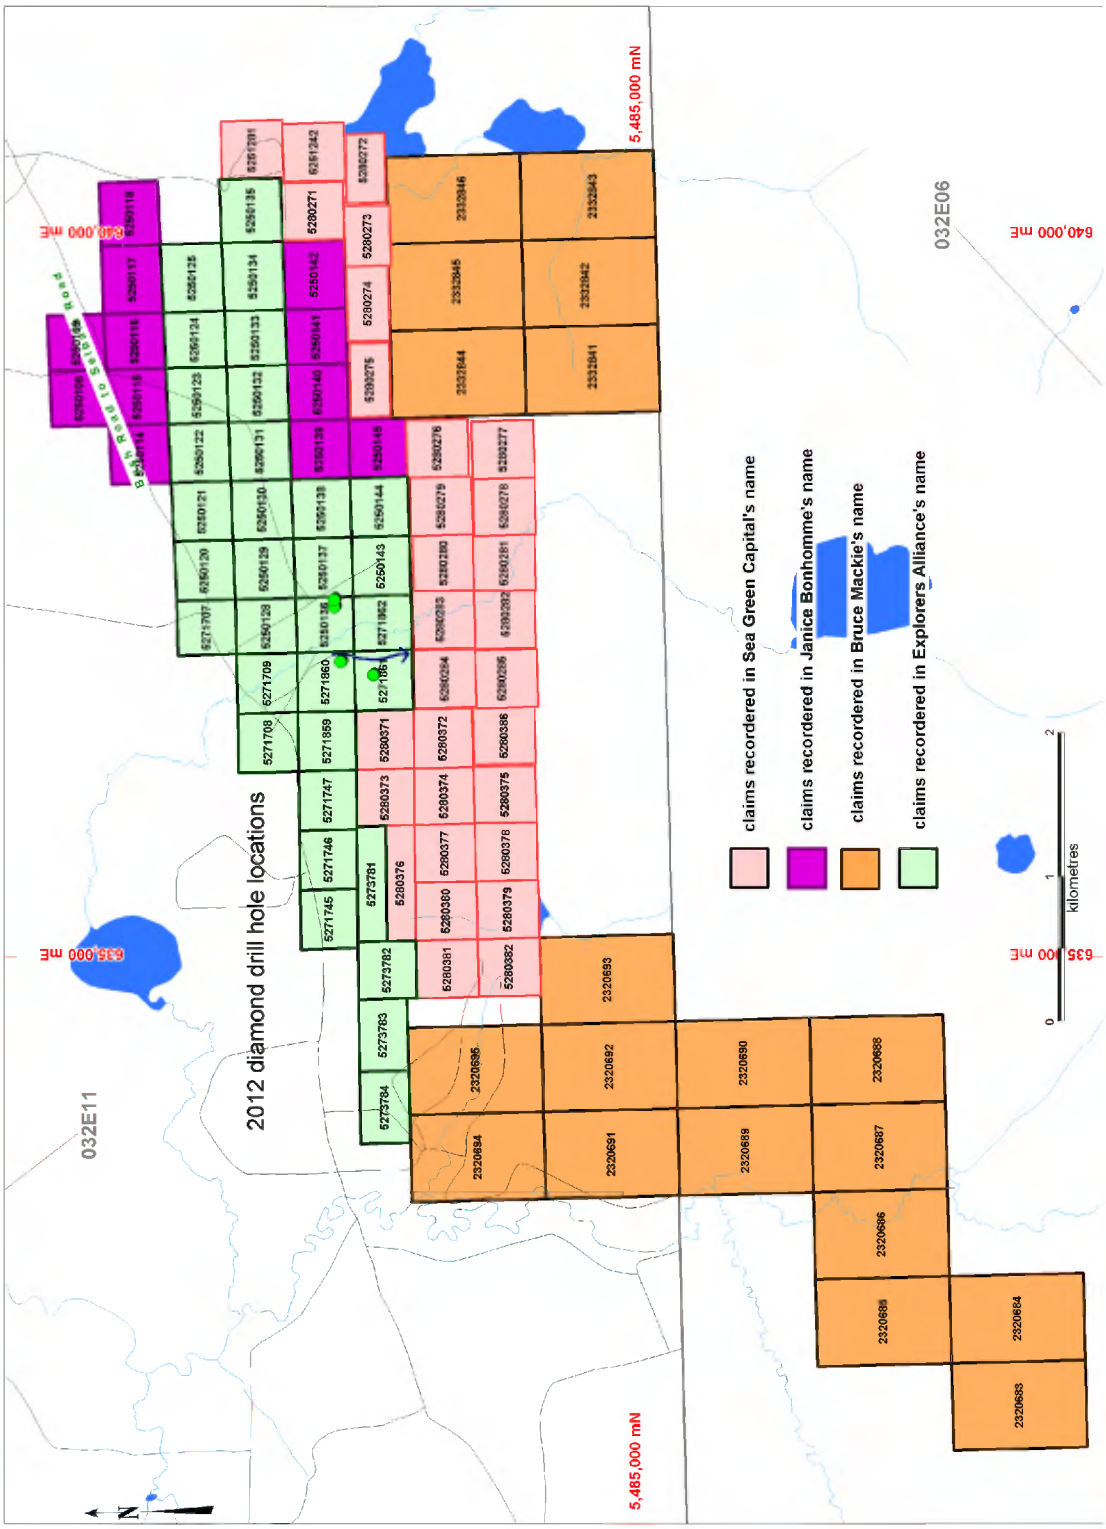


Figure 2 Casa Berardi North Disposition Map

Table 1 List of Mining Claims Casa Berardi North Property

CLAIM NUMBER	TOWNSHIP	RECORDED NAME	CLAIM NUMBER	TOWNSHIP	RECORDED NAME
GROUND STAKED CLAIMS			5280371	CASA-BERARDI	Sea Green Capital
5271862	CASA-BERARDI	Explorers Alliance Corporation	5280372	CASA-BERARDI	Sea Green Capital
5273781	CASA-BERARDI	Explorers Alliance Corporation	5280373	CASA-BERARDI	Sea Green Capital
5273783	CASA-BERARDI	Explorers Alliance Corporation	5280374	CASA-BERARDI	Sea Green Capital
5273784	CASA-BERARDI	Explorers Alliance Corporation	5280375	CASA-BERARDI	Sea Green Capital
5271707	CASA-BERARDI	Explorers Alliance Corporation	5280376	CASA-BERARDI	Sea Green Capital
5271708	CASA-BERARDI	Explorers Alliance Corporation	5280377	CASA-BERARDI	Sea Green Capital
5271709	CASA-BERARDI	Explorers Alliance Corporation	5280378	CASA-BERARDI	Sea Green Capital
5271745	CASA-BERARDI	Explorers Alliance Corporation	5280379	CASA-BERARDI	Sea Green Capital
5271746	CASA-BERARDI	Explorers Alliance Corporation	5280380	CASA-BERARDI	Sea Green Capital
5271747	CASA-BERARDI	Explorers Alliance Corporation	5280381	CASA-BERARDI	Sea Green Capital
5271859	CASA-BERARDI	Explorers Alliance Corporation	5280382	CASA-BERARDI	Sea Green Capital
5250120	CASA-BERARDI	Explorers Alliance Corporation	5280281	CASA-BERARDI	Sea Green Capital
5250121	CASA-BERARDI	Explorers Alliance Corporation	5280280	CASA-BERARDI	Sea Green Capital
5250123	CASA-BERARDI	Explorers Alliance Corporation	5280282	CASA-BERARDI	Sea Green Capital
5250124	CASA-BERARDI	Explorers Alliance Corporation	5280283	CASA-BERARDI	Sea Green Capital
5250125	ESTREES	Explorers Alliance Corporation	5280284	CASA-BERARDI	Sea Green Capital
5250128	CASA-BERARDI	Explorers Alliance Corporation	5280276	CASA-BERARDI	Sea Green Capital
5250129	CASA-BERARDI	Explorers Alliance Corporation	5280278	CASA-BERARDI	Sea Green Capital
5250130	CASA-BERARDI	Explorers Alliance Corporation	5280279	CASA-BERARDI	Sea Green Capital
5250131	CASA-BERARDI	Explorers Alliance Corporation	5280275	CASA-BERARDI	Sea Green Capital
5250132	CASA-BERARDI	Explorers Alliance Corporation	5280277	CASA-BERARDI	Sea Green Capital
5250133	CASA-BERARDI	Explorers Alliance Corporation	5280273	CASA-BERARDI	Sea Green Capital
5250134	ESTREES	Explorers Alliance Corporation	5251281	CASA-BERARDI	Sea Green Capital
5250135	ESTREES	Explorers Alliance Corporation	5280271	CASA-BERARDI	Sea Green Capital
5250136	CASA-BERARDI	Explorers Alliance Corporation	5280274	CASA-BERARDI	Sea Green Capital
5250137	CASA-BERARDI	Explorers Alliance Corporation	5280285	CASA-BERARDI	Sea Green Capital
5250138	CASA-BERARDI	Explorers Alliance Corporation	5251242	CASA-BERARDI	Sea Green Capital
5250143	CASA-BERARDI	Explorers Alliance Corporation	5280386	CASA-BERARDI	Sea Green Capital
5250144	CASA-BERARDI	Explorers Alliance Corporation	5280272	CASA-BERARDI	Sea Green Capital
5250122	CASA-BERARDI	Explorers Alliance Corporation	**MAP-DESIGNATED CLAIM CELLS**		
5271860	CASA-BERARDI	Explorers Alliance Corporation	2320684	CASA-BERARDI	Bruce Mackie
5271861	CASA-BERARDI	Explorers Alliance Corporation	2320687	CASA-BERARDI	Bruce Mackie
5273782	CASA-BERARDI	Explorers Alliance Corporation	2320688	CASA-BERARDI	Bruce Mackie
5250108	CASA-BERARDI	Janice Bonhomme	2320689	CASA-BERARDI	Bruce Mackie
5250109	CASA-BERARDI	Janice Bonhomme	2320690	CASA-BERARDI	Bruce Mackie
5250115	CASA-BERARDI	Janice Bonhomme	2320691	CASA-BERARDI	Bruce Mackie
5250116	CASA-BERARDI	Janice Bonhomme	2320692	CASA-BERARDI	Bruce Mackie
5250117	ESTREES	Janice Bonhomme	2320694	CASA-BERARDI	Bruce Mackie
5250118	ESTREES	Janice Bonhomme	2320695	CASA-BERARDI	Bruce Mackie
5250139	CASA-BERARDI	Janice Bonhomme	2320686	CASA-BERARDI	Bruce Mackie
5250140	CASA-BERARDI	Janice Bonhomme	2320683	CASA-BERARDI	Bruce Mackie
5250141	CASA-BERARDI	Janice Bonhomme	2320685	CASA-BERARDI	Bruce Mackie
5250142	ESTREES	Janice Bonhomme	2320693	CASA-BERARDI	Bruce Mackie
5250145	CASA-BERARDI	Janice Bonhomme	2332841	CASA-BERARDI	Bruce Mackie
5250114	CASA-BERARDI	Janice Bonhomme	2332843	CASA-BERARDI	Bruce Mackie
			2332844	CASA-BERARDI	Bruce Mackie
			2332845	CASA-BERARDI	Bruce Mackie
			2332846	CASA-BERARDI	Bruce Mackie
			2332842	CASA-BERARDI	Bruce Mackie

1.2 Climate, Local Resources, Infrastructure and Physiography

The Casa Berardi North Group is accessible by following the all season Selbaie Mine road north from La Sarre and Villebois, Québec **(see Figure 3)** and then taking a 6 kilometre bush road that turns off the Selbaie Mine road at 644865E and 5486760N.

Topographic relief on the claim group has an average elevation of 280 m above sea level. Drainage is poorly organized with meandering watercourses and abundant swamp lands, typical of the Canadian Shield. Bedrock outcroppings are not known to occur on the claim group, hence bedrock geology is known from drill cores, geophysical surveys and geological interpretation.

Most of the area has been harvested for wood, leaving only small black spruce, birch and poplar trees. Alders, shrubs and sedges are abundant.

The Municipality of La Sarre, and the City of Rouyn are the major population centres in the region offering a full range of goods, services and experienced personnel required for exploration, mining and ancillary services. Paved highways provide direct access from these communities to the southern parts of Québec and Ontario. Trucking and the CNR Railway are is the dominant and best developed bulk transportation systems in the area.

Local resources on the property consist of an abundance of fresh water and construction aggregate. An electric power line services the Casa-Berardi Mine and passes slightly to the east of the Casa Berardi North Group Claims.

Climatic conditions are typical of the northern boreal forest, with moderately cold winter conditions from November until March including 0.6 to 2 m of snowfall. Summers conditions include a moderate amount of precipitation and warm temperatures in the upper 20s and low 30s.

Most preliminary exploration activities can be executed year round, except geological and geochemical surveys, which are best executed in the summer months while diamond drill is best

undertaken during the winter months when drills and other heavy equipment can move over the frozen ground.

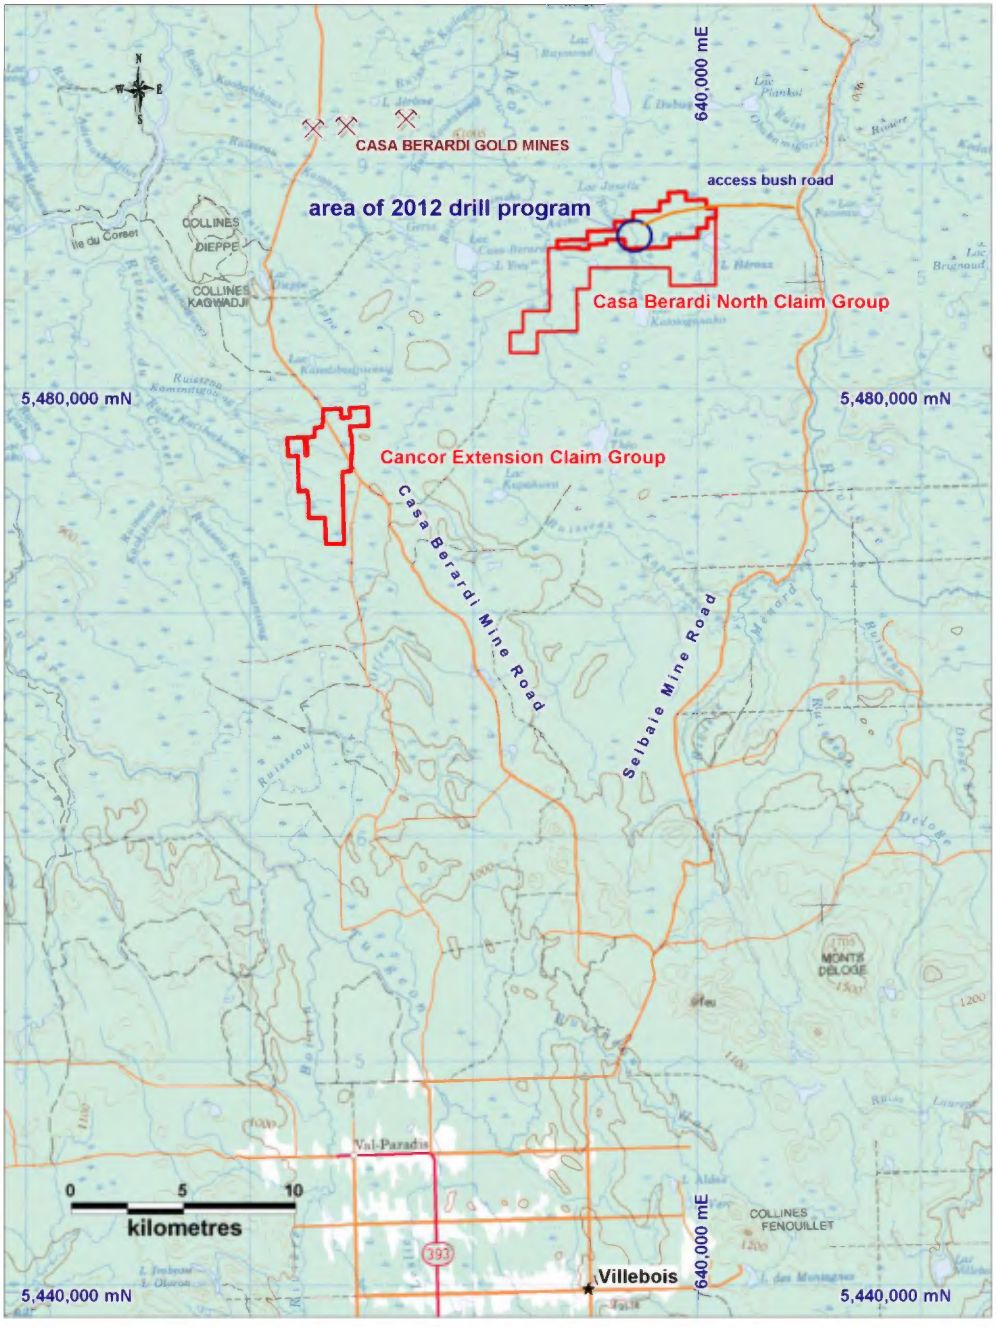


Figure 3: Casa Berardi North Claim Group Access

1.3 Personnel

Technical operations were supervised by Mitchell E. Lavery (P. Geo., géo), a consulting geologist working under contract to Cava. Mr. Terry Coyle a professional consulting geologist logged the drill core under the supervision of Mr. Lavery. Exploration technicians and labour was provided by Mitchell E. Lavery. The drilling was contracted to 9208-1934 Quebec Inc. of Val D'Or Quebec. The program was based out of Val d'Or Quebec where a fully equipped core shack was rented.

2.0 GEOLOGY

2.1 Regional Geology

The properties are located in the Harricana-Turgeon Greenstone Belt ("HTGB") in the northwest corner of the Abitibi Subprovince. This greenstone belt hosts the Matagami, Selbaie, Joutel and Casa-Berardi mining camps in Québec and the Detour Lake Mine in Ontario (**see Figure 5**). The HTGB trends east-west and is 60-90 km wide and extends over a distance of about 150 km. The northern and western boundaries correspond to the Opatica granite gneiss terrain, and the Boivin, Mistaouac, and Marest batholiths mark the southern boundary.

In the area of the Casa North Property the HTGB has been divided into four lithotectonic domains as shown in **Figure 4**. The Cartwright domain composed of basaltic to komatiitic volcanic rocks is interpreted as ocean floor volcanism capped by pelagic sedimentary rocks and oxide facies iron formations of the Tiabi Domain. These domains extend from east of Joutel into the northern part of Casa-Berardi Township, and continue westward into Ontario.

Located structurally beneath the Cartwright Domain are the andesite-dacite-rhyolite volcanic rocks of the Joutel - Raymond Domain. This assemblage is considered to be a central volcanic complex cored by the synvolcanic Mistaouac Batholith. This sequence of rocks hosts both the base metal massive sulphide deposits and the pyritic gold deposits in the Joutel area, and the base metal gold occurrences on the Cancor properties in Laberge Township.

West of the Joutel - Raymond Domain is the Dieppe Domain resting unconformably upon the Tiabi and Cartwright domains. Volcanic rocks of this domain are mainly tholeiites with abundant chert horizons intercalated with the pillowed basalt rocks.

Numerous deformation zones, from 100s to 1000s of m wide, traverse the HTGB, with strike dimensions in the order of 100s of kms. They are highly schistose zones characterized by a dominantly ductile deformation style. The contacts of lithotectonic domains are commonly marked by graphitic sediments and are the sites of the major deformation zones, such as the Casa-

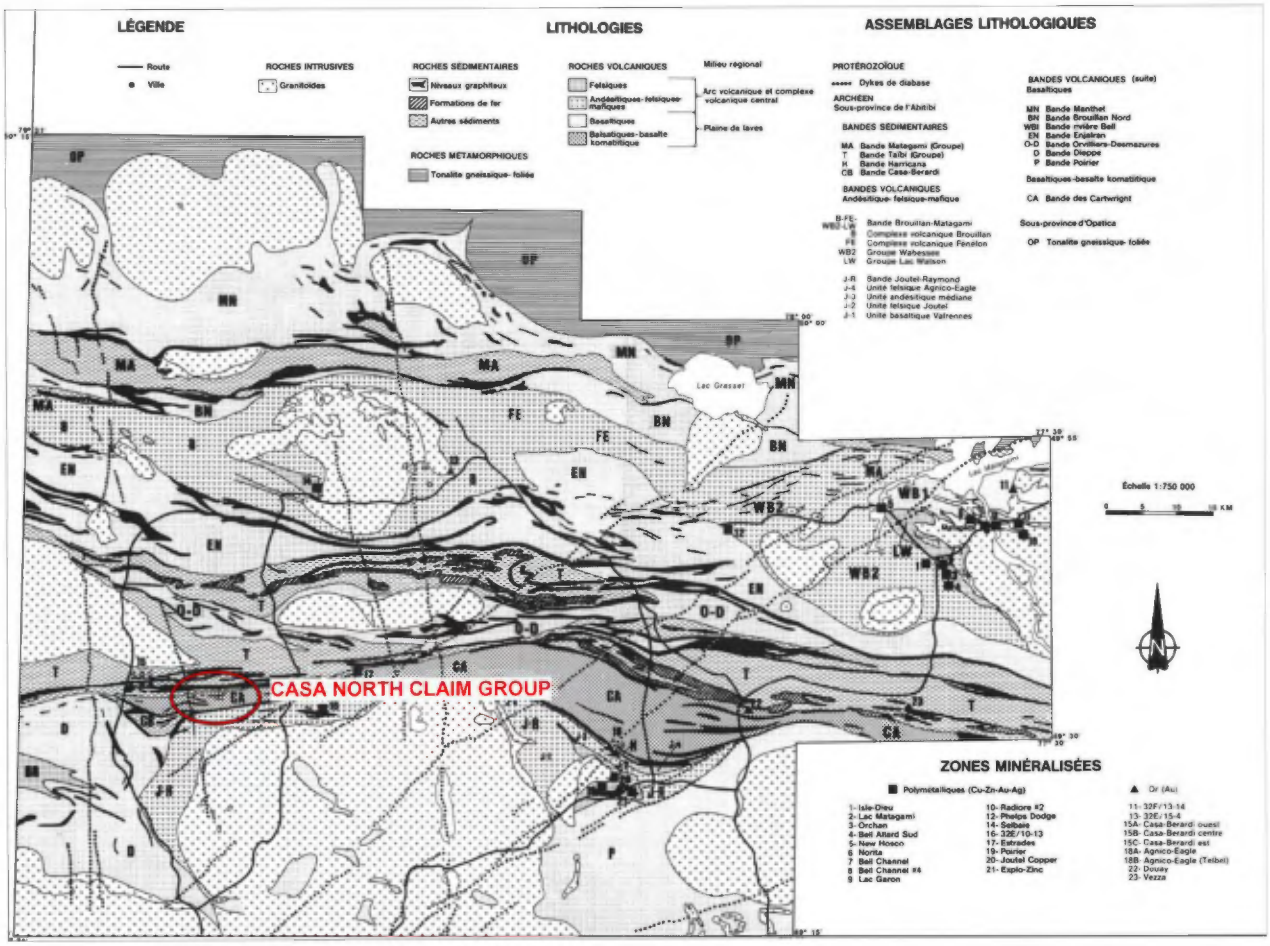


Figure 4: Geology Map of the Harricana Turgeon Greenstone Belt (after Lacroix et al 1989 PRO-89-04)

Berardi, Turgeon and Harricana zones. Later deformation zones, such as Laberge Deformation Zone ("LDZ") are oblique to the regional fabric and crosscut lithotectonic domains in a regional sense. These deformation zones may mark the boundaries of volcanic complexes such as the Joutel - Raymond domain.

2.2 Property Geology

The Casa Berardi North Group property geology **(Figure 6)** is interpreted from geophysical data and diamond drill information, as there are no outcropping on either group. The Casa Berardi North Group lies along the northwest margin of the presumed synvolcanic Mistouac Batholith. Bedrock is interpreted to be a mixed assemblage of basalt, felsic volcaniclastics and sedimentary rocks analogous to the "Golden Pond" sequence that hosts the Casa-Berardi ore deposits.

The stratigraphy strikes northeast-southwest and dips subvertically. Examination of the historic drill core logs located on and in the vicinity of the claim group suggest that many of the rock units exhibit moderate to strong sericite / carbonate +/- fuchsite alteration with disseminated pyrite and arsenopyrite, suggestive of proximity to quartz vein hosted gold mineralization and /or pyritic gold mineralization.

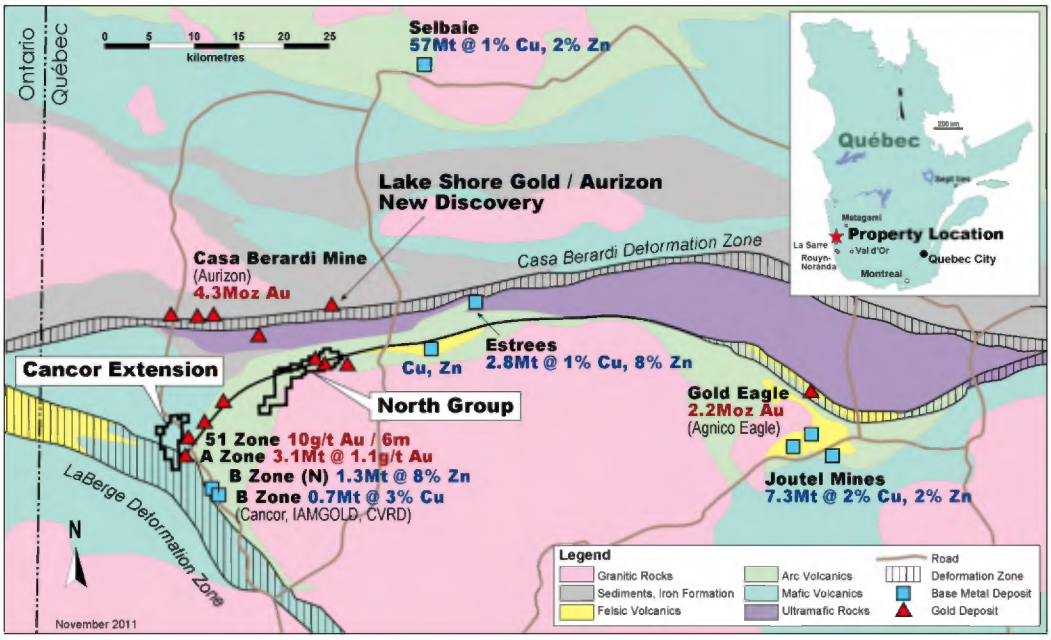


Figure 5: Geology of Casa Berardi –Joutel Area

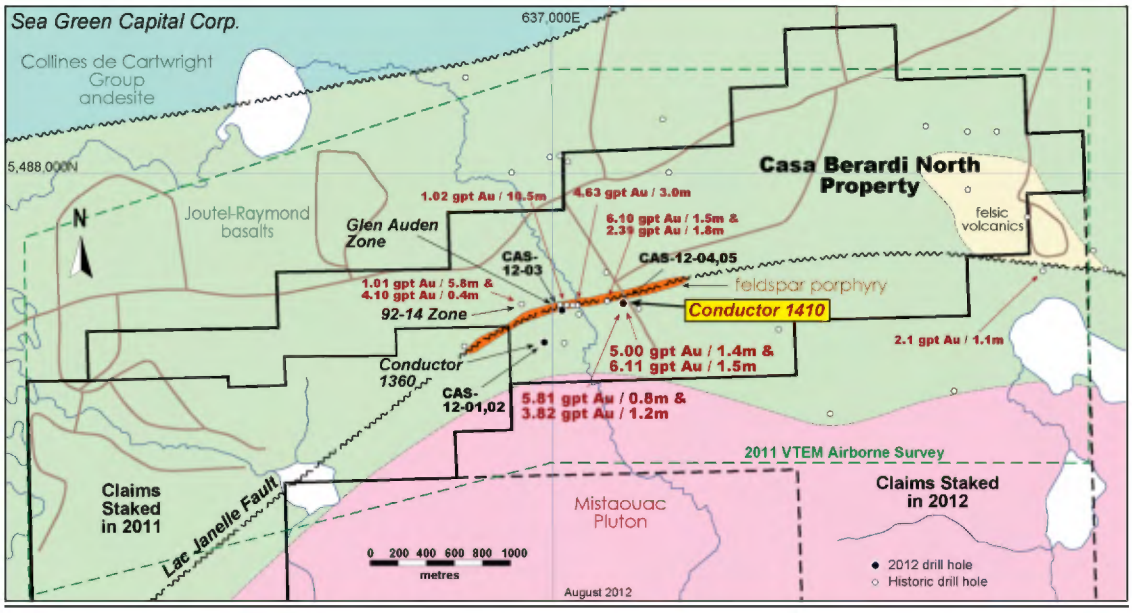


Figure 6: Geology of Casa Berardi North Claim Group

3.0 EXPLORATION HISTORY

Prior to 1973 the area in and around the current Casa Berardi North Claim Group was flown as part of a regional exploration program searching for base metal massive sulphide deposits by several companies including Noranda Exploration Company Ltd., Rio Tinto Canadian Exploration Ltd., Conwest Exploration Co. Ltd., Soquem, Phelps Dodge Corp., and INCO Ltd.. Ground follow up consisted mostly of detailing airborne conductors with HLEM and MAG surveys. Limited diamond drilling was carried out.

In 1974 the MRNQ sponsored an Input Mk. IV regional INPUT airborne electromagnetic survey, which revealed a number of short and relatively weak responses on the current Casa North Claim Group. The magnetic data from this survey was reprocessed and released in DV-90-13.

Ressources Minieres Eider Inc. ("Eider") in 1986 drilled five holes totalling 1206.3 metres (PE-86-2-4, 7, and 8) within the current Casa Berardi North boundary. Eider was primarily looking for base metal massive sulphides, but hole PE-86-6 encountered a 0.9 metres section which assayed 2.55 gpt gold.

Noranda Exploration Company Ltd. ("Noranda") in 1990 drilled two holes M-90-02 and 04 (341.3

metres) on the Casa Berardi North Property. Hole M-90-02 intersected three consecutive sample interval totalling 2.71 metres which all assayed greater than 1.0 gpt (no other assay details were given) in what is now known as the Glen Auden Gold Zone.

In 1994 Glen Auden Resources Limited ("Glen Auden") entered into an option agreement with Noranda. They carried out some infill I.P. Resistivity and drilled a total of 11 holes (CB-94-01 to 05, and CB-94-09 to 15 (1529.45 metres) in two drill campaigns on the current Casa Berardi North Property. The drilling was focused on following up on the anomalous gold intersection encountered by Noranda in hole M-90-02. Results were marginal in the immediate are or the historic hole but step out to the west (CB-94-14) and east (CB-94-12) returned strongly anomalous gold values including: 1.01 gpt gold over 5.8 metres and 4.10 gpt gold over 0.4 metres in holes CB-94-14 and 6.10 gpt gold over 1.5 and 2.39 got gold over 1.8 metres in hole CB-98-12. The results partially outlined a gold bearing horizon over a 600 metre strike length along a major regional fault structure called the "Lac Janelle Fault" which is located near the northern margin of the Mistaouac Pluton.

INCO Limited in 1995 explored the area for volcanogenic massive sulphide deposits. Two holes were drilled within the current property (77783-0 and 77782-0 for 402 metres). The holes encountered barren iron formation or graphitic sediments.

In 2004 and 2005 Virginia Gold Mines Inc. and Noranda flew a MEGATEM survey over a large portion of the Casa Berardi area. Follow-up work included drilling three holes (CBE-04-04-01, CBE-03-05-01 and CBE-07A-05-01) in and around the Casa Berardi North Property. No values were of economic interest were encountered.

In 2003 Sea Green entered into an Option Joint Venture Agreement with Explorers to earn an initial 55% in the Casa Berardi North Claim Group as well as the Cancor Extension Claim Group located ~10 kilometres to the southwest, with an option to earn increase its 70%.

In 2004 Sea Green drilled one hole SGS-04-04 (273 metres) to test a strong I.P. Resistivity

The anomaly that was located several kilometres to the west of the current Casa Berardi North Claim boundary.

During the winter of 2006-07 a grid (Grid 4) was established over the historic "Glen Auden Gold Zone" in what is now the central portion of the current claim group. I.P Resistivity and ground

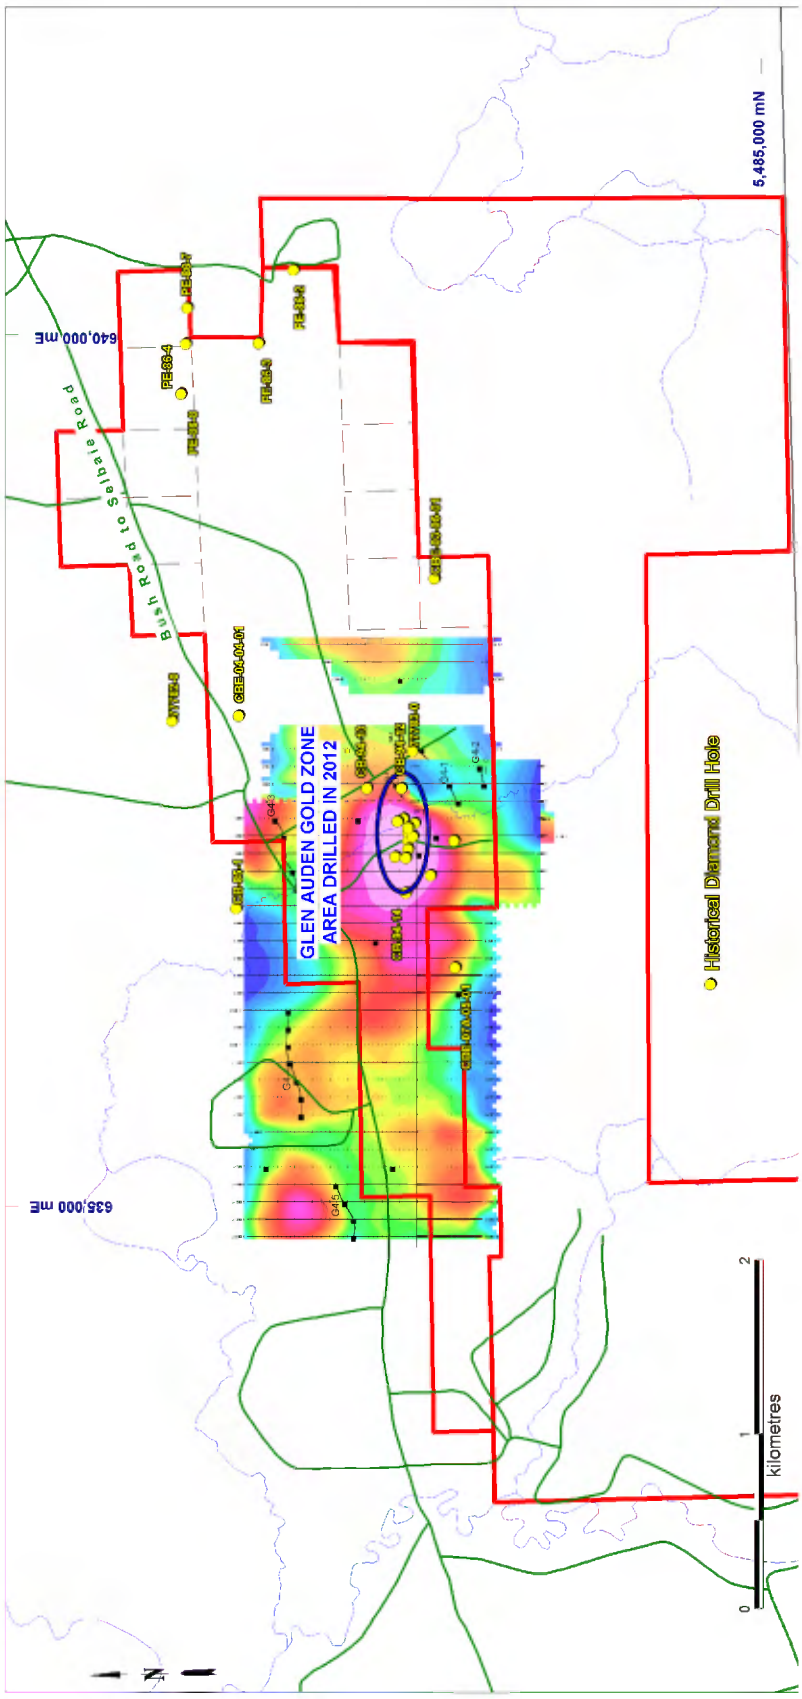


Figure 7: Historic Drill Hole Location and I.P. Resistivity Surveys

magnetometer surveys were carried out. Three diamond drill holes, SC4-07-01 to 03, totalling 741 metres were drilled. The program was highlighted by a 3.0 metre intersection (from 147.0-150.0 metres) in hole SC4-07-02 which returned 2.56 gpt gold with an altered sericitic-fuchsite schist.

Figure 7 shows the approximate location of all of the known historical drill holes locate on or near the Casa Berardi North Claim Group as well as the Resistivity results from the work carried out by Sea Green.

In the fourth quarter of 2011 Sea Green completed a Versatile Time Domain Electro Magnetic ("VTEM") survey over its Casa Berardi North Property. A total of 248.3 line kilometres were flown **(see Figure 8)**. The survey was contracted with Geotech Ltd. of Newmarket, Ontario and consisted of 250 line kilometres with a 100 metre flight line spacing.

The purpose of this program was to identify additional targets and to better delineate the known favourable gold bearing horizon located on the property.

The final survey data was forwarded to Scott Hogg & Associates Ltd. for further interpretation. Eighteen weak to moderate conductive zone were identified **(see Figure 9**). Reports covering the Airborne Survey and the interpretation by Scott Hogg & Associates are filed separately.

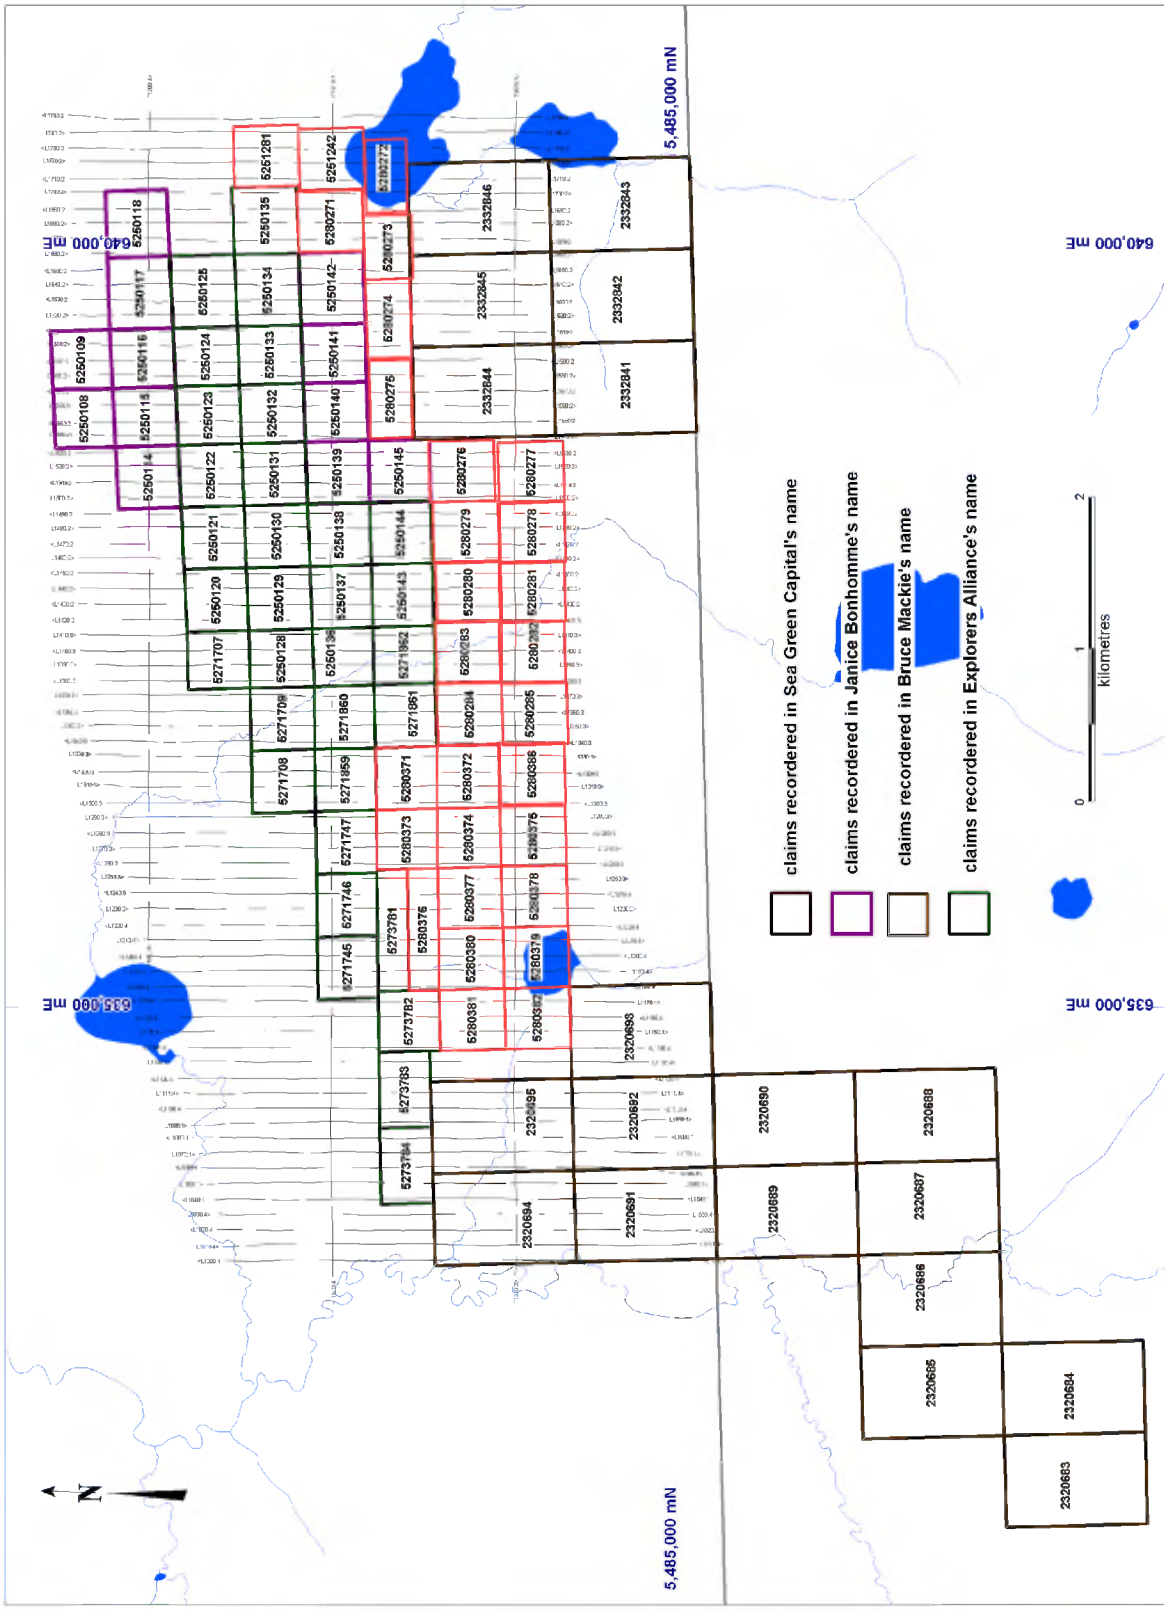


Figure 8: 2011 VTEM Survey Flight Lines

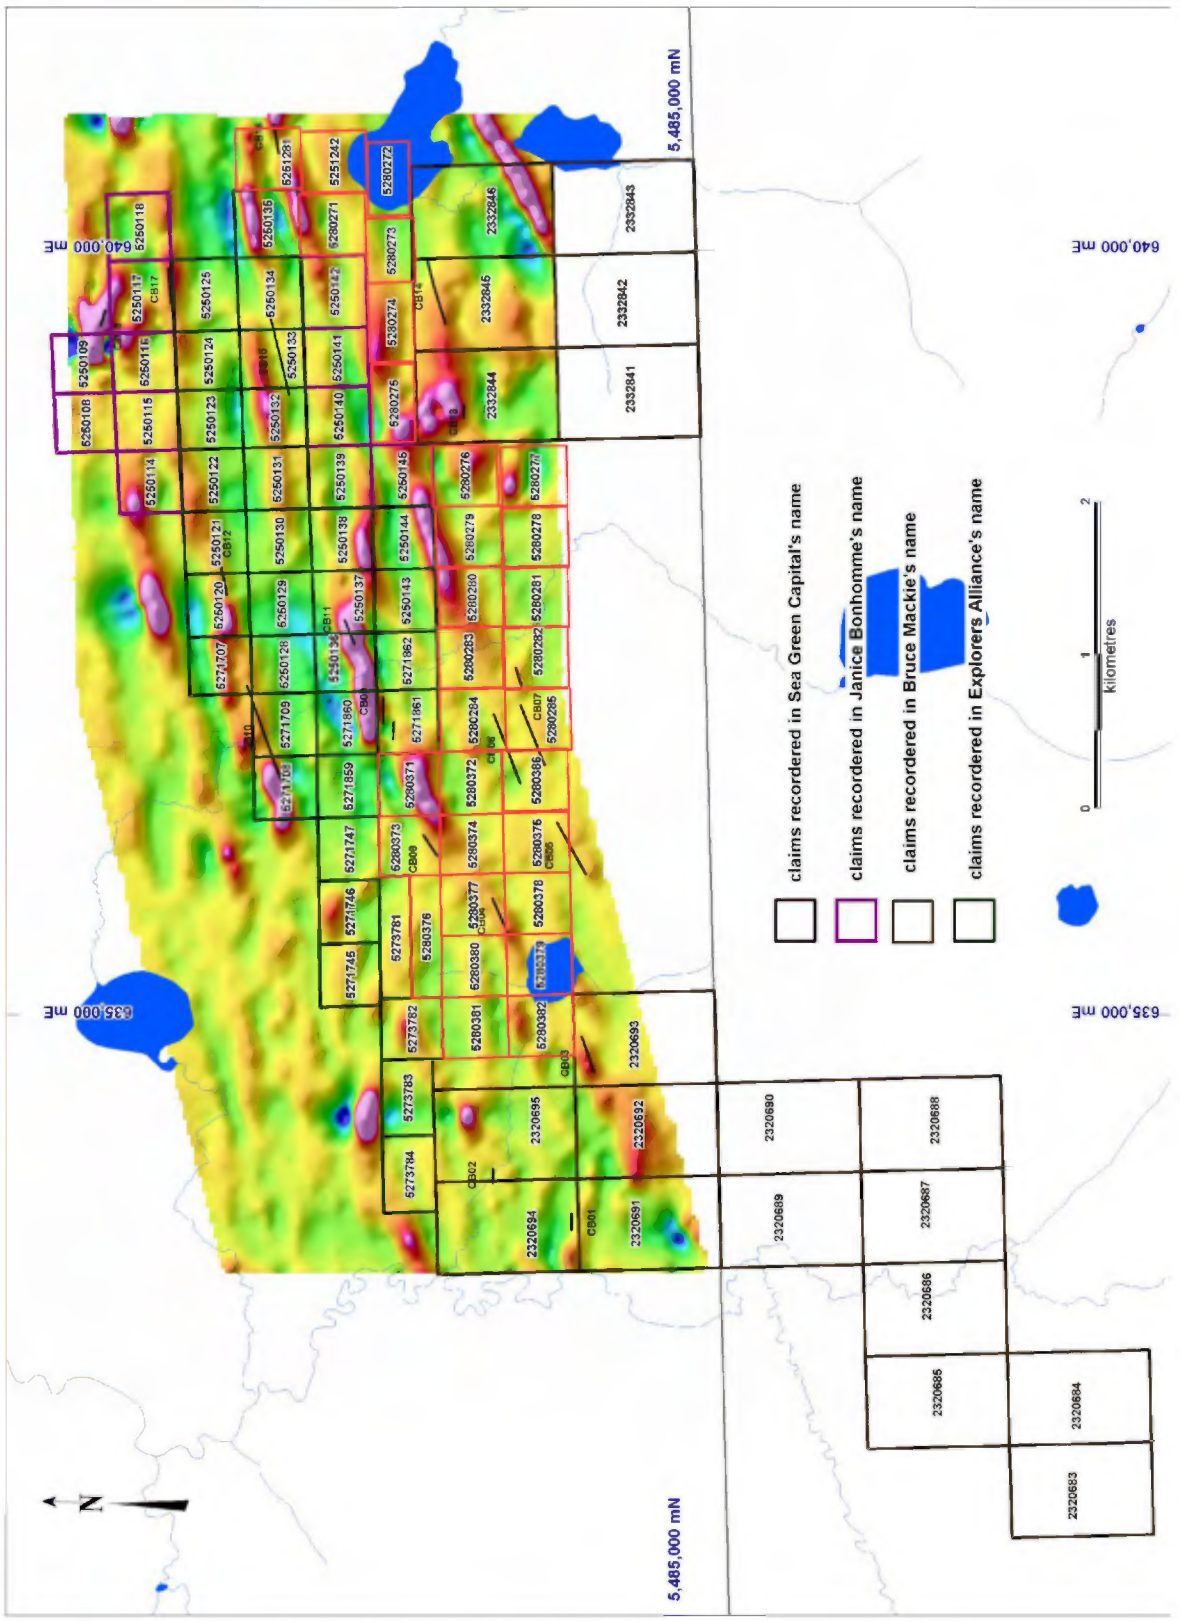


Figure 9: Calculated Vertical Derivative and Interpreted Conductor Axes

4.0 Diamond Drilling Program

4.1 Introduction

Between March 6th to March 17th, 2012 a diamond drill program was carried out on the Cava's Casa Berardi North Property. Five holes (CAS-12-01 to CAS-12-05 inclusive) totalling 706.9 metres were drilled.

Anomalous gold values were encountered in holes CAS-12-04 and 05 which were collar to test VTEM Anomaly 1410.

The drilling was contracted to 9208-1934 Quebec Inc. Of Val d'Or, Quebec. The drilling program was based out of a camp run located at the side of the Selbaie Road at 644876E, 5489252N (UTM Zone17, NAD 83). The drill program was accessed by a winter road and when weather conditions deteriorated by Nodwell swamp tractor and ski-doo.

Drill hole collars were spotted using a hand held GPS device. The holes were aligned using a Brunton Compass.

A total of 198 samples (excluding blanks and standards) representing a combined length of 156.1 metres were collected for gold, assay and multi-element ICP analyses. The core was brought to the logging facility in Val D'Or where the core was logged and sawed in half. Sample intervals were marked in the core boxes with a coloured 'China Marker'. A 'Write-in-Rain' numbered tag was placed at the beginning of each core sample. Sampling lengths ranged from 0.3 to 1.25 metres and averaged ~0.8 metres. Samples collected were individually bagged and labeled; individually bagged samples were then put into rice bags and sealed with a coloured tie wrap for shipping to AGAT Laboratories in Mississauga.

In addition to the standard quality control of the laboratory, a series of blanks and standards were inserted in every shipment for quality control purposes **(see Appendix II).**


Summaries of the diamond drill collar co-ordinates is given respectively in **Table 2.** Diamond drill logs can be found in **Appendix I**, while copies of the Assay Sample Sheets can be found in **Appendix II** and Assay Certificates are located in **Appendix III. Figure 10** shows the location of the diamond drill holes in relation to the claim boundaries.

Diamond drill hole data were entered into Gemcom and a set of sections as well as drill hole plans were produced a scale of 1:500 for the drill sections. These maps are included as **Maps 1, 2, 3, and 4** which accompany this report.

Table 2 Drill Hole Collar Locations

CASA BERARDI NORTH PROPERTY 2012 DRILL HOLE SUMMARY							
HOLE ID	EASTING	NORTHING	ELEV	DEPTH	AZIMUTH	DIP	CLAIM
CAS-12-01	636956	5486785	280	118	335	-50	5271861
CAS-12-02	636956.4	5486785.5	280	150	335	-60	5271861
CAS-12-03	637050	5487013	280	100.9	340	-65	5271860
CAS-12-04	637428	5487055	280	159	340	-65	5250136
CAS-12-05	637480	5487055	280	179	340	-65	5250136
				706.9			

Figure 10. Diamond Drill Hole Locations

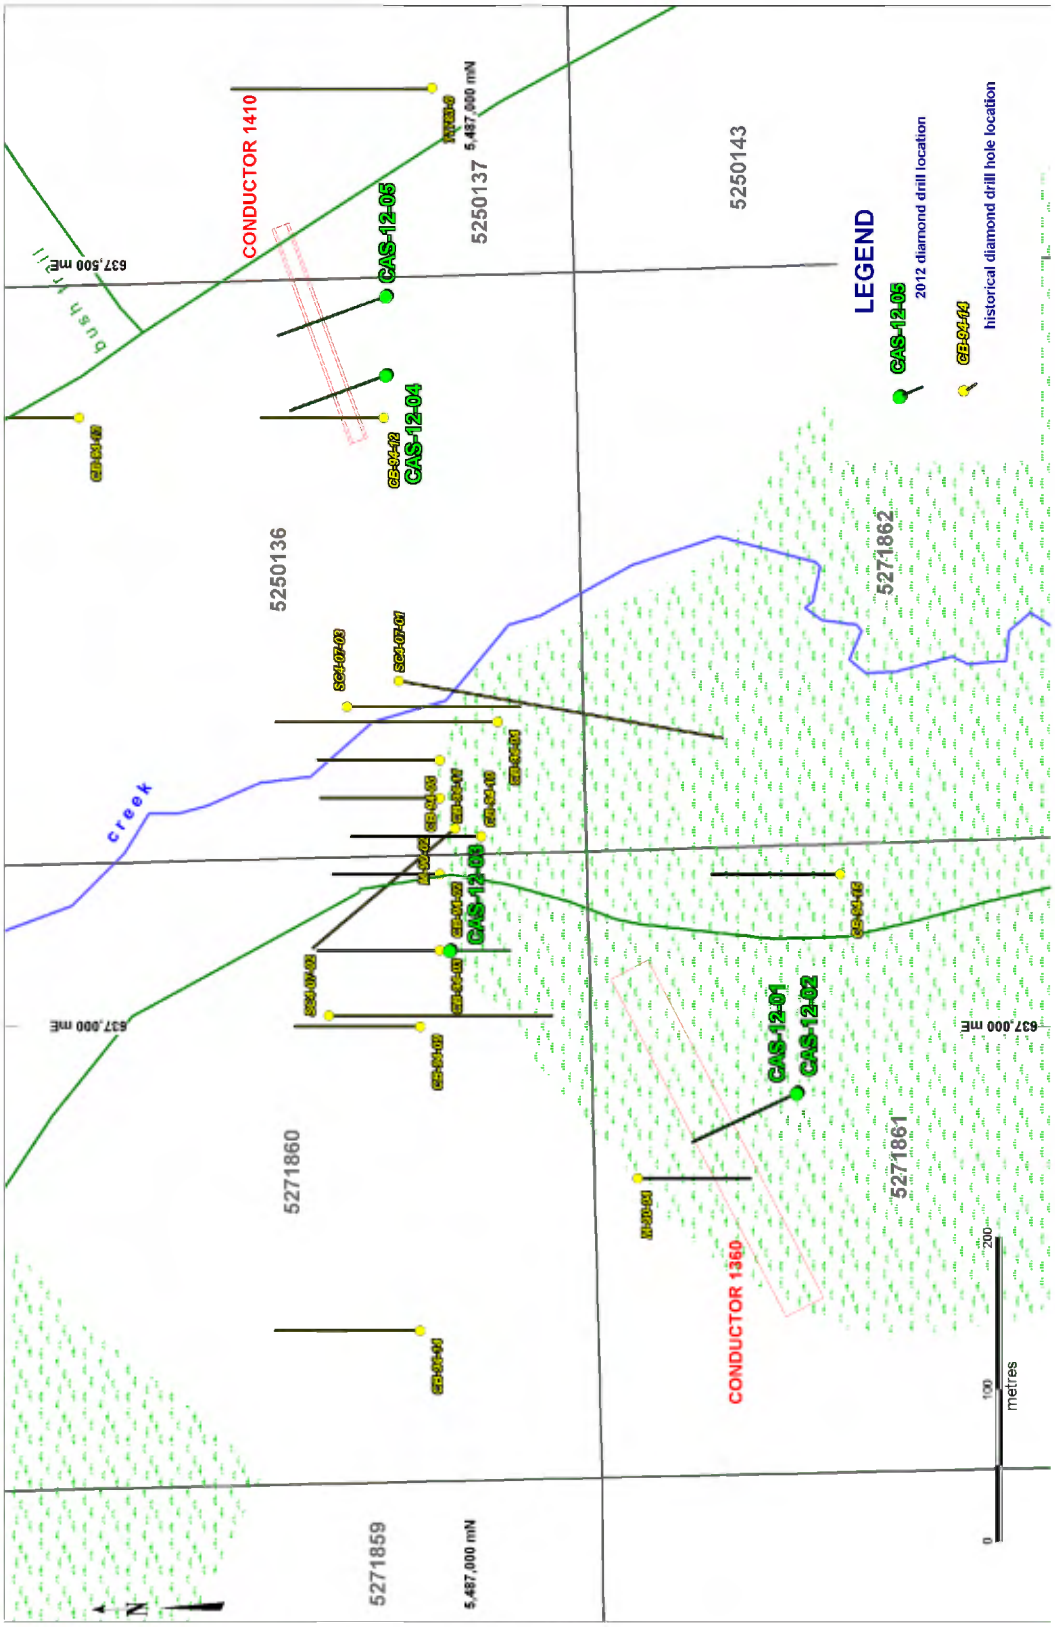

4.2 Discussion of Results

Five holes (CAS-12-01 to CAS-12-05) totalling 706.9 metres were drilled in this program. Hole CAS-12-01 and 02 were located on claim 4271861 to test VTEM Anomaly 1360 while hole CAS-12-03 was drilled on claim 5271860 as a ~50 metre step out from hole SC4-07-02 drilled by Cava in 2007 which intersected low grade gold mineralization (2.56 gpt gold from 147.0-150.0 metres) hosted within fuchsite-sericite schist. This intercept was located well south of the historic Glen Auden Gold Zone. Holes CAS-12-04 and 05 were drilled on claim 5250136 to test VTEM Anomaly 1410 **(see Table 2 and Figure 10)**. The holes were generally drilled in a south to north direction, as the geology is believed to generally strike east - west and is interpreted to be sub vertical in dip.

4.2.1 Holes CAS-12-01 and 02

Diamond drill holes CAS-12-01 (118.0 metres) and 02 (150.0 metres) were drilled from the same setup (636956E, 5486785N at an azimuth of 335 degrees and at dips of -50 and -60 degrees respectively **(See Map 1)** to test VTEM Conductor 1360(**see Figure 10**) **.** Overburden thickness was between 30 to 35 metres. The holes intersected grained basalt to andesite before encountering a ~10 metre zone of siliceous-sericite alteration (possible chert?) containing 10-15% pyrrhotite and pyrite (likely source of the VTEM conductor). Stratigraphically below this zone both holes intersected fragmental units (possible conglomerate?) before encountering more basalt -andesite.

No significant mineralization was encountered the best assay result was from hole CAS-12-01 which returned 0.023 gpt gold and 12 gpt silver from 72.2 metres to 73.0 metres.

4.2.2 Holes CAS-12-03

Diamond drill hole CAS-12-03 65 (100.9 metres) was a ~50 metre step out to the east from historic hole SC4-07-02 which encountered low grade gold mineralization within an altered schist unit located ~40 metres south of the Glen Auden Gold Zone. Hole CAS-12-03 was collared at 637050E and 5487013N and drilled at azimuth of 180 and a dip of -65 degrees **(See Map 3)**. Overburden thickness was ~15 metres. The hole encountered mainly unaltered basalt with a few fragmental horizons and a narrow quartz feldspar porphyry sill or dyke.

No significant alteration, mineralization or assays was noted in hole CAS-12-03.

4.2.3 Holes CAS-12-04 and 05

Diamond drill holes CAS-12-04 (159.0 metres) and 05 (179.0 metres) were drilled to test VTEM Conductor 1410 **(see Figures 10).** Diamond drill hole CAS-12-04 was collared at (637428E, 5487055N at an azimuth of 340 degrees and a dip of -65 degrees, while drill hole CAS-12-05 was collared at 637480E, 5487055N also at an azimuth of 340 and a dip of -65 degrees (**see MAPS 4 and 5).**

Overburden thickness in holes CAS-12-04 and 05 was ~20 metres. Virtually all of the lithologies intersected on both holes were altered to various degrees, often making the determination of any protolith impossible. Both holes collared in altered (sericite-chlorite) basalts to andesites, with local sections of strong foliation (shearing?) containing fragmental intervals. Hole CAS-12-05 differed from hole CAS-12-04 in that it encountered a significant zone of chert-argillite-iron formation (from 39.2 to 77.3 metres). This zone is believed to be the cause of the magnetic anomaly seen in the airborne survey and may also represent the same iron formation unit observed in the historical drilling at the Glen Auden Gold Zone.

From 94.65 metres in hole CAS-12-04 and 122.25 metres in hole CAS-12-05 the rock units were intensely altered to sericite-quartz +carbonate +/-fuchsite, locally brecciated and containing intervals of coarse grained pyrite and quartz flooding. Anomalous gold values, in excess of 50 ppb gold are commonly found within this alteration package. Best gold values were found in those intervals containing more significant pyrite and silica flooding. Assay values include 5.81 gpt / 0.80 metres (from 96.10 to 96.90 metres and 3.82 gpt/1.20 metres (from 104.40 to 105.6 metres in holes CAS-12-04 and 5.00 gpt/1.4 metres (from 122.25 to 124.50 metres) and 6.11 gpt/1.50 metres (from 136.50 to 138.00 metres) in hole CAS-12-05.

The gold mineralization encountered in holes CAS-12-04 and 05 may represent the down-dip and strike extension of the mineralization encountered in historic hole CB-94-12 which returned 6.03 gpt/1.5 metres and 2.39 gpt/1.8 metres **(see Figure 11).**

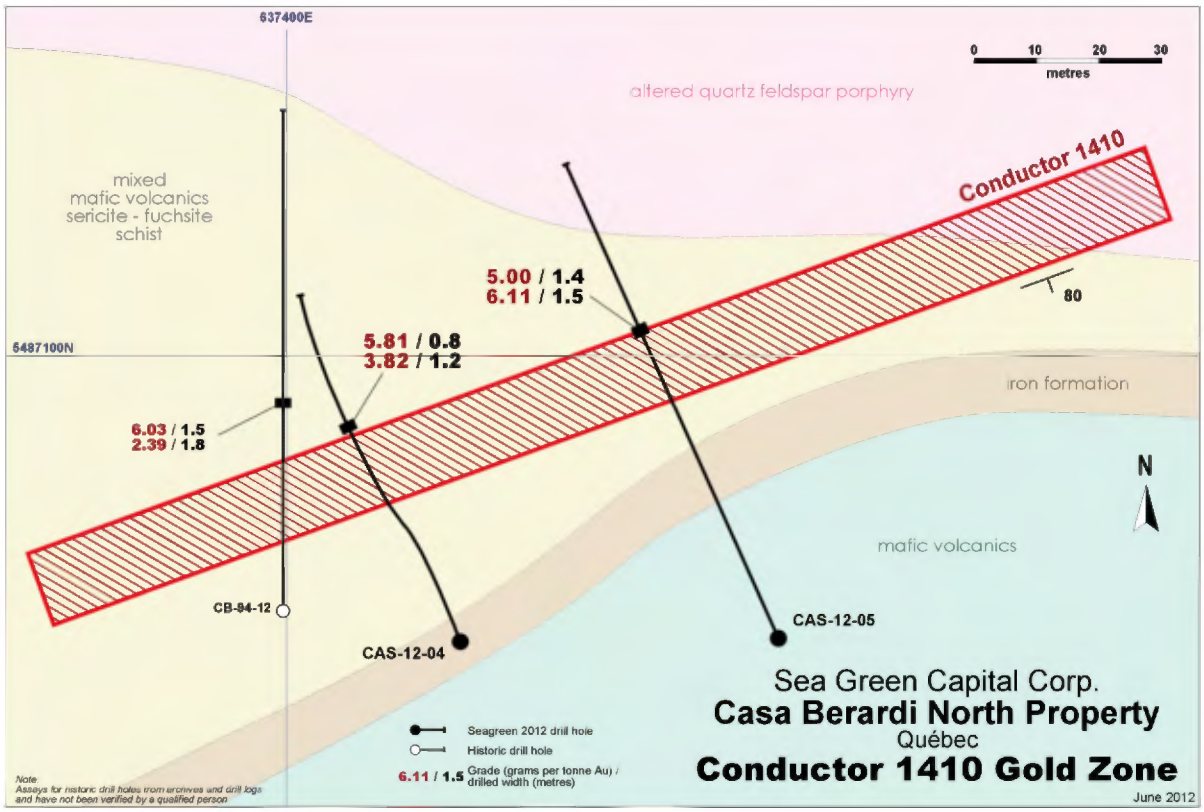


Figure 11: Diamond Drill Hole Locations and Assay Highlights Conductor 1410 Zone

5.0 CONCLUSIONS AND RECOMMENDATIONS

1) During the first quarter of 2012 the diamond drill program carried out on the Cava Resources Inc. ("Cava") Casa Berardi North Claim Group encountered anomalous and significant gold values in holes CAS-12-04 and 05. This mineralization was hosted within highly altered sericite-fuchsite schists. The property warrants further investigation. A budget of $360,000 is proposed.

2) Diamond drilling done on the property to date has partially outlined an intermittent gold zone (the Glen Auden Gold Zone and its possible strike extensions to the east and west) over a strike length of nearly 700 metres (from hole CB-94-14 to the west and CAS-12-05 to the east) and to a depth of +100 metres.

3) Significant gold mineralization is interpreted to be spatially associated with a major regional fault zone named the "Lac Janelle Fault Zone" which is located on the northwest margin of the synvolcanic Mistaouac Batholith.

4) More specifically, to date the gold mineralization found on the Casa Berardi North Property occurs along the flanks of a weak, deformed, and sinuous magnetic feature which likely corresponds to chert-iron formation encountered in Holes CAS-12-01, 02 and 05. Further the mineralization is associated with zones of sulphide mineralization which are believed to be the cause of several weak airborne conductive zones along the Lac Janelle Fault Zone **(see Figure 12).**

5) Follow-up work should include: 1) diamond drill testing of the untested conductive highlighted by a star in **Figure 12 (**4 holes – 600 metres), 2) step out holes from CB-94-14, which encountered anomalous gold mineralization and which were never followed up (3 holes- 500 metres), and 3) continue drill testing of the Conductor 1410 Zone (5 holes -1000 metres).

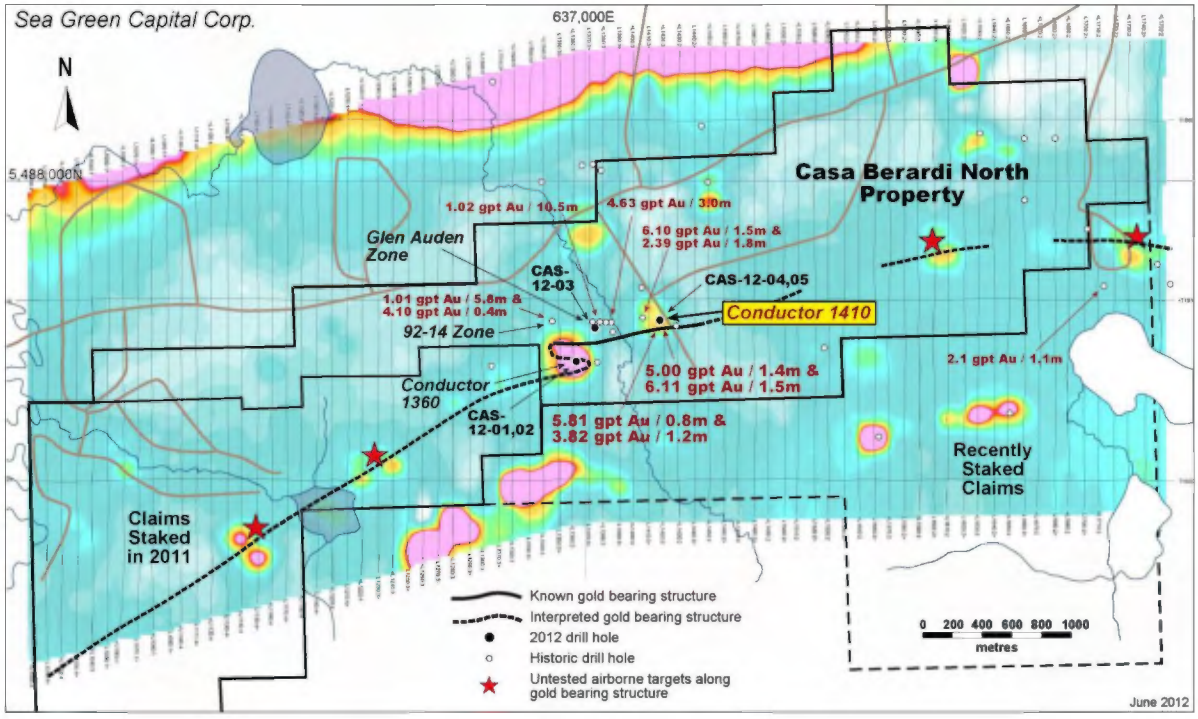


Figure 12: Diamond Drill Hole Highlights and Exploration Targets Showing Airborne Conductive Zones

CERTIFICATE of AUTHOR

I, Mitchell E. Lavery, P. Geo., (OGQ #181) do hereby certify that:

1. I am a consulting geologist, located at 1806 rue Ctadelle, Val d'Or, Québec, Canada, J9P 4W3

2. I graduated with a B.A. in Economic Geology in 1976 from The University of Western Ontario (London, ON, Canada).

3. I am a member of the *Ordre des géologues du Québec* (OGQ #181).

4. I have over 37 years experience as a geologist in the exploration and mining industry. My exploration expertise has been acquired with numerous junior and senior mining companies in North America, South America and west Africa since graduation. I have been an independent consulting geologist since July 1991.

5. I have read the definition of "Qualified Person" set out in Regulation 43-101 and certify that by reason of my education, affiliation with a professional association (as defined in Regulation 43-101) and past relevant work experience, I fulfill the requirements to be a "Qualified Person" within the meaning of Regulation 43-101.

6. I am responsible for the supervision of all field and core shack work on the Casa North Property (Abitibi, Québec), **WORK REPORT Of THE 2012 DIAMOND DRILLING PROGRAM ON THE CASA BERARDI NORTH CLAIM GROUP,CASA BERARDI AREA, QUEBEC, For CAVA RESOURCES INC.** dated September 2012 (the "Report").

6. I have had no prior involvement with the property that is the subject of the Report.

7. I am not aware of any material fact or material change with respect to the subject matter of the Report that is not reflected in the Report and for which the omission to disclose would make the Report misleading.

8. I am independent of the issuer applying the tests in section 1.4 of Regulation 43-101. I do not own any securities of Cava Resources Inc.

9. I have read Regulation 43-101 respecting standards of disclosure for mineral projects and Form 43-101 F1.

10. I consent to the filing of the Report with any stock exchange and other regulatory authority and any publication by them for regulatory purposes, including electronic publication in the public company files on their websites accessible by the public, of the Report.

Dated this 25th Day of September, 2012

GÉOLOGUE / GEOLOGIST MITCHELL E. LAVERY # 181 QUÉBEC

Mitchell E. Lavery, P. Geo.

REÇU AU MRNF
19 MARS 2014
DIRECTION DES TITRES MINIERS

1391950

APPENDIX – I

Diamond Drill Hole Logs/Reports

DRILL HOLE REPORT

Hole Number: **CAS-12-01** Project: **CASA BERARDI** Project Number: **001**

Drilling

Azimuth:	335
Dip:	50
Length:	118
Started:	26-Feb-12
Completed:	01-Mar-12
Logged:	27-Mar-12

Comment:

Casing

Length:	44.8
Pulled:	yes
Capped:	yes
Cemented:	no

Core

Dimension:	NQ
Storage:	Val D' Or
Section:	
Hole Type	DD

Location

Township:	CASA BERA
Claim No.:	5271861
NTS:	32E11
Hole:	SURFACE

Coordinate - Gemcom

East:	636956
North:	5486785
Elev.:	280

Coordinate - UTM

East:	636956
North:	5486785
Elev.:	280
Zone: 17	**NAD:** NAD83

Other

Logged by:	**Mitch Lavery (OGQ #181)**, Terry Coyle
Relog by:	
Contractor:	9208-1934 Que
Spotted by:	Richard Lavoie
Surveyed:	
Surveyed by:	GPS
Geophysics:	None
Geophysic Contractor:	
Left in hole:	
Making water:	no
Multi shot survey:	no

Deviation Tests

Distance	*Azimuth*	*Dip*	*Type*	*Good*	*Comments*
0.00	335.00	-50.00	C	☑	
60.00	335.00	-48.00	F	☑	Mag 57570
118.00	338.20	-45.40	F	☑	Mag 57770



LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-01** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
0.00	44.80	**OB** ***Overburden*** swamp-sand with basal boulders						
44.80	72.20	**AND** ***Andesite*** fine grained-equigranular-homogeneous-medium greenish gray-massive-7-10% off white anhedral fine to coarse feldspar phenocrysts	E5471801	71.70	72.20	0.50	0.001	0.1

Minor Interval:
45.00 45.01 CB *carbonate*
3 cm cb/minor qz vein at 45 dtca

Minor Interval:
46.40 46.41 CB *carbonate*
5 cn carbonate/minor qz 50 dtca

Minor Interval:
57.00 72.20 STKW *Stockwork*
moderately developed stockwork of carb stringers-most at 35 dtca-host is slightly lighter coloured due to alteration by carb

Minor Interval:
55.30 55.31 CB *carbonate*
10 cm-cb.minor qz vein at 50 dtca

Minor Interval:
72.20 72.20 CONT *Contact*
contact sharp at 60 dtca

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-01** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
72.20	80.45	**AMZ** ***Alteration/Mineralization Zone***	E5471802	72.20	73.00	0.80	0.023	12.0
		in general, a rock banded with pale sericite/silica bands for intervals up to 15 cm alternating with fine bands of sulphide and bands of light gray host-non silicified. Intermittently, there are off white cherty looking aphanitic intervals to 30 cm long which are laced with a hairline to fine stockwork of black stringers-large patches of yellowish of siliceous light gray host-aphanitic-fracture controlled po>py vnlts to 1 cm-patches of white quartz carry 5% po>cp	E5471803	73.00	73.65	0.65	0.001	0.1
			E5471804	73.65	74.35	0.70	0.001	0.1
			E5471805	74.35	75.55	1.20	0.001	0.1
			E5471806	75.55	76.55	1.00	0.003	0.1
			E5471808	76.55	77.55	1.00	0.001	0.1
			E5471809	77.55	78.10	0.55	0.001	0.1
			E5471810	78.10	79.10	1.00	0.010	0.3
			E5471811	79.10	80.10	1.00	0.009	0.3
		Minor Interval:	E5471812	80.10	80.45	0.35	0.003	1.3
		78.10 80.45 AMZ *Alteration/Mineralization Zone*						
		main mineralized interval-10-15% po>py>cp-narrow bands 60-80 dtca						
80.45	89.85	**Vcl** ***Volcaniclastic***	E5471814	81.25	81.80	0.55	0.006	0.1
		medium to dark green aphanitic-spotty stringers of carb-non magnetic-intervals of rounded light green clasts laced with an open white carb stringer stockwork- 80.45-81.25-coarsely clastic-weakly foliated 45 dtca-2-3% fracture controlled po>py -	E5471815	81.80	82.45	0.65	0.001	0.1
			E5471816	82.45	83.35	0.90	0.011	0.3
		Minor Interval:						
		80.45 81.25 Bx *Breccia*						
		clastic interval-weakly foliated 45 dtca-2-3% fracture controlled po>py						
		Minor Interval:						
		81.25 86.00 SHR *Shearing*						
		moderately sheared-intervals of mineralization and deformation as noted in sample descriptions						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-01** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
89.85	109.80	**AND** ***Andesite***	E5471817	89.85	90.25	0.40	0.011	0.1
		Andesite or Basalt or Diorite-locally strongly carb'd- weakly foliated at 45 dtca-homogeneous-soft -non magnetic-stockwork as at 80.45-no visible sulphide or as noted	E5471818	98.55	99.55	1.00	0.001	0.1
			E5471819	99.55	100.35	0.80	0.003	0.1
			E5471820	104.00	104.60	0.60	0.002	0.1
			E5471821	105.40	106.20	0.80	0.004	0.1
			E5471822	108.00	109.00	1.00	0.022	0.1
			E5471823	109.00	109.80	0.80	0.016	0.1
		Minor Interval:						
		98.55 100.35 STKW *Stockwork*						
		stockwork intensifies- 5 cm Qz/Cb 35 dtca-1-2 % disseminated po>py-patches of pale green silica alteration						
109.80	115.75	**QEP** ***Quartz Eye Porphyry***	E5471824	109.80	110.80	1.00	0.041	0.1
		aphanitic-pale olive green sericitized matrix-abundant angular to rounded medium gray translucent Qz eyes to 2-3 mm long dimension-1% disseminated pyrite-moderately hard but can be scratched-upper contact sharp 45 dtca-lower contact sharp 40 dtca						
115.75	118.00	**AND** ***Andesite***						
		Andesite?-medium green massive homogeneous-very fine grained-rare carb stringers 30 to 45 dtca						
118.00	0.00	**EOH** ***End of Hole***						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-01** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)

DRILL HOLE REPORT

Hole Number: **CAS-12-02** Project: **CASA BERARDI** Project Number: **001**

Drilling

Azimuth:	335
Dip:	60
Length:	150
Started:	05-Mar-12
Completed:	12-Mar-12
Logged:	29-Mar-12

Comment:

Casing

Length:	42
Pulled:	yes
Capped:	yes
Cemented:	no

Core

Dimension:	NQ
Storage:	Val D' Or
Section:	
Hole Type	DD

Location

Township:	CASA BERA
Claim No.:	5271861
NTS:	32E11
Hole:	SURFACE

Coordinate - Gemcom

East:	636956.4
North:	5486785
Elev.:	280

Coordinate - UTM


East:	636956.4
North:	5486785
Elev.:	280
Zone: 17	**NAD:** NAD83

Other

Logged by:	**Mitch Lavery (OGQ #181)**, Terry Coyle
Relog by:	
Contractor:	9208-1934 Que
Spotted by:	Richard Lavoie
Surveyed:	yes
Surveyed by:	GPS
Geophysics:	
Geophysic Contractor:	
Left in hole:	Casing
Making water:	no
Multi shot survey:	no

Deviation Tests

Distance	*Azimuth*	*Dip*	*Type*	*Good*	*Comments*
0.00	335.00	-60.00	C	☑	
52.00	330.30	-58.40	F	☑	Mag ??
100.00	326.00	-58.00	F	☑	Mag- 57580 nT
150.00	331.80	-57.50	F	☑	Mag 58650 nT

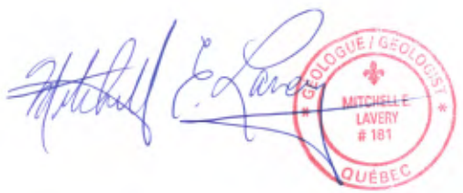

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-02** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
0.00	42.00	**OB** ***Overburden***						
42.00	63.40	**BAS** ***Basalt*** fine grained homogeneous-massive-salt and pepper texture-overall dark green-pervasively weakly chloritized-non magnetic -contact broken						
		Minor Interval: 57.75 57.75 QTZ *Quartz Vein* 1-2 cm quartz at 45 dtca						
		Minor Interval: 47.00 47.00 QTZ *Quartz Vein* 3 cm quartz at 50 dtca						
		Minor Interval: 54.00 54.20 QTZ *Quartz Vein* bull quartz- 45 dtca						
		Minor Interval: 55.00 55.00 QTZ *Quartz Vein* 5 cm white bull quartz-contacts 65 and 80 dtca						
		Minor Interval: 57.50 57.50 QTZ *Quartz Vein* 3 cm white bull quartz-90 dtca-local chlorite staining						
63.40	70.75	**BAS** ***Basalt*** coarser salt and pepper texture but still fine-approximately 10% medium to coarse ragged sucrose						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-02** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		textured slightly pink-non carbonate-feldspar?-anhedral to rounded -these appear to be the same material as lighter matrix of salt and pepper texture						
70.75	86.75	**BAS** ***Basalt*** same as at 42 meters-	E5471826	72.15	72.45	0.30	0.008	0.1

Minor Interval:
72.15 72.45 Q/C *Quartz/Carbonate vein*
swarm of narrow quartz/carbonate veinlets to 1 cm- 90 dtca

Minor Interval:
81.00 81.00 QTZ *Quartz Vein*
3 cm of smoky quartz- 40 dtca

Minor Interval:
84.00 86.75 SHR *Shearing*
very weakly foliated at 35 dtca- core slightly lighter hue

Minor Interval:
86.75 86.75 CONT *Contact*
contact 35 dtca

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-02** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
86.75	97.70	**AZ** ***Alteration Zone*** laminated to banded chert/chlorite siltstone	E5471827	86.75	87.75	1.00	0.003	0.1
			E5471828	87.75	88.35	0.60	0.003	0.1
			E5471829	88.35	88.80	0.45	0.004	0.1
			E5471830	88.80	89.45	0.65	0.005	0.1
			E5471831	89.45	90.10	0.65	0.002	0.1
			E5471832	90.10	90.95	0.85	0.023	0.3
			E5471834	95.95	96.75	0.80	0.001	0.1

Mineralization Maj. :	***Type/Style/%Mineral***	***Comment***
88.35 - 88.50	PO Lam 20	
88.80 - 89.45	POPY Lam 20	20 % sulphide-contorted lams-45 dtca-15% po/5% py-This in lower 1/2
94.25 - 96.75	POPY DIS 2	usually hosted within carb bands

Minor Interval:

86.76 88.35 CHT *Chert*

light gray-sheared chert-45 dtca-cherty layers predominate-lesser sericite as greenish gray alternate bands- 1-2% visible po

Minor Interval:

88.35 88.80 AMZ *Alteration/Mineralization Zone*

15 cm of laminated pyrrhotite alternates with pale gray chlorite bands at 45 dtca-followed by interval of bleached very fine grained basalt

Minor Interval:

88.80 89.45 AMZ *Alteration/Mineralization Zone*

20% sulphide -contorted lams- 45 dtca-15% po/5% py-sulphides in lower 1/2 of intervals-upper 1/2 is controted chert and sericitized lams finely folded-also 20 cm of light gray chert with fine po fracture filling- 45 dtca-clots of injected quartz have distinct chlorite/sericite lams

Minor Interval:

89.45 90.10 SIL *Silicification*

very siliceous interval-widely banded-dark gray aphanitic to greenish sericitic to light gray-no visible sulphide

Minor Interval:

90.10 90.95 SER *Sericitization*

alternating bands of chlorite to sericite-green

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-02** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		Minor Interval:						
		90.95 94.25 Deb *Debris Flow* Debris Flow or slump Breccia-plymictic clasts-no gradation-clasts rounded-clasts pale siliceous gray to aphanitic sericitized-several angular clasts 54 cm on a side-clusters of chocolate brown angular aphanitic grains-core angle progressively flattens from 30 to 0 dtca at the end of the interval-clasts diminish with depth but remain coarse						
		Minor Interval:						
		94.25 96.75 SER *Sericitization* pale olive sericite bands alternate with dark green chlorite bands which alternate with dark gray to pale gray cherty bands which alternate with fine grained off white carbonate bands. The carb bands are the host of most mineral which is, overall, 2-3% po>py						
		Minor Interval:						
		96.75 97.70 SER *Sericitization* dark gray to light olive mottled -aphanitic-short intervals of yellowish silica/epidote alteration						
97.70	114.65	**BAS** ***Basalt*** altered basalt-aphanitic-medium green-moderately developed carb stockwork-rare short intervals of yellowish silica/epidote alteration	E5471835	103.30	104.20	0.90	0.011	0.1
		Mineralization Maj. : ***Type/Style/%Mineral*** ***Comment*** 110.75 - 111.90 POPY SM 30 5 cm of crude coarse po>py-contorted 70 dtca						
		Minor Interval:						
		103.30 104.20 SIL *Silicification* silicified-10% magnetite lams at 50 dtca-short cherty looking intervals or intense quartz flooding-last 20 cm laminated with medium to coarse grains and cubes of po>py>cp- 15% total sulphide						
		Minor Interval:						
		108.70 111.50 Deb *Debris Flow* slump breccia or debris flow similar to previous at 90.95-alignment 40 dtca-upper contact not distinct-lower contact 40 dtca-sharp						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-02** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		Minor Interval:						
		111.75 111.75 CB *carbonate*						
		5 cm carb vein at 40 dtca						
114.65	150.00	**BAS** ***Basalt***	E5471836	134.15	134.65	0.50	0.001	0.1
		fine grained salt and pepper textured-massive-scattered carbonate stringers at random angles	E5471837	139.80	140.20	0.40	0.003	0.1
		Minor Interval:						
		122.50 122.50 CB *carbonate*						
		3 cm carb veinlet at 70 dtca						
		Minor Interval:						
		123.50 123.50 CB *carbonate*						
		ragged bands , streaks and lenses of carb at 40 dtca						
		Minor Interval:						
		134.15 134.65 QTZ *Quartz Vein*						
		bull quartz-ragged contacts						
		Minor Interval:						
		135.55 135.55 CB *carbonate*						
		3 cm zoned carb vein at 30 dtca						
		Minor Interval:						
		135.90 135.90 QTZ *Quartz Vein*						
		12 cm quartz vein-numerous host inclusions-45 dtca						
		Minor Interval:						
		137.40 137.85 EPI *epidotization*						
		epidotized host with 20 cm carb vein at 20 dtca						
		Minor Interval:						
		139.90 140.10 QTZ *Quartz Vein*						
		3 cm quartz vein at 65 dtca						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-02** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology			Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		Minor Interval:								
		140.80	140.80	QTZ *Quartz Vein*						
				12 cm bull quartz vein -70 dtca						
		Minor Interval:								
		141.30	141.30	QTZ *Quartz Vein*						
				5 cm bull quartz-ragged contacts-numerous inclusions of host						
		Minor Interval:								
		146.20	146.20	QTZ *Quartz Vein*						
				10 cm bull quartz at 45 dtca						
150.00	0.00	**EOH**	***End of Hole***							

DRILL HOLE REPORT

Hole Number: **CAS-12-03** Project: **CASA BERARDI** Project Number: **001**

Drilling
Azimuth: 340
Dip: 65
Length: 100.9
Started: 13-Mar-12
Completed: 14-Mar-12
Logged: 02-Apr-12
Comment:

Casing
Length: 19
Pulled: yes
Capped: yes
Cemented: no

Core
Dimension: NQ
Storage: Val D' Or
Section:
Hole Type DD

Location
Township: CASA BERA
Claim No.: 5271861
NTS: 32E11
Hole: SURFACE


Other
Logged by: **Mitch Lavery (OGQ #181),**Terry Coyle
Relog by:
Contractor: 9208-1934 Que
Spotted by: Richard Lavoie
Surveyed: yes
Surveyed by: GPS
Geophysics:
Geophysic Contractor:
Left in hole:
Making water: no
Multi shot survey: no

Coordinate - Gemcom
East: 637050
North: 5487013
Elev.: 280

Coordinate - UTM
East: 637050
North: 5487013
Elev.: 280
Zone: 17 **NAD:** NAD83

Deviation Tests

Distance	*Azimuth*	*Dip*	*Type*	*Good*	*Comments*
0.00	180.00	-50.00	C	☑	
50.00	34.70	52.80		☐	Mag 19210?-not reliable-no concentration of mineral at this depth
100.00	180.00	-49.70	F	☑	Mag -57130

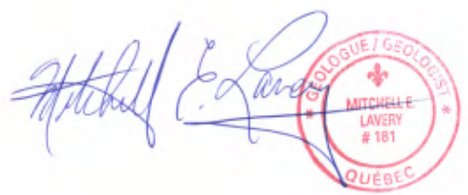

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-03** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
0.00	19.00	**OB** ***Overburden***						
19.00	28.50	**LTUF** ***Lapilli Tuff*** fine salt and pepper texture bearing 7-10% angular yellowish aphanitic clasts from mm to 2-3 cm long dimension. Fragments are often medium green to light pink at their centers. Non carbonatized save for scattered carb stringers at 80-90 dtca. Contact arbitrary						
28.50	42.00	**BAS** ***Basalt*** fine salt and pepper texture-similar to previous-no frags						

Minor Interval:

31.00 42.00 BICH *Bleached*

bleached to medium gray-undeformed-non siliceous-numerous veinlet-like bands of cream coloured alteration with diffuse contacts usually 60 and 90 dtca- 1-2 % disseminated pyrite-rare qz veinlet to 2 cm at 80 dtca

Minor Interval:

40.45 40.50 Q/Ak *Quartz/Ankerite Vein*

5 cm quartz/ankerite vein- 60 dtca

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-03** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		Minor Interval:						
		40.65 40.65 Q/Ak *Quartz/Ankerite Vein*						
		3 cm Quartz/ankerite veinlet 80-dtca						
42.00	52.75	**LTUF** ***Lapilli Tuff***						
		return of fragments-still altered to medium gray-greatly diminished bands of alteration						
52.75	97.50	**BAS** ***Basalt***	E5471838	62.30	63.00	0.70	0.003	0.1
		As at 28.5-contacts not discernible	E5471839	63.00	64.00	1.00	0.001	0.1
		Minor Interval:						
		59.70 62.30 BICH *Bleached*						
		slightly bleached to a dark beige-open stockwork of carb stringers- 1-2% dis'd pyrite						
		Minor Interval:						
		62.30 63.00 QTZ *Quartz Vein*						
		3 X 3 cm quartz veins at 75 dtca-merging selvedges with abundant fine to medium bleb and cubic pyrite- 7 to 10%						
		Minor Interval:						
		63.00 64.00 QTZ *Quartz Vein*						
		dark beige host-very fine grained 5 cm q/cb vein at 65 dtca-well mineralized selvedges for 2 cm						
		Minor Interval:						
		64.00 64.55 Ser + *Strongly sericitized*						
		dark beige altered-fine grained-soft						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-03** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology		Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		Minor Interval:							
		66.85 66.85	Q/C *Quartz/Carbonate vein*						
		1.5 cm q/cb veinlet- 45 dtca- blebs chalcopyrite							
		Minor Interval:							
		69.20 69.20	Q/C *Quartz/Carbonate vein*						
		3 cm qz/cb vein at 45 dtca							
		Minor Interval:							
		71.40 74.40	CB *carbonate*						
		moderate swarm of carb stringers 70 dtca							
		Minor Interval:							
		72.40 72.40	Q/C *Quartz/Carbonate vein*						
		4 cm qz/cb vein at 80 dtca							
		Minor Interval:							
		74.40 76.25	SHR *Shearing*						
		moderate shearing at 65 dtca-fine hairline stockwork of cb stringers							
		Minor Interval:							
		80.55 80.55	Q/C *Quartz/Carbonate vein*						
		3 cm qz/cb at 70 dtca							
		Minor Interval:							
		79.40 81.65	SHR *Shearing*						
		moderate shearing at 80 dtca							
		Minor Interval:							
		81.65 81.65	QTZ *Quartz Vein*						
		3 cm quartz vein at 80 dtca							
		Minor Interval:							
		86.60 88.50	SHR *Shearing*						
		moderately sheared-abundant carb streaks- 70 dtca-includes 5 cm quartz at 70 dtca							
		Minor Interval:							
		90.65 92.75	SHR *Shearing*						
		strongly sheared at 45 dtca-clusters of carb laminations and bands parallel to foliatiion							

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-03** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		Minor Interval:						
		93.25 93.25 Q/C *Quartz/Carbonate vein*						
		4 cm - 65 dtca						
		Minor Interval:						
		95.00 95.00 Q/C *Quartz/Carbonate vein*						
		2 cm qz/cb-large blebs cpy> po- 45 dtca						
97.50	100.90	**QEP** ***Quartz Eye Porphyry***	E5471840	98.25	99.00	0.75	0.001	0.1
		abundant rounded to angular translucent quartz phenocrysts in an aphanitic gray to beige sericite altered matrix	E5471841	99.00	100.00	1.00	0.001	0.1
		Minor Interval:						
		97.50 98.25 SHR *Shearing*						
		strongly sheared-texture destroyed						
		Minor Interval:						
		98.25 98.50 BICH *Bleached*						
		70% white sucrose bands- 40-45 dtca						
		Minor Interval:						
		99.00 100.90 SHR *Shearing*						
		texture intact-abundant rounded dark translucent quartz eyes-moderately sheared- 40-45 dtca						
100.90	0.00	**EOH** ***End of Hole***						
		End of Hole						

DRILL HOLE REPORT

Hole Number: **CAS-12-04** Project: **CASA BERARDI** Project Number: **001**

Drilling
Azimuth: 340
Dip: 65
Length: 159
Started: 24-Mar-12
Completed: 01-Apr-12
Logged: 03-Apr-12
Comment:

Casing
Length: 23
Pulled: yes
Capped: yes
Cemented: no

Core
Dimension: NQ
Storage: Val D' Or
Section:
Hole Type DD

Location
Township: CASA BERA
Claim No.: 5271861
NTS: 32E11
Hole: SURFACE


Other
Logged by: **Mitch Lavery (OGQ #181),** Terry Coyle
Relog by:
Contractor: 9208-1934 Que
Spotted by: Richard Lavoie
Surveyed:
Surveyed by: GPS
Geophysics:
Geophysic Contractor:
Left in hole:
Making water: no
Multi shot survey: no

Coordinate - Gemcom
East: 637428
North: 5487055
Elev.: 280

Coordinate - UTM
East: 637428
North: 5487055
Elev.: 280
Zone: 17 **NAD:** NAD83

Deviation Tests

Distance	*Azimuth*	*Dip*	*Type*	*Good*	*Comments*
0.00	340.00	-65.00	C	☑	
60.00	329.70	-67.80	F	☑	Mag-34270 nT??-no significant mineral at this depth
110.00	31.70	3.40		☐	No good
159.00	345.00	-66.60	F	☑	Mag - 95340 nT??-AZ and dip seem reasonable

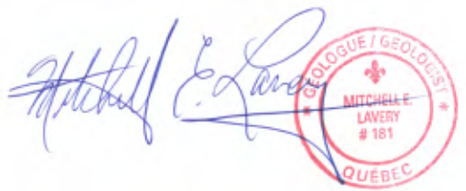

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-04** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
0.00	23.00	**OB** ***Overburden***						
23.00	67.70	**A Bas** ***Altered Basalt*** weak pervasive sericite-dark grayish green-weakly to moderately foliated 30-45 dtca-soft-non magnetic-non carb'd- 23-26.7: light gray aphanitic- 26.7 - 38:abundant fine silky flecks of lavender coloured leucoxene-becomes finer downward to 38 meters-34.95-35.45:medium gray green aphanitic dyke-like-41.3-49.85- dark green, aphanitic- 49.85 to 53.7:moderately foliated-abundant streaks, clots, lenses of aphanitic light gray material (silt?) which were probably laminations- intervals of chaotic disturbance of former bands and lams-most are still dark green and 25-30 dtca- overal 5-7 % fine to medium bleb and cubic pyrite in incipient bands and lams	E5471842	23.30	24.30	1.00	0.001	0.1
			E5471844	40.70	41.30	0.60	0.001	0.1
			E5471845	42.55	43.40	0.85	0.005	0.1
			E5471847	43.40	44.10	0.70	0.009	0.1
			E5471848	44.10	44.70	0.60	0.004	0.1
			E5471849	48.15	48.90	0.75	0.001	0.1
			E5471850	48.90	49.85	0.95	0.015	0.1
			E5471851	49.85	50.50	0.65	0.008	6.7
			E5471852	50.50	51.30	0.80	0.001	0.1
			E5471853	51.30	52.40	1.10	0.001	0.4
			E5471854	52.40	53.20	0.80	0.002	0.1
			E5471855	53.20	54.20	1.00	0.005	0.7
			E5471856	54.20	55.00	0.80	0.075	0.1
		Minor Interval: 23.30 24.30 laminated dark gray to cream- 30 dtca-invaded by several quartz/Tourmaline pods-rusted intensely along fractures						
		Minor Interval: 25.80 26.70 Q/Ak *Quartz/Ankerite Vein* Qz/Ak veinlet- 1 cm -parallel to core-1-2% dis py-intense limonite present on scattered fractures down to 41 meters						
		Minor Interval: 34.95 35.45 CB *carbonate* swarm of fine Qz/Cb stringers 30-45 dtca-parallel to sharp contacts						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-04** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		Minor Interval:						
		36.00 38.00 CB *carbonate*						
		common carbonate stringers 20-45 dtca						
		Minor Interval:						
		40.70 41.30 SIL *Silicification*						
		30 cm of siliceous pale yellow disrupted silty lams-chaotic contacts 30 dtca-interval includes 3 cm Qz/Ak vein at 35 dtca-also several clots of contorted Qz/Tl						
		Minor Interval:						
		42.55 44.70 LSS *Laminated Siltstone*						
		scattered light gray remnant bands to contorted light gray parallel bands of fine altered siltstone-non carb'd- 3-5% rounded to cubic fine to medium pyrite in incipient laminations						
		Minor Interval:						
		53.20 55.00 MBIF *Magnetite Chert Banded Iron Formation*						
		20-25 dtca-abundant aphanitic lams and bands of purplish black magnetite alternating with bands and lams of light gray chert/ silt- qz bands increase at the base of the interval						
		Minor Interval:						
		58.10 62.80 SER *Sericitization*						
		light grayish green host-numerous pale alteration lams and bands 30 dtca-no visible sulphide-no carbonate						
67.70	74.30	**ZShMin** ***Zone of Shearing and Mineralization***	E5471857	67.70	68.30	0.60	0.019	0.1
		Zone of moderate shearing and Mineralization as described in samples	E5471858	68.30	69.30	1.00	0.001	0.1
			E5471859	69.30	70.00	0.70	0.007	0.2
			E5471860	70.00	70.40	0.40	0.004	0.8
			E5471861	70.40	71.25	0.85	0.001	1.4
			E5471862	71.25	72.00	0.75	0.001	0.1
			E5471863	72.00	72.70	0.70	0.002	0.1
			E5471864	72.70	73.40	0.70	0.008	0.1
			E5471865	73.40	74.30	0.90	0.014	1.0

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-04** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
74.30	80.15	**LTUF** ***Lapilli Tuff*** altered lap tuff-strongly pervasively sericitized-lapillit visible over most of interval-lapilli to 5 cm long stretched at 30 dtca-soft-non silicified-pale beige gray-80.15-probable contact sharp at 30 dtca	E5471867	74.90	75.40	0.50	0.009	0.1
80.15	85.45	**A Bas** ***Altered Basalt*** strongly altered aphanitic volcanic-pervasive sericite yellowish beige-non silicified-occasional clusters of a fine gray stockwork-faint weak foliation at 30 dtca-rock occasionally looks contorted but this is faint-1% pyrite overall	E5471868	80.80	81.30	0.50	0.193	4.1
			E5471869	83.50	84.50	1.00	0.001	0.1
		Minor Interval: 85.45 85.45 CONT *Contact* probable sharp contact at 30 dtca						
85.45	87.45	**LTUF** ***Lapilli Tuff*** Same as previous						
87.45	92.15	**A Bas** ***Altered Basalt*** pale beige-aphanitic numerous fine lams and stringers of qz-weakly foliated 25-30 dtca- three qz veins 3 cm to 10 cm ar various angles-one with a large spalsh of cpy						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-04** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
92.15	94.65	**LTUF** ***Lapilli Tuff*** Altered coarse lapilli Tuff-beige gray mottled-numerous beige stretched lapilli often with dark rims aligned 30 dtca	E5471870	92.15	93.15	1.00	0.001	0.1
			E5471872	93.15	94.15	1.00	0.002	0.1
			E5471873	94.15	94.65	0.50	0.004	0.1
94.65	105.60	**AMZ** ***Alteration/Mineralization Zone*** zone of strongly sericitie altered aphanitic volcanic and possibly finely tuffaceous intervals alternating with intervals of qz with or without tourmaline and /or py, as described- 2-3 % dis blebs of pyrite	E5471874	94.65	95.30	0.65	0.020	0.1
			E5471875	95.30	96.10	0.80	0.740	0.1
			E5471876	96.10	96.90	0.80	5.810	1.8
			E5471877	96.90	98.00	1.10	0.011	0.1
			E5471878	98.00	98.50	0.50	0.006	0.1
			E5471879	98.50	99.00	0.50	0.001	0.1
			E5471880	99.00	100.00	1.00	0.018	0.1
		Minor Interval:	E5471881	100.00	100.55	0.55	0.016	0.1
		105.60 105.60 CONT *Contact* contact arbitrary	E5471882	100.55	101.25	0.70	0.004	0.1
			E5471883	101.25	102.25	1.00	0.010	0.1
			E5471884	102.25	102.95	0.70	0.004	0.1
			E5471886	102.95	103.55	0.60	0.003	0.1
			E5471887	103.55	104.40	0.85	0.001	0.1
			E5471888	104.40	105.60	1.20	3.820	0.1

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-04** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
105.60	114.95	**U/K** ***Protolith Unknown*** light greenish beige due to weak pervasive fuchsite and strongly pervasive sericite-weakly foliated 30 dtca-non silicified-scratches with effort-homgeneous-aphanitic to fine grained	E5471890	105.60	106.50	0.90	0.087	0.1
			E5471891	106.50	107.00	0.50	0.035	0.1
			E5471760	107.00	108.00	1.00	0.005	0.1
			E5471892	108.00	109.25	1.25	0.003	0.1
			E5471893	111.25	111.90	0.65	0.011	0.1
		Minor Interval: 109.25 111.25 U/K *Protolith Unknonwn* 1-2 py						
		Minor Interval: 111.90 114.95 U/K *Protolith Unknonwn* as at 105.6- 1-2 % py-3 cm and 2 cm vnlts qz at 80 dtca						
114.95	118.90	**U/K** ***Protolith Unknown*** may be a variation of the foregoing-moderately sheared 30 dtca-complete and partial off white bands locally to 1 cm-colour varies from fine mottled cream and dark gray to emerald green flecks and bands alternating with cream coloured bands and streaks-non carb'd-weakly to moderately siliceous-scratches wih effort-there may be a relict stretched intrusive texture- trace to 1% fine pyrite	E5471894	117.40	118.40	1.00	0.001	0.1
			E5471895	118.40	118.90	0.50	0.003	0.1
118.90	121.65	**U/K** ***Protolith Unknown*** possible QEP-weakly sheared 30 dtca-homogeneous texture of altered black/gray and pale yellow-medium grained-probably qz eyes present- weak to moderate silicification-scratched with effort-trace to 1% fine dis py	E5471761	118.90	120.00	1.10	0.001	0.1
			E5471762	120.00	121.00	1.00	0.004	0.1
			E5471763	121.00	121.60	0.60	0.002	0.1

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-04** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
121.65	127.45	**U/K** ***Protolith Unknown*** possible QEP-fine salt and pepper pale green /pale cream -weakly sheared host 30 dtca-pervasive weak to moderate fuchsite/chl? alteration-12-15% ragged silky medium to coarse blebs of pale brown leucoxene or ankerite-3-5% fine to medium bleb to cubic pyrite-overall rock is homogeneous and a light yellowish green	E5471896	121.65	122.65	1.00	0.004	0.1
			E5471897	122.65	123.75	1.10	0.034	0.1
			E5471898	123.75	124.40	0.65	0.001	0.1
			E5471899	124.40	125.00	0.60	0.038	0.1
			E5471900	125.00	126.00	1.00	0.002	0.1
			E5471901	126.00	127.00	1.00	0.148	0.1
			E5471902	127.00	127.45	0.45	0.006	0.1
127.45	131.60	**QTZ** ***Quartz Vein*** 80 % quartz-abundant small bleached inclusions-scattered clusters or solitary grains of Tourmaline-pyrite as noted-upper contact is 15-20 dtca	E5471903	127.45	128.45	1.00	0.005	0.1
			E5471904	128.45	129.45	1.00	0.001	0.1
			E5471905	129.45	130.10	0.65	0.284	0.3
			E5471906	130.10	130.80	0.70	0.009	0.1
			E5471908	130.80	131.60	0.80	0.032	0.1
131.60	139.00	**U/K** ***Protolith Unknown*** as at 121.65 but moderately sheared 35 dtca-colour is pale gray beige-minor fuchsite influence-trace to 1% fine py	E5471909	135.00	136.00	1.00	0.054	0.1
			E5471910	136.00	137.00	1.00	0.010	0.1
			E5471911	137.00	138.00	1.00	0.192	0.3
			E5471912	138.00	138.50	0.50	0.003	0.1
			E5471913	138.50	139.00	0.50	0.005	0.1

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-04** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
139.00	142.10	**Q/T/Py** ***Quartz/Tourmaline/Pyrite Vein*** Zone of qz/tl/py veins as described	E5471914	139.00	139.85	0.85	0.068	0.1
			E5471916	139.85	140.35	0.50	0.017	0.1
			E5471917	140.35	141.00	0.65	0.104	0.1
			E5471918	141.00	141.45	0.45	0.294	0.1
			E5471919	141.45	142.10	0.65	0.010	0.1
		Minor Interval: 142.10 142.10 CONT *Contact* contact gradual						
142.10	149.45	**U/K** ***Protolith Unknown*** as at 121.65-weak to moderate shearing-weak pervasive emerald green colour due to fuch? Chl?-1-2% pyrite or as noted	E5471920	142.10	143.10	1.00	0.006	0.1
			E5471764	143.10	144.00	0.90	0.001	0.1
			E5471765	144.00	145.00	1.00	0.002	0.1
			E5471766	145.00	145.80	0.80	0.003	0.1
			E5471921	145.80	146.30	0.50	0.004	0.1
			E5471922	146.30	147.15	0.85	0.003	0.1
			E5471924	147.15	147.65	0.50	0.006	0.1
			E5471925	147.65	148.65	1.00	0.002	0.1
			E5471926	148.65	149.45	0.80	0.030	0.1
149.45	155.15	**U/K** ***Protolith Unknown*** As at 114.95-stretched intrusive appearance-strong shearing at 35-40 dtca-no visible sulphide						
		Minor Interval: 155.15 155.15 CONT *Contact* probable contact marked by 1.5 cm qz/ak vnlt at 25 dtca						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-04** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology		Sample #	From	To	Length	Au (g/t)	Ag (g/t)
155.15	159.00	**LTUF**	***Lapilli Tuff***	E5471927	158.40	159.00	0.60	0.003	0.1
		probaly strongly sericitie altered lapilli tuff-aphanitic matrix-sometime the faint outline of what might be lapilli are seen-lapilli from 1-3 cm and lighter hue than matrix-weakly sheared to massive-two intervals of 20 cm of leaching and limonite							
159.00	0.00	**EOH**	***End of Hole***						

DRILL HOLE REPORT

Hole Number: **CAS-12-05** Project: **CASA BERARDI** Project Number: **001**

Drilling

Azimuth:	340
Dip:	65
Length:	179
Started:	15-Mar-12
Completed:	24-Mar-12
Logged:	10-Apr-12

Comment:

Casing

Length:	28.2
Pulled:	yes
Capped:	yes
Cemented:	no

Core

Dimension:	NQ
Storage:	Val D' Or
Section:	
Hole Type	DD

Location

Township:	CASA BERA
Claim No.:	5271861
NTS:	
Hole:	SURFACE

Coordinate - Gemcom

East:	637480
North:	5487055
Elev.:	280

Coordinate - UTM

East:	637480
North:	5487055
Elev.:	280
Zone: 17	**NAD:** NAD83

Other

Logged by:	**Mitch Lavery (OGQ #181),**Terry Coyle
Relog by:	
Contractor:	92 08-1934 Que
Spotted by:	Richard Lavoie
Surveyed:	
Surveyed by:	GPS
Geophysics:	
Geophysic Contractor:	
Left in hole:	
Making water:	no
Multi shot survey:	no

Deviation Tests

Distance	*Azimuth*	*Dip*	*Type*	*Good*	*Comments*
0.00	340.00	-65.00	C	☑	
45.00	335.70	-61.70		☑	probably ok!!
80.00	270.00	16.90	F	☐	useless?-magnetic material through length of hole
130.00	0.50	68.30	F	☐	useless?-magnetic material through length of hole
180.00	50.90	59.00	F	☐	useless-magnetic material through length of hole



LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-05** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)		Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
0.00	28.20	**OB**	***Overburden***						
28.20	39.20	**BAS**	***Basalt***	E5471928	28.20	29.00	0.80	0.004	0.1
			basalt with minor brecciated chert-dark green-aphanitic-locally strongly carbonatized-basalt carries abundant angular fragments of light gray whh are sometimes brecciated in situ-fragments aligned at 30 dtca-mineralization as noted in sample description	E5471929	29.00	30.00	1.00	0.063	1.3
				E5471930	30.00	31.00	1.00	0.006	0.1
				E5471931	31.00	32.00	1.00	0.006	0.1
				E5471932	32.00	33.00	1.00	0.006	0.1
				E5471934	33.00	34.00	1.00	0.005	0.1
				E5471935	34.00	35.00	1.00	0.002	0.1
				E5471936	35.00	36.00	1.00	0.001	0.1
				E5471937	36.00	37.00	1.00	0.005	0.5
				E5471938	37.00	37.40	0.40	0.015	2.7
				E5471939	38.75	39.20	0.45	0.001	0.1
39.20	44.25	**BXCht**	***Brecciated Chert***	E5471940	39.20	40.00	0.80	0.001	0.1
			in situ brecciated chert-light gray- intense fine black stockwork of fractures-minor displacement of most frags-fragments aligned 30-35 dtca-intervals look tuffaceous due to strong shearing in places-contact arbitrary	E5471941	40.00	40.60	0.60	0.001	0.1
				E5471942	40.60	41.30	0.70	0.004	0.1
				E5471943	41.30	42.00	0.70	0.041	1.0
				E5471944	42.00	42.80	0.80	0.007	0.6
				E5471767	42.80	43.85	1.05	0.003	0.1
				E5471946	43.85	44.25	0.40	0.001	0.1
44.25	49.10	**SS**	***Siltstone***						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-05** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		probable aphanitic siltstone-soft-homogeneous- weakly pervasively carbonatized-rare bands to 1 cm thick at 35 dtca-no fragments discerned-						
		Minor Interval: 46.00 46.50 BXCht *Brecciated Chert* brecciated chert bands as previous						
		Minor Interval: 46.50 49.10 SER *Sericitization* sericite altered to a medium gray beige						
		Minor Interval: 49.10 49.10 CONT *Contact* contact broken up						
49.10	58.55	**AZ** ***Alteration Zone*** sericite altered banded chert/siltstone-very distinctive-bands at 35 dtca-bands are predominantly pale yellow, aphanitic, strongly sericitized then dark green chloritic to salt and pepper textured-soft-these alternate with pale gray fine bands to lams of chert-no visible sulphide-rarely, dark bands carry abundant pyrite ,fine to medium bleb to cubic-no carbonate	E5471947	57.00	57.50	0.50	0.001	0.1
			E5471948	57.50	58.20	0.70	0.002	0.1
58.55	61.65	**MBIF** ***Magnetite Chert Banded Iron Formati*** fine bands to 1-2 cm at 35-40 dtca-locally bands are disrupted-overall 10-12% sulphide po>py>cp	E5471949	58.55	59.10	0.55	0.001	0.1
			E5471951	59.10	59.50	0.40	0.001	0.1
			E5471952	59.50	60.50	1.00	0.015	0.1
			E5471953	60.50	61.65	1.15	0.009	0.1

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-05** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
61.65	67.15	**QEP** ***Quartz Eye Porphyry*** possible altered quartz eye felsic volcanic-						
		Minor Interval: 61.65 63.85 SER *Sericitization* medium gray beige due to sericite-massive-5% light gray translucent phenocrysts of quartz-rounded						
		Minor Interval: 63.85 66.00 SHR *Shearing* overall medium gray with a yellowish caste-10% stretched translucent gray fine to medium quartz phenocrysts in moderately sheared host- 30 dtca						
		Minor Interval: 66.00 67.15 SER *Sericitization* same as at 61.65						
67.15	77.30	**MBIF** ***Magnetite Chert Banded Iron Formati*** banding at 35 dtca- similar to 58.55	E5471954	67.15	68.00	0.85	0.001	0.1
			E5471955	68.00	68.60	0.60	0.001	0.1
			E5471956	68.60	69.60	1.00	0.003	0.1
			E5471957	69.60	70.60	1.00	0.003	0.1
			E5471958	70.60	71.60	1.00	0.016	0.1
			E5471959	71.60	72.60	1.00	0.003	0.1
			E5471960	72.60	73.00	0.40	0.001	0.1
			E5471961	73.00	74.00	1.00	0.006	0.5
			E5471962	74.00	75.00	1.00	0.005	0.1
			E5471963	75.00	76.00	1.00	0.001	0.1
			E5471964	76.00	77.00	1.00	0.003	0.1

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-05** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
77.30	80.15	**BAS** ***Basalt*** dark green aphanitic	E5471965	77.00	78.00	1.00	0.006	0.2
			E5471768	78.00	78.50	0.50	0.027	0.3
			E5471966	78.50	79.25	0.75	0.022	1.7
			E5471967	79.25	80.15	0.90	0.023	0.9
80.15	106.50	**BAS** ***Basalt*** fine grained salt and pepper homogeneous textured-dark green-scattered epidote or carbonate stringers-massive-no visible sulphide-weak pervasive mag						
		Minor Interval: 105.10 106.50 ALT *Alteration* common ragged white flecks-fine to medium-non cabonatized						
106.50	122.25	**BAS** ***Basalt*** probable mafic volcanic-weakly foliated at 30 dtca-chaotic appearance-similar to foregoing-intervals of in situ brecciation-framents are slightly lighter hue(originally sed bands?)	E5471968	106.50	107.50	1.00	0.002	0.1
			E5471969	107.50	108.50	1.00	0.015	0.1
			E5471970	108.50	109.20	0.70	0.064	0.1
			E5471971	109.20	109.80	0.60	0.001	0.1
		Minor Interval: 113.10 114.45 Bx *Breccia* in situ breccia						
		Minor Interval: 116.30 116.95 Bx *Breccia* in situ breccia-5% disseminated pyrite						

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-05** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		Minor Interval:						
		120.55 122.25 SER *Sericitization*						
		weak sericite alteration						
		Minor Interval:						
		122.25 122.25 CONT *Contact*						
		contact arbitrary						
122.25	138.00	**U/K** ***Protolith Unknown***	E5471972	122.25	123.10	0.85	0.004	0.1
		a strongly sericitized possible lapilli tuff-weakly foliated at 45 dtca- occasional ghost fragments-soft- non carb'd- abundant pale cream blemishes due to alteration usually aligned at 30-35 dtca-common off white lams of same material-rock is aphanitic-no discernible quartz eyes	E5471973	123.10	124.00	0.90	6.160	1.4
			E5471974	124.00	124.50	0.50	2.880	0.9
			E5471976	124.50	125.00	0.50	0.016	0.1
			E5471772	125.00	126.00	1.00	0.006	-
			E5471773	126.00	127.00	1.00	0.002	-
			E5471774	127.00	128.00	1.00	0.002	-
			E5471775	128.00	129.00	1.00	0.009	-
			E5471776	129.00	130.00	1.00	0.005	-
			E5471777	130.00	131.00	1.00	0.032	-
			E5471778	131.00	131.90	0.90	0.015	-
			E5471977	131.90	133.10	1.20	0.011	0.1
			E5471769	133.10	133.60	0.50	0.013	0.1
			E5471978	133.60	134.10	0.50	0.012	0.1
			E5471770	134.10	135.00	0.90	0.007	0.2
			E5471771	135.00	135.90	0.90	0.001	0.1
			E5471979	135.90	136.50	0.60	0.070	0.1
			E5471981	136.50	137.50	1.00	6.580	1.1
			E5471982	137.50	138.00	0.50	5.160	1.4

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-05** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology
138.00	179.00	**Aintr** ***Altered Intrusive***
		-the many different intervals in the following are interpreted to be all derived from the same protolith principally because , in all cases, the changes from one to the other are gradational-fine rounded or stretched quartz eyes are rarely discernible
		Minor Interval:
		138.00 138.01 CONT *Contact*
		contact sharp at 50 dtca
		Minor Interval:
		138.01 140.15 SER *Sericitization*
		weakly foliated-light beige- abundant fine emerald flecks-pale green-strongly sericitized-fine grained-scratches with effort-pale green caste-non carb'd-non sil'd-non magn.
		Minor Interval:
		140.15 140.16 CONT *Contact*
		contact gradual over 0.5 meters
		Minor Interval:
		140.16 148.30 Aintr *Altered Intrusive*
		possible diorite-altered-medium grained salt and pepper texture-massive-locally altered to previous rock at 138 m-rare tourmaline or tl/qz stringer at 70-90 dtca-rare pyrite bleb
		Minor Interval:
		148.30 149.15 SER *Sericitization*
		as at 138 m
		Minor Interval:
		149.15 149.16 CONT *Contact*
		contact gradual

Sample #	From	To	Length	Au (g/t)	Ag (g/t)
E5471983	138.00	138.55	0.55	0.019	0.1
E5471984	138.55	139.00	0.45	0.001	0.1
E5471985	139.00	139.40	0.40	0.003	0.1
E5471986	139.40	140.00	0.60	0.004	0.1
E5471987	149.15	150.00	0.85	0.034	0.1
E5471988	150.00	151.00	1.00	0.113	0.1
E5471989	151.00	152.00	1.00	0.018	0.1
E5471991	152.00	153.00	1.00	0.560	0.1
E5471992	153.00	154.00	1.00	0.031	0.1
E5471993	154.00	155.00	1.00	0.027	0.1
E5471995	162.35	163.35	1.00	0.001	0.1
E5471996	169.00	169.45	0.45	0.002	0.1
E5471997	170.00	170.65	0.65	1.300	0.1
E5471998	172.50	172.90	0.40	0.009	0.5
E5471999	175.15	175.90	0.75	-	-

LITHOLOGY REPORT
- Detailed -

Hole Number: **CAS-12-05** Project: **CASA BERARDI** Project Number: **001**

From (m)	To (m)	Lithology	Sample #	From	To	Length	Au (g/t)	Ag (g/t)
		Minor Interval:						
		149.16 156.65 SHR *Shearing* pale green-moderately sheared-fine grained-stretched- 70 dtca diminishing to 20 dtca with depth-abundant fine ragged stretched silky light brown fine to medium flecks leucoxene-pyrite and veining as noted- 152 to 153-notable folding into gentle arc of original foliation between two 1 cm QT vnlts- 3% cpy blotches in veins-5-7 fine to coarse cubic pyrite						
		Minor Interval:						
		156.65 160.85 U/K *Protolith Unknown* blurred texture-coarse grained salt and pepper -off white/dark green-moderately sheared 30 dtca-possible diorite protolith(or gabbro)-numerous flecks of leucoxene-soft-dull-no vislble sulphide						
		Minor Interval:						
		160.85 160.86 CONT *Contact* gradual contact						
		Minor Interval:						
		160.86 175.15 Aintr *Altered Intrusive* similar to 138m but no emerald green grains-colour light gray green-common quartz eyes to 2 mm-rounded-abundant flecks of leucoxene-weakly folaited at 45 dtca						
		Minor Interval:						
		175.15 179.00 Aintr *Altered Intrusive* same as 156.65-moderate to strong shearing 35 dtca-175.15-175.9-3-5% fine pyrite						
179.00	0.00	**EOH** ***End of Hole***						

APPENDIX – II

Drill Hole Assay Sheets

CASA BERARDI ASSAY RESULTS 2012

HOLE ID	FROM	T0	INTERVAL	Augpt	Aggpt	Asppm	Cuppm	Znppm	STANDARD
CAS-12-01	71.70	72.20	0.50	0.001	0.1	32	126	105	
CAS-12-01	72.20	73.00	0.80	0.023	12	19	388	94	
CAS-12-01	73.00	73.65	0.65	0.001	0.1	41	97	89	
CAS-12-01	73.65	74.35	0.70	0.001	0.1	31	175	94	
CAS-12-01	74.35	75.55	1.20	0.001	0.1	10	62	34	
CAS-12-01	75.55	76.55	1.00	0.003	0.1	8	88	39	
CAS-12-01	76.55	77.55	1.00	0.001	0.1	7	108	26	
CAS-12-01				<0.002	<0.2	14	10.6	21.2	BLANK
CAS-12-01	77.55	78.10	0.55	0.001	0.1	9	139	603	
CAS-12-01	78.10	79.10	1.00	0.010	0.3	44	274	335	
CAS-12-01	79.10	80.10	1.00	0.009	0.3	22	300	48	
CAS-12-01				7.31	7.3	118	1080	1240	CND-GS-7E
CAS-12-01	80.10	80.45	0.35	0.003	1.3	9	505	51	
CAS-12-01	81.25	81.80	0.55	0.006	0.1	6	294	166	
CAS-12-01	81.80	82.45	0.65	0.001	0.1	7	171	138	
CAS-12-01	82.45	83.35	0.90	0.011	0.3	3	334	85	
CAS-12-01	89.85	90.25	0.40	0.011	0.1	16	367	63	
CAS-12-01	98.55	99.55	1.00	0.001	0.1	11	146	68	
CAS-12-01	99.55	100.35	0.80	0.003	0.1	12	255	99	
CAS-12-01	104.00	104.60	0.60	0.002	0.1	9	197	132	
CAS-12-01	105.40	106.20	0.80	0.004	0.1	9	114	78	
CAS-12-01	108.00	109.00	1.00	0.022	0.1	11	149	138	
CAS-12-01	109.00	109.80	0.80	0.016	0.1	9	50	142	
CAS-12-01				3.7	1.5	684	83.9	166	CND-GS-4D
CAS-12-01	109.80	110.80	1.00	0.041	0.1	6	11	36	
CAS-12-02	72.15	72.45	0.30	0.008	0.1	11	28	39	
CAS-12-02	86.75	87.75	1.00	0.003	0.1	9	473	46	
CAS-12-02	87.75	88.35	0.60	0.003	0.1	10	32	15	
CAS-12-02	88.35	88.80	0.45	0.004	0.1	14	277	37	
CAS-12-02	88.80	89.45	0.65	0.005	0.1	5	943	24	
CAS-12-02	89.45	90.10	0.65	0.002	0.1	6	75	21	
CAS-12-02	90.10	90.95	0.85	0.023	0.3	7	247	46	
CAS-12-02				<0.002	<0.2	13	15.3	17.5	BLANK
CAS-12-02	95.95	96.75	0.80	0.001	0.1	9	57	17	
CAS-12-02	103.30	104.20	0.90	0.011	0.1	9	313	27	
CAS-12-02	134.15	134.65	0.50	0.001	0.1	6	7	20	
CAS-12-02	139.80	140.20	0.40	0.003	0.1	9	187	77	
CAS-12-03	62.30	63.00	0.70	0.003	0.1	1780	159	33	
CAS-12-03	63.00	64.00	1.00	0.001	0.1	506	81	45	
CAS-12-03	98.25	99.00	0.75	0.001	0.1	23	30	30	
CAS-12-03	99.00	100.00	1.00	0.001	0.1	19	7	19	
CAS-12-04				<0.002	<0.2	12	11.9	18.5	BLANK
CAS-12-04	23.30	24.30	1.00	0.001	0.1	31	131	52	
CAS-12-04	40.70	41.30	0.60	0.001	0.1	12	76	84	
CAS-12-04	42.55	43.40	0.85	0.005	0.1	37	539	93	
CAS-12-04				3.6	1.3	654	74.5	149	CND-GS-4D
CAS-12-04	43.40	44.10	0.70	0.009	0.1	60	727	63	
CAS-12-04	44.10	44.70	0.60	0.004	0.1	34	260	94	

CASA BERARDI ASSAY RESULTS 2012

HOLE ID	FROM	T0	INTERVAL	Augpt	Aggpt	Asppm	Cuppm	Znppm	STANDARD
CAS-12-04	48.15	48.90	0.75	0.001	0.1	9	74	74	
CAS-12-04	48.90	49.85	0.95	0.015	0.1	8	9	121	
CAS-12-04	49.85	50.50	0.65	0.008	6.7	15	401	84	
CAS-12-04	50.50	51.30	0.80	0.001	0.1	30	246	57	
CAS-12-04	51.30	52.40	1.10	0.001	0.4	18	245	54	
CAS-12-04	52.40	53.20	0.80	0.002	0.1	23	231	96	
CAS-12-04	53.20	54.20	1.00	0.005	0.7	12	397	36	
CAS-12-04	54.20	55.00	0.80	0.075	0.1	29	355	47	
CAS-12-04	67.70	68.30	0.60	0.019	0.1	26	797	96	
CAS-12-04	68.30	69.30	1.00	0.001	0.1	11	112	164	
CAS-12-04	69.30	70.00	0.70	0.007	0.2	36	1190	190	
CAS-12-04	70.00	70.40	0.40	0.004	0.8	42	1080	155	
CAS-12-04	70.40	71.25	0.85	0.001	1.4	59	2300	87	
CAS-12-04	71.25	72.00	0.75	0.001	0.1	16	366	207	
CAS-12-04	72.00	72.70	0.70	0.002	0.1	23	426	147	
CAS-12-04	72.70	73.40	0.70	0.008	0.1	31	751	82	
CAS-12-04				7.66	7.1	120	1100	1270	CND-GS-7E
CAS-12-04	73.40	74.30	0.90	0.014	1	356	1260	72	
CAS-12-04	74.90	75.40	0.50	0.009	0.1	47	117	64	
CAS-12-04	80.80	81.30	0.50	0.193	4.1	332	205	35	
CAS-12-04	83.50	84.50	1.00	0.001	0.1	86	15	55	
CAS-12-04	92.15	93.15	1.00	0.001	0.1	73	17	38	
CAS-12-04				<0.002	<0.2	13	11.3	23.2	BLANK
CAS-12-04	93.15	94.15	1.00	0.002	0.1	75	25	64	
CAS-12-04	94.15	94.65	0.50	0.004	0.1	88	40	49	
CAS-12-04	94.65	95.30	0.65	0.020	0.1	127	52	45	
CAS-12-04	95.30	96.10	0.80	0.740	0.1	134	24	26	
CAS-12-04	96.10	96.90	0.80	5.810	1.8	345	90	22	
CAS-12-04	96.90	98.00	1.10	0.011	0.1	129	16	43	
CAS-12-04	98.00	98.50	0.50	0.006	0.1	125	10	39	
CAS-12-04	98.50	99.00	0.50	0.001	0.1	71	14	27	
CAS-12-04	99.00	100.00	1.00	0.018	0.1	152	173	47	
CAS-12-04	100.00	100.55	0.55	0.016	0.1	149	167	49	
CAS-12-04	100.55	101.25	0.70	0.004	0.1	131	39	68	
CAS-12-04	101.25	102.25	1.00	0.010	0.1	116	28	52	
CAS-12-04				7.62	7.1	125	1010	1230	CND-GS-7E
CAS-12-04	102.25	102.95	0.70	0.004	0.1	99	86	54	
CAS-12-04	102.95	103.55	0.60	0.003	0.1	126	67	56	
CAS-12-04	103.55	104.40	0.85	0.001	0.1	66	5	59	
CAS-12-04				<0.002	<0.2	16	14.3	17.6	BLANK
CAS-12-04	104.40	105.60	1.20	3.820	0.1	246	333	22	
CAS-12-04	105.60	106.50	0.90	0.087	0.1	422	77	36	
CAS-12-04	106.50	107.00	0.50	0.035	0.1	116	17	27	
CAS-12-04	107.00	108.00	1.00	0.005	0.1	127	77	28	
CAS-12-04	108.00	109.25	1.25	0.003	0.1	149	19	29	
CAS-12-04	111.25	111.90	0.65	0.011	0.1	57	106	41	
CAS-12-04	117.40	118.40	1.00	0.001	0.1	247	18	34	
CAS-12-04	118.40	118.90	0.50	0.003	0.1	443	33	37	

CASA BERARDI ASSAY RESULTS 2012

HOLE ID	FROM	TO	INTERVAL	Augpt	Aggpt	Asppm	Cuppm	Znppm	STANDARD
CAS-12-04	118.90	120.00	1.10	0.001	0.1	469	77	80	
CAS-12-04	120.00	121.00	1.00	0.004	0.1	465	115	74	
CAS-12-04	121.00	121.60	0.60	0.002	0.1	502	98	89	
CAS-12-04	121.65	122.65	1.00	0.004	0.1	207	58	32	
CAS-12-04	122.65	123.75	1.10	0.034	0.1	176	62	20	
CAS-12-04	123.75	124.40	0.65	0.001	0.1	136	12	20	
CAS-12-04	124.40	125.00	0.60	0.038	0.1	193	10	16	
CAS-12-04	125.00	126.00	1.00	0.002	0.1	161	23	23	
CAS-12-04	126.00	127.00	1.00	0.148	0.1	1820	34	23	
CAS-12-04	127.00	127.45	0.45	0.006	0.1	210	10	20	
CAS-12-04	127.45	128.45	1.00	0.005	0.1	130	72	41	
CAS-12-04	128.45	129.45	1.00	0.001	0.1	28	6	40	
CAS-12-04	129.45	130.10	0.65	0.284	0.3	102	13	16	
CAS-12-04				4	1.2	657	69.4	134	CND-GS-4D
CAS-12-04	130.10	130.80	0.70	0.009	0.1	12	4	5	
CAS-12-04	130.80	131.60	0.80	0.032	0.1	109	40	27	
CAS-12-04	135.00	136.00	1.00	0.054	0.1	649	162	28	
CAS-12-04	136.00	137.00	1.00	0.010	0.1	227	124	28	
CAS-12-04	137.00	138.00	1.00	0.192	0.3	296	150	23	
CAS-12-04	138.00	138.50	0.50	0.003	0.1	352	29	24	
CAS-12-04	138.50	139.00	0.50	0.005	0.1	128	109	22	
CAS-12-04				<0.002	<0.2	14	10.6	21.2	BLANK
CAS-12-04	139.00	139.85	0.85	0.068	0.1	67	75	13	
CAS-12-04	139.85	140.35	0.50	0.017	0.1	279	7	20	
CAS-12-04	140.35	141.00	0.65	0.104	0.1	102	6	8	
CAS-12-04	141.00	141.45	0.45	0.294	0.1	301	20	26	
CAS-12-04	141.45	142.10	0.65	0.010	0.1	105	9	18	
CAS-12-04	142.10	143.10	1.00	0.006	0.1	168	111	28	
CAS-12-04	143.10	144.00	0.90	0.001	0.1	116	71	42	
CAS-12-04	144.00	145.00	1.00	0.002	0.1	150	85	44	
CAS-12-04	145.00	145.80	0.80	0.003	0.1	139	130	39	
CAS-12-04	145.80	146.30	0.50	0.004	0.1	110	82	33	
CAS-12-04				<0.002	<0.2	13	12.9	17.5	BLANK
CAS-12-04	146.30	147.15	0.85	0.003	0.1	89	45	28	
CAS-12-04	147.15	147.65	0.50	0.006	0.1	295	143	32	
CAS-12-04	147.65	148.65	1.00	0.002	0.1	194	136	26	
CAS-12-04	148.65	149.45	0.80	0.030	0.1	258	106	23	
CAS-12-04	158.40	159.00	0.60	0.003	0.1	170	29	53	
CAS-12-05	28.20	29.00	0.80	0.004	0.1	4	338	46	
CAS-12-05	29.00	30.00	1.00	0.063	1.3	11	1000	30	
CAS-12-05	30.00	31.00	1.00	0.006	0.1	24	194	122	
CAS-12-05	31.00	32.00	1.00	0.006	0.1	13	183	107	
CAS-12-05				7.22	7.4	129	1180	1360	CND-GS-7E
CAS-12-05	32.00	33.00	1.00	0.006	0.1	21	584	99	
CAS-12-05	33.00	34.00	1.00	0.005	0.1	13	301	106	
CAS-12-05	34.00	35.00	1.00	0.002	0.1	12	380	115	
CAS-12-05	35.00	36.00	1.00	0.001	0.1	8	127	104	
CAS-12-05	36.00	37.00	1.00	0.005	0.5	9	680	83	

CASA BERARDI ASSAY RESULTS 2012

HOLE ID	FROM	T0	INTERVAL	Augpt	Aggpt	Asppm	Cuppm	Znppm	STANDARD
CAS-12-05	37.00	37.40	0.40	0.015	2.7	39	966	80	
CAS-12-05	38.75	39.20	0.45	0.001	0.1	10	171	87	
CAS-12-05	39.20	40.00	0.80	0.001	0.1	13	269	48	
CAS-12-05	40.00	40.60	0.60	0.001	0.1	6	37	48	
CAS-12-05	40.60	41.30	0.70	0.004	0.1	5	342	53	
CAS-12-05	41.30	42.00	0.70	0.041	1	15	1030	83	
CAS-12-05				<0.002	<0.2	12	12	24.6	BLANK
CAS-12-05	42.00	42.80	0.80	0.007	0.6	34	1140	76	
CAS-12-05	42.80	43.85	1.05	0.003	0.1	18	120	53	
CAS-12-05	43.85	44.25	0.40	0.001	0.1	21	213	44	
CAS-12-05	57.00	57.50	0.50	0.001	0.1	27	29	13	
CAS-12-05	57.50	58.20	0.70	0.002	0.1	7	73	21	
CAS-12-05				3.76	1.4	628	74.1	145	CND-GS-4D
CAS-12-05	58.55	59.10	0.55	0.001	0.1	8	324	40	
CAS-12-05	59.10	59.50	0.40	0.001	0.1	7	34	24	
CAS-12-05	59.50	60.50	1.00	0.015	0.1	4	525	34	
CAS-12-05	60.50	61.65	1.15	0.009	0.1	6	508	28	
CAS-12-05	67.15	68.00	0.85	0.001	0.1	6	142	53	
CAS-12-05	68.00	68.60	0.60	0.001	0.1	7	42	32	
CAS-12-05	68.60	69.60	1.00	0.003	0.1	3	512	29	
CAS-12-05	69.60	70.60	1.00	0.003	0.1	8	314	84	
CAS-12-05	70.60	71.60	1.00	0.016	0.1	4	273	71	
CAS-12-05	71.60	72.60	1.00	0.003	0.1	7	140	35	
CAS-12-05	72.60	73.00	0.40	0.001	0.1	10	43	17	
CAS-12-05	73.00	74.00	1.00	0.006	0.5	5	565	57	
CAS-12-05	74.00	75.00	1.00	0.005	0.1	6	420	44	
CAS-12-05	75.00	76.00	1.00	0.001	0.1	6	286	74	
CAS-12-05	76.00	77.00	1.00	0.003	0.1	5	418	20	
CAS-12-05	77.00	78.00	1.00	0.006	0.2	4	695	89	
CAS-12-05	78.00	78.50	0.50	0.027	0.3	17	486	544	
CAS-12-05	78.50	79.25	0.75	0.022	1.7	55	2000	143	
CAS-12-05	79.25	80.15	0.90	0.023	0.9	90	902	57	
CAS-12-05	106.50	107.50	1.00	0.002	0.1	14	181	80	
CAS-12-05	107.50	108.50	1.00	0.015	0.1	12	73	93	
CAS-12-05	108.50	109.20	0.70	0.064	0.1	13	270	101	
CAS-12-05	109.20	109.80	0.60	0.001	0.1	12	73	90	
CAS-12-05	122.25	123.10	0.85	0.004	0.1	70	25	75	
CAS-12-05	123.10	124.00	0.90	6.160	1.4	486	81	21	
CAS-12-05				0.003	<0.2	13	11.4	22.5	BLANK
CAS-12-05	124.00	124.50	0.50	2.880	0.9	261	55	22	
CAS-12-05	124.50	125.00	0.50	0.016	0.1	255	57	46	
CAS-12-05	131.90	133.10	1.20	0.011	0.1	74	65	31	
CAS-12-05	133.10	133.60	0.50	0.013	0.1	85	39	54	
CAS-12-05	133.60	134.10	0.50	0.012	0.1	98	30	47	
CAS-12-05	134.10	135.00	0.90	0.007	0.2	123	137	65	
CAS-12-05	135.00	135.90	0.90	0.001	0.1	85	19	44	
CAS-12-05	135.90	136.50	0.60	0.070	0.1	199	14	24	
CAS-12-05				7.02	7.7	122	1150	1300	CND-GS-7E

CASA BERARDI ASSAY RESULTS 2012

HOLE ID	FROM	TO	INTERVAL	Augpt	Aggpt	Asppm	Cuppm	Znppm	STANDARD
CAS-12-05	136.50	137.50	1.00	6.580	1.1	349	18	19	
CAS-12-05	137.50	138.00	0.50	5.160	1.4	437	23	16	
CAS-12-05	138.00	138.55	0.55	0.019	0.1	244	6	28	
CAS-12-05	138.55	139.00	0.45	0.001	0.1	79	3	25	
CAS-12-05	139.00	139.40	0.40	0.003	0.1	426	14	29	
CAS-12-05	139.40	140.00	0.60	0.004	0.1	250	7	23	
CAS-12-05	149.15	150.00	0.85	0.034	0.1	248	38	28	
CAS-12-05	150.00	151.00	1.00	0.113	0.1	191	24	24	
CAS-12-05				<0.002	<0.2	12	12.4	19.7	BLANK
CAS-12-05	151.00	152.00	1.00	0.018	0.1	204	86	26	
CAS-12-05	152.00	153.00	1.00	0.560	0.1	224	159	25	
CAS-12-05	153.00	154.00	1.00	0.031	0.1	370	181	22	
CAS-12-05				3.85	1.4	620	75.3	140	CND-GS-4D
CAS-12-05	154.00	155.00	1.00	0.027	0.1	778	97	32	
CAS-12-05	162.35	163.35	1.00	0.001	0.1	58	18	43	
CAS-12-05	169.00	169.45	0.45	0.002	0.1	630	25	25	
CAS-12-05	170.00	170.65	0.65	1.300	0.1	8100	23	24	
CAS-12-05	172.50	172.90	0.40	0.009	0.5	207	411	48	

APPENDIX – III

Laboratory Certificates

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

CLIENT NAME: SEA GREEN CAPITAL CORP.
2899 7IE RUE
VAL-D-'OR, QC J9P6P6
(613) 298-1596

ATTENTION TO: MITCHELL LAVERY

PROJECT NO: CASA NORTH

AGAT WORK ORDER: 12U593496

SOLID ANALYSIS REVIEWED BY: Kevin Motomura, ICP Supervisor

DATE REPORTED: May 09, 2012

PAGES (INCLUDING COVER): 43

Should you require any information regarding this analysis please contact your client services representative at (905) 501-9998

*NOTES

All samples are stored at no charge for 90 days. Please contact the lab if you require additional sample storage time.

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
1760	<0.2	0.41	127	<5	7	<0.5	1	5.67	<0.5	<1	31.3	35.8	76.5	6.38
1761	<0.2	2.92	469	<5	2	<0.5	<1	5.94	<0.5	<1	59.1	161	77.4	6.23
1762	<0.2	2.94	465	<5	3	<0.5	<1	5.86	<0.5	<1	61.2	140	115	5.87
1763	<0.2	3.86	502	<5	3	<0.5	<1	6.53	<0.5	<1	68.2	185	98.3	7.03
1764	<0.2	0.43	116	<5	7	<0.5	<1	7.46	<0.5	<1	28.7	54.3	71.1	6.14
1765	<0.2	0.51	150	<5	5	<0.5	<1	6.99	<0.5	<1	30.4	43.6	84.6	6.29
1766	<0.2	0.42	139	<5	5	<0.5	<1	6.33	<0.5	<1	32.7	33.4	130	6.32
1767	<0.2	2.27	18	<5	1	<0.5	<1	1.13	<0.5	29	16.2	36.4	120	3.67
1768	0.3	6.94	17	21	3	<0.5	20	0.13	2.9	10	47.7	108	486	16.6
1769	<0.2	0.53	85	<5	9	<0.5	<1	1.17	<0.5	1	42.2	49.1	38.8	8.54
1770	0.2	0.58	123	<5	5	<0.5	8	1.08	1.0	3	50.7	24.7	137	9.06
1771	<0.2	0.35	85	<5	4	<0.5	<1	4.83	<0.5	<1	36.4	31.1	19.1	8.96
1801	<0.2	3.63	32	<5	3	<0.5	<1	7.99	<0.5	<1	32.3	296	126	5.53
1802	12.0	2.71	19	<5	14	<0.5	<1	11.2	<0.5	7	47.2	119	388	5.88
1803	<0.2	3.90	41	<5	24	<0.5	<1	12.9	<0.5	5	29.5	193	97.4	5.54
1804	<0.2	2.97	31	5	21	<0.5	<1	11.7	<0.5	3	26.5	191	175	4.40
1805	<0.2	1.27	10	<5	30	<0.5	<1	3.64	<0.5	13	10.1	38.2	62.2	1.89
1806	<0.2	1.33	8	<5	35	<0.5	<1	3.77	<0.5	13	15.2	20.2	88.1	2.29
1807	<0.2	0.63	14	8	55	<0.5	<1	9.43	<0.5	31	3.5	101	10.6	1.07
1808	<0.2	0.97	7	<5	29	<0.5	<1	2.02	<0.5	16	15.5	28.0	108	2.11
1809	<0.2	1.22	9	<5	31	<0.5	<1	2.43	5.7	15	18.3	57.0	139	3.18
1810	0.3	0.90	44	<5	40	<0.5	7	0.72	4.2	19	85.9	39.8	274	8.08
1811	0.3	1.50	22	<5	49	<0.5	7	0.41	0.6	12	60.3	41.0	300	12.6
1812	1.3	1.89	9	<5	6	<0.5	9	3.92	0.7	4	21.4	85.2	505	12.0
1813	7.3	1.58	118	<5	406	<0.5	<1	1.41	4.7	19	13.1	33.7	1080	4.06
1814	<0.2	2.36	6	<5	4	<0.5	1	0.99	<0.5	10	53.9	108	294	8.68
1815	<0.2	4.23	7	<5	2	<0.5	<1	1.64	<0.5	5	33.6	232	171	10.1
1816	0.3	1.63	3	<5	53	<0.5	1	0.25	<0.5	13	61.9	77.6	334	9.05
1817	<0.2	3.60	16	<5	<1	<0.5	2	3.87	<0.5	1	55.1	112	367	12.4
1818	<0.2	2.73	11	<5	2	<0.5	<1	12.1	<0.5	4	29.5	221	146	5.03
1819	<0.2	3.91	12	<5	2	<0.5	<1	7.40	<0.5	2	43.0	236	255	8.07
1820	<0.2	2.27	9	<5	2	<0.5	<1	5.83	0.9	<1	30.1	178	197	3.59

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
1821	<0.2	3.08	9	<5	2	<0.5	<1	7.44	<0.5	<1	32.7	242	114	5.35
1822	<0.2	5.19	11	9	1	<0.5	1	6.11	0.5	1	26.8	240	149	7.08
1823	<0.2	6.31	9	<5	1	<0.5	6	1.94	<0.5	<1	28.9	127	49.7	8.49
1824	<0.2	1.74	6	<5	68	<0.5	<1	0.95	<0.5	27	5.0	74.8	10.7	2.12
1825	1.5	0.41	684	12	74	<0.5	4	2.38	2.0	4	7.5	24.5	83.9	2.77
1826	<0.2	1.78	11	<5	5	<0.5	<1	8.92	<0.5	20	11.4	100	28.2	2.68
1827	<0.2	1.24	9	<5	23	<0.5	<1	3.94	<0.5	12	12.5	59.7	473	3.99
1828	<0.2	0.56	10	<5	55	<0.5	<1	2.13	<0.5	15	5.4	62.6	31.9	1.73
1829	<0.2	1.06	14	<5	13	<0.5	<1	5.46	<0.5	3	47.1	89.0	277	7.51
1830	<0.2	0.73	5	<5	22	<0.5	2	2.90	<0.5	<1	62.9	63.2	943	15.4
1831	<0.2	0.17	6	<5	9	<0.5	<1	7.36	<0.5	4	11.6	57.0	75.3	4.02
1832	0.3	1.83	7	<5	25	<0.5	1	5.53	<0.5	4	31.6	66.0	247	10.3
1833	<0.2	0.83	13	11	81	<0.5	<1	10.0	<0.5	37	5.0	138	15.3	1.41
1834	<0.2	0.42	9	<5	8	<0.5	<1	8.29	<0.5	5	3.1	43.7	56.9	2.53
1835	<0.2	0.93	9	<5	7	<0.5	5	3.83	0.6	2	26.3	104	313	10.2
1836	<0.2	0.50	6	<5	10	<0.5	<1	0.89	<0.5	1	3.7	254	6.6	1.20
1837	<0.2	2.68	9	<5	3	<0.5	<1	3.27	<0.5	<1	30.3	161	187	5.38
1838	<0.2	2.46	1780	<5	24	<0.5	<1	7.81	<0.5	2	38.8	111	159	6.71
1839	<0.2	3.79	506	<5	31	<0.5	<1	7.90	<0.5	3	33.0	155	81.3	7.32
1840	<0.2	1.85	23	<5	25	<0.5	<1	11.4	<0.5	16	6.0	41.1	30.3	2.22
1841	<0.2	1.31	19	<5	43	<0.5	<1	0.83	<0.5	34	3.9	55.2	7.3	1.67
1842	<0.2	1.52	31	7	50	<0.5	<1	3.90	<0.5	32	17.9	76.7	131	3.57
1843	<0.2	0.84	12	6	72	<0.5	<1	12.0	<0.5	31	3.5	107	11.9	1.48
1844	<0.2	4.34	12	<5	10	<0.5	<1	5.99	<0.5	3	22.4	158	76.2	9.27
1845	<0.2	5.21	37	<5	2	<0.5	4	6.60	0.7	<1	44.3	138	539	12.2
1846	1.3	0.38	654	6	99	<0.5	2	2.54	1.8	3	7.3	21.2	74.5	2.93
1847	<0.2	4.84	60	<5	2	<0.5	<1	9.57	<0.5	7	84.2	99.0	727	11.2
1848	<0.2	4.62	34	<5	1	<0.5	4	4.49	0.6	2	52.7	132	260	10.2
1849	<0.2	4.57	9	<5	1	<0.5	<1	6.52	<0.5	3	21.3	128	73.5	9.59
1850	<0.2	6.11	8	<5	1	<0.5	<1	4.06	<0.5	2	23.9	153	8.7	12.5
1851	6.7	5.18	15	<5	2	<0.5	2	6.58	<0.5	4	42.0	116	401	11.5
1852	<0.2	3.69	30	<5	2	<0.5	<1	8.26	<0.5	3	54.7	86.4	246	8.97

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
1853	0.4	2.79	18	<5	2	<0.5	<1	6.72	0.7	2	26.2	81.6	245	10.4
1854	<0.2	6.92	23	<5	2	<0.5	<1	6.20	<0.5	<1	47.3	137	231	16.1
1855	0.7	1.04	12	<5	11	<0.5	4	4.82	1.0	<1	64.9	51.7	397	14.0
1856	<0.2	1.97	29	<5	2	<0.5	6	6.31	1.1	<1	30.2	61.0	355	9.74
1857	<0.2	5.06	26	<5	5	<0.5	<1	9.76	<0.5	2	177	118	797	16.4
1858	<0.2	7.73	11	<5	<1	<0.5	<1	1.64	<0.5	2	52.7	218	112	16.0
1859	0.2	7.42	36	7	2	<0.5	5	0.96	0.6	<1	357	178	1190	19.4
1860	0.8	2.47	42	<5	<1	<0.5	<1	3.94	1.6	<1	244	90.9	1080	11.1
1861	1.4	4.58	59	<5	23	<0.5	2	0.63	<0.5	<1	485	87.7	2300	16.7
1862	<0.2	6.82	16	<5	10	<0.5	<1	1.94	<0.5	3	59.0	172	366	14.4
1863	<0.2	5.06	23	7	2	<0.5	10	7.80	1.3	5	124	117	426	13.9
1864	<0.2	3.53	31	<5	1	<0.5	<1	7.53	<0.5	<1	168	84.8	751	13.1
1865	1.0	2.10	356	<5	<1	<0.5	13	8.14	2.0	<1	325	50.6	1260	14.8
1866	7.1	1.26	120	<5	333	<0.5	1	1.18	4.9	17	13.6	32.5	1100	3.59
1867	<0.2	1.15	47	<5	23	<0.5	4	7.75	1.0	1	35.1	79.5	117	7.38
1868	4.1	0.61	332	<5	9	<0.5	19	6.84	<0.5	<1	91.0	43.0	205	13.1
1869	<0.2	0.31	86	<5	28	<0.5	4	5.15	0.8	1	31.5	41.4	14.7	7.65
1870	<0.2	0.43	73	<5	7	<0.5	3	2.74	<0.5	<1	22.8	35.8	16.5	6.42
1871	<0.2	0.86	13	15	55	<0.5	<1	8.25	<0.5	26	4.3	104	11.3	1.31
1872	<0.2	1.04	75	<5	7	<0.5	5	0.88	0.5	<1	38.1	22.6	24.5	9.44
1873	<0.2	0.64	88	<5	8	<0.5	3	0.88	<0.5	3	35.9	24.4	40.0	10.5
1874	<0.2	0.51	127	6	8	<0.5	10	1.93	0.9	<1	33.1	27.0	52.4	10.5
1875	<0.2	0.21	134	<5	4	<0.5	5	1.26	<0.5	<1	16.3	133	24.0	5.78
1876	1.8	0.24	345	<5	4	<0.5	16	1.76	<0.5	<1	38.7	133	90.1	9.40
1877	<0.2	0.51	129	<5	13	<0.5	<1	2.60	<0.5	1	48.0	37.9	16.0	7.72
1878	<0.2	0.57	125	<5	16	<0.5	2	2.33	<0.5	4	49.4	30.3	10.2	7.23
1879	<0.2	0.34	71	<5	11	<0.5	<1	2.73	<0.5	2	19.5	139	13.8	3.91
1880	<0.2	1.01	152	<5	21	<0.5	4	1.82	<0.5	6	60.0	41.9	173	7.67
1881	<0.2	0.83	149	<5	20	<0.5	5	1.85	<0.5	6	60.4	43.6	167	7.80
1882	<0.2	0.94	131	<5	10	<0.5	5	2.90	0.6	2	42.0	40.0	38.6	8.16
1883	<0.2	0.40	116	<5	6	<0.5	1	4.03	<0.5	2	37.4	17.6	28.4	6.44
1884	<0.2	0.90	99	<5	8	<0.5	2	2.03	<0.5	4	30.4	111	85.6	7.73

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
1885	7.1	1.23	125	5	308	<0.5	3	1.06	4.6	17	12.5	32.2	1010	3.34
1886	<0.2	1.05	126	<5	12	<0.5	5	1.39	<0.5	7	45.1	45.6	67.0	8.99
1887	<0.2	0.55	66	<5	8	<0.5	2	0.57	<0.5	6	20.3	73.3	4.7	8.38
1888	<0.2	0.38	246	<5	5	<0.5	9	2.75	<0.5	2	29.5	88.6	333	5.13
1889	<0.2	0.98	16	13	69	<0.5	<1	7.73	<0.5	35	4.6	150	14.3	1.28
1890	<0.2	0.82	422	<5	10	<0.5	2	5.92	<0.5	1	92.5	47.6	76.5	8.53
1891	<0.2	0.45	116	<5	6	<0.5	5	6.41	0.6	3	27.2	57.2	16.6	5.75
1892	<0.2	0.80	149	<5	8	<0.5	3	5.00	0.6	3	35.4	43.2	18.8	6.36
1893	<0.2	0.71	57	<5	8	<0.5	<1	4.82	<0.5	4	24.4	38.8	106	7.26
1894	<0.2	0.40	247	<5	10	<0.5	<1	6.36	<0.5	1	26.9	90.6	17.8	6.11
1895	<0.2	0.92	443	<5	10	<0.5	<1	5.21	<0.5	<1	38.5	116	32.8	5.75
1896	<0.2	0.73	207	<5	8	<0.5	<1	6.32	<0.5	2	39.9	78.9	57.6	5.75
1897	<0.2	0.71	176	<5	7	<0.5	<1	5.30	<0.5	2	27.3	28.4	61.9	5.17
1898	<0.2	0.51	136	<5	9	<0.5	<1	4.11	<0.5	2	25.2	96.7	11.9	3.89
1899	<0.2	0.64	193	<5	10	<0.5	<1	8.32	<0.5	3	24.2	43.8	9.8	4.01
1900	<0.2	0.62	161	<5	6	<0.5	<1	6.07	<0.5	2	30.2	45.5	23.2	5.62
1901	<0.2	0.65	1820	<5	8	<0.5	<1	7.01	0.6	3	35.7	34.7	33.5	5.78
1902	<0.2	0.81	210	<5	8	<0.5	<1	7.16	<0.5	4	48.7	34.7	9.8	5.62
1903	<0.2	0.56	130	<5	7	<0.5	4	3.12	0.7	2	25.5	74.4	71.9	7.31
1904	<0.2	0.08	28	<5	2	<0.5	<1	1.27	<0.5	<1	10.1	136	5.7	7.64
1905	0.3	0.32	102	<5	5	<0.5	<1	3.52	<0.5	1	15.8	151	12.8	3.03
1906	<0.2	0.05	12	<5	<1	<0.5	<1	0.55	<0.5	<1	1.7	279	4.0	0.61
1907	1.2	0.40	657	6	77	<0.5	3	2.01	1.5	4	6.4	20.4	69.4	2.57
1908	<0.2	0.57	109	<5	7	<0.5	<1	3.95	<0.5	2	23.7	81.7	39.8	5.18
1909	<0.2	0.76	649	<5	10	<0.5	3	5.77	0.5	2	35.6	33.1	162	7.06
1910	<0.2	0.65	227	<5	7	<0.5	<1	5.76	<0.5	3	39.3	29.9	124	6.90
1911	0.3	0.54	296	<5	7	<0.5	<1	6.01	<0.5	<1	34.5	22.6	150	7.15
1912	<0.2	0.57	352	<5	7	<0.5	<1	5.65	<0.5	2	40.2	19.1	29.0	7.02
1913	<0.2	0.55	128	<5	6	<0.5	<1	6.05	<0.5	<1	38.6	15.4	109	7.31
1914	<0.2	0.21	67	<5	3	<0.5	<1	3.07	<0.5	1	7.8	126	74.9	2.54
1915	<0.2	0.80	14	12	78	<0.5	<1	9.38	<0.5	33	3.5	128	10.6	1.29
1916	<0.2	0.47	279	<5	7	<0.5	<1	6.51	<0.5	1	21.3	20.1	6.9	6.09

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
1917	<0.2	0.31	102	<5	8	<0.5	<1	1.73	<0.5	1	6.9	167	6.3	1.89
1918	<0.2	0.55	301	<5	10	<0.5	<1	5.82	<0.5	2	23.6	97.3	20.4	5.04
1919	<0.2	0.29	105	<5	6	<0.5	<1	4.34	<0.5	2	15.9	167	9.0	3.15
1920	<0.2	0.50	168	<5	9	<0.5	<1	6.84	<0.5	1	28.9	59.2	111	5.97
1921	<0.2	0.45	110	<5	6	<0.5	<1	6.39	<0.5	2	30.2	32.9	81.7	6.26
1922	<0.2	0.48	89	<5	6	<0.5	<1	5.76	<0.5	16	21.3	33.6	45.3	4.57
1923	<0.2	0.71	13	16	57	<0.5	<1	8.79	<0.5	36	3.8	130	12.9	1.23
1924	<0.2	0.61	295	<5	8	<0.5	<1	6.39	<0.5	3	41.3	40.2	143	6.55
1925	<0.2	0.61	194	<5	7	<0.5	<1	6.08	<0.5	3	27.3	37.1	136	5.85
1926	<0.2	0.53	258	<5	14	<0.5	<1	8.12	<0.5	3	32.1	70.7	106	5.11
1927	<0.2	0.63	170	<5	15	<0.5	<1	3.39	<0.5	5	24.6	36.7	29.1	9.92
1928	<0.2	2.01	4	9	40	<0.5	9	2.46	0.9	9	73.2	67.0	338	11.9
1929	1.3	1.80	11	<5	86	<0.5	<1	5.90	<0.5	2	144	71.7	1000	12.6
1930	<0.2	5.94	24	9	12	<0.5	<1	1.64	<0.5	<1	150	159	194	17.0
1931	<0.2	5.18	13	<5	2	<0.5	<1	3.99	<0.5	1	40.3	162	183	13.4
1932	<0.2	4.40	21	5	2	<0.5	<1	2.17	<0.5	1	101	177	584	12.3
1933	7.4	1.33	129	<5	317	<0.5	1	1.26	5.0	20	13.1	36.0	1180	3.92
1934	<0.2	4.36	13	9	1	<0.5	3	2.94	<0.5	1	40.1	168	301	11.0
1935	<0.2	5.14	12	<5	2	<0.5	<1	3.98	<0.5	<1	31.4	165	380	12.6
1936	<0.2	5.29	8	<5	2	<0.5	11	2.54	0.8	2	54.1	166	127	13.6
1937	0.5	4.83	9	<5	2	<0.5	<1	3.97	<0.5	7	192	124	680	16.0
1938	2.7	3.74	39	6	2	<0.5	<1	3.12	<0.5	4	289	125	966	14.9
1939	<0.2	5.27	10	<5	1	<0.5	<1	4.93	<0.5	10	32.3	67.0	171	12.1
1940	<0.2	3.24	13	<5	<1	0.9	<1	3.77	<0.5	26	60.8	30.7	269	9.60
1941	<0.2	1.75	6	<5	<1	<0.5	<1	0.07	<0.5	38	14.2	51.9	37.2	3.99
1942	<0.2	3.02	5	<5	<1	<0.5	3	0.02	<0.5	21	87.7	48.3	342	10.3
1943	1.0	3.91	15	<5	<1	<0.5	<1	0.07	1.0	25	137	48.0	1030	13.7
1944	0.6	3.42	34	<5	1	<0.5	1	4.36	<0.5	8	107	66.0	1140	10.1
1945	<0.2	0.76	12	14	78	<0.5	<1	8.65	<0.5	38	3.6	150	12.0	1.25
1946	<0.2	1.71	21	<5	2	0.6	<1	15.2	<0.5	22	15.7	64.4	213	3.27
1947	<0.2	1.08	27	<5	74	<0.5	<1	1.02	<0.5	11	28.5	32.2	28.6	1.55
1948	<0.2	1.44	7	<5	59	<0.5	2	0.35	<0.5	15	13.0	51.8	73.3	2.75

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
1949	<0.2	1.35	8	<5	20	<0.5	3	1.59	<0.5	11	50.1	73.8	324	6.58
1950	1.4	0.33	628	7	96	<0.5	3	2.11	1.7	5	6.7	20.8	74.1	2.71
1951	<0.2	1.30	7	<5	50	<0.5	<1	0.66	<0.5	25	6.8	31.6	34.2	2.50
1952	<0.2	1.35	4	<5	28	<0.5	5	0.29	<0.5	8	84.8	98.4	525	9.46
1953	<0.2	0.99	6	<5	28	<0.5	3	0.74	<0.5	5	85.8	165	508	8.58
1954	<0.2	1.44	6	<5	31	<0.5	<1	1.35	<0.5	27	21.8	94.8	142	6.38
1955	<0.2	0.63	7	<5	<1	<0.5	<1	2.67	<0.5	3	6.9	113	42.2	6.45
1956	<0.2	1.12	3	<5	41	<0.5	3	0.33	<0.5	9	67.2	135	512	11.2
1957	<0.2	3.70	8	<5	45	<0.5	<1	1.93	<0.5	9	61.2	111	314	12.9
1958	<0.2	2.22	4	<5	28	<0.5	<1	1.27	<0.5	5	43.6	88.6	273	17.7
1959	<0.2	0.07	7	<5	5	<0.5	6	2.11	0.7	<1	15.3	103	140	12.0
1960	<0.2	0.15	10	<5	2	<0.5	<1	5.45	<0.5	6	5.7	142	42.8	9.07
1961	0.5	1.57	5	<5	2	<0.5	5	2.37	<0.5	19	98.5	74.9	565	16.3
1962	<0.2	1.16	6	<5	10	<0.5	4	2.28	<0.5	<1	94.3	87.6	420	13.5
1963	<0.2	3.10	6	13	14	<0.5	<1	1.08	<0.5	1	76.7	63.5	286	18.2
1964	<0.2	0.18	5	<5	1	<0.5	<1	3.23	<0.5	<1	56.0	68.5	418	13.0
1965	0.2	3.97	4	9	2	<0.5	<1	1.03	<0.5	1	124	81.4	695	22.7
1966	1.7	4.45	55	27	<1	<0.5	9	0.42	<0.5	8	189	45.6	2000	23.6
1967	0.9	0.44	90	<5	4	<0.5	7	1.92	2.9	<1	235	110	902	12.9
1968	<0.2	3.12	14	<5	1	<0.5	<1	4.93	<0.5	3	43.1	180	181	7.41
1969	<0.2	3.61	12	<5	<1	<0.5	<1	2.49	<0.5	<1	40.5	220	72.5	9.10
1970	<0.2	4.17	13	9	2	<0.5	<1	3.94	<0.5	<1	77.0	191	270	12.4
1971	<0.2	3.62	12	<5	2	<0.5	<1	4.04	<0.5	<1	38.1	229	72.6	9.94
1972	<0.2	1.56	70	<5	16	<0.5	<1	4.77	<0.5	4	26.7	46.5	25.0	8.52
1973	1.4	0.79	486	6	17	<0.5	9	5.70	<0.5	1	34.8	46.0	80.9	10.1
1974	0.9	0.70	261	<5	14	<0.5	3	7.76	<0.5	2	32.1	28.7	55.1	7.87
1975	<0.2	0.66	13	10	49	<0.5	<1	8.43	<0.5	30	3.3	158	11.4	1.10
1976	<0.2	0.58	255	6	8	<0.5	4	3.93	<0.5	3	28.1	13.6	57.0	9.36
1977	<0.2	0.48	74	<5	7	<0.5	<1	4.19	<0.5	1	27.6	40.3	64.7	11.5
1978	<0.2	0.67	98	<5	10	<0.5	<1	0.83	<0.5	2	46.7	46.4	30.4	9.28
1979	<0.2	0.64	199	6	11	<0.5	2	6.79	<0.5	4	41.8	28.2	14.3	7.70
1980	7.7	1.27	122	5	345	<0.5	<1	1.18	4.7	20	12.4	34.5	1150	3.79

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
1981	1.1	0.52	349	5	9	<0.5	11	6.25	<0.5	2	41.8	51.5	17.9	10.9
1982	1.4	0.69	437	9	12	<0.5	10	6.91	<0.5	1	45.7	34.5	23.0	12.4
1983	<0.2	0.52	244	<5	9	<0.5	<1	8.08	<0.5	3	34.1	51.9	5.8	7.17
1984	<0.2	0.27	79	6	6	<0.5	<1	8.19	<0.5	3	16.8	93.3	3.2	4.57
1985	<0.2	0.47	426	5	7	<0.5	<1	6.99	<0.5	2	44.6	50.5	13.7	6.45
1986	<0.2	0.49	250	<5	8	<0.5	<1	8.50	<0.5	4	30.5	80.3	7.4	5.75
1987	<0.2	0.63	248	7	12	<0.5	2	6.90	0.5	2	33.4	36.5	37.9	6.10
1988	<0.2	0.83	191	5	15	<0.5	<1	8.60	<0.5	4	36.8	23.9	23.8	6.35
1989	<0.2	0.74	204	5	13	<0.5	<1	6.14	<0.5	2	35.7	44.4	85.9	6.83
1990	<0.2	0.62	12	10	77	<0.5	<1	8.85	<0.5	37	3.3	149	12.4	1.11
1991	<0.2	0.70	224	6	13	<0.5	<1	6.66	<0.5	2	39.3	38.0	159	6.08
1992	<0.2	0.61	370	9	10	<0.5	<1	9.69	<0.5	4	35.2	28.1	181	5.94
1993	<0.2	0.97	778	6	15	<0.5	<1	6.72	<0.5	3	47.4	24.5	97.0	7.77
1994	1.4	0.41	620	10	144	<0.5	2	2.11	1.6	5	6.6	22.5	75.3	2.69
1995	<0.2	0.53	58	<5	8	<0.5	<1	3.98	<0.5	6	14.7	92.7	18.3	4.48
1996	<0.2	0.33	630	<5	6	<0.5	<1	3.40	<0.5	3	23.8	195	24.8	4.08
1997	<0.2	0.50	8100	<5	12	<0.5	<1	6.64	<0.5	4	16.0	80.5	22.5	4.41
1998	0.5	0.57	207	<5	10	<0.5	<1	3.05	<0.5	11	24.4	103	411	4.66

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
1760	5	<1	1	0.05	<1	1	3.94	1510	<0.5	0.12	74.7	225	0.9	<10
1761	9	<1	<1	0.02	<1	30	8.53	1350	<0.5	0.03	366	94	5.6	<10
1762	10	<1	<1	0.03	<1	29	7.88	1480	<0.5	0.03	340	122	4.4	<10
1763	8	<1	<1	0.02	<1	41	10.0	1320	<0.5	0.03	399	86	7.4	<10
1764	<5	<1	<1	0.03	<1	3	3.85	1450	<0.5	0.10	64.2	149	1.1	<10
1765	<5	<1	<1	0.03	<1	3	4.01	1420	<0.5	0.10	76.4	148	1.3	<10
1766	<5	<1	<1	0.03	<1	2	3.78	1500	1.0	0.11	66.1	167	0.8	<10
1767	11	<1	<1	<0.01	13	9	1.78	404	2.8	0.06	9.8	63	4.5	<10
1768	33	<1	2	<0.01	10	2	4.59	1560	<0.5	<0.01	31.8	299	15.4	<10
1769	<5	<1	<1	0.06	2	2	4.89	1890	1.2	0.12	38.3	266	0.6	<10
1770	6	<1	<1	0.04	3	3	5.26	1920	2.7	0.10	48.2	355	4.3	<10
1771	5	<1	<1	0.03	1	1	4.01	1930	0.7	0.11	34.0	330	1.5	<10
1801	13	<1	<1	0.01	<1	18	2.71	1650	1.5	0.03	121	180	6.2	<10
1802	9	<1	<1	0.06	3	15	1.97	1650	1.8	0.02	84.9	246	5.9	11
1803	10	<1	<1	0.12	<1	21	2.72	2090	1.4	0.02	123	163	6.5	15
1804	10	<1	<1	0.12	<1	15	2.07	2090	1.3	0.02	130	185	4.1	16
1805	<5	<1	<1	0.18	6	6	0.84	706	1.1	<0.01	13.6	263	1.9	12
1806	<5	<1	<1	0.23	6	6	0.84	719	1.2	<0.01	12.4	290	2.5	13
1807	<5	<1	<1	0.24	12	13	3.31	472	1.5	0.02	7.0	408	1.9	32
1808	<5	<1	<1	0.18	7	5	0.64	483	1.2	<0.01	14.3	383	1.8	<10
1809	<5	<1	<1	0.20	7	7	0.85	607	1.4	<0.01	28.9	424	3.1	10
1810	<5	<1	3	0.24	9	5	0.46	261	2.0	<0.01	57.8	377	10.6	<10
1811	<5	<1	<1	0.26	7	9	0.90	320	3.1	0.01	38.8	497	8.9	<10
1812	9	<1	<1	0.02	4	9	1.20	1010	1.1	0.06	37.0	377	8.1	<10
1813	6	<1	<1	0.16	9	11	0.79	503	74.6	0.10	64.1	588	314	15
1814	12	<1	3	0.01	5	8	1.44	1030	1.2	0.04	75.7	302	6.3	<10
1815	17	<1	<1	<0.01	4	11	2.56	1690	1.1	0.04	98.3	240	8.2	<10
1816	6	<1	<1	0.16	7	5	0.87	529	1.8	0.03	62.1	266	5.4	<10
1817	11	<1	<1	<0.01	2	7	2.20	1400	<0.5	<0.01	66.0	228	8.5	<10
1818	8	<1	<1	<0.01	<1	6	1.72	2430	1.3	0.03	143	168	3.8	11
1819	8	<1	<1	<0.01	<1	7	2.29	2380	1.0	0.02	205	167	7.5	<10
1820	<5	<1	<1	<0.01	<1	3	1.06	1260	<0.5	<0.01	128	173	4.6	<10

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
1821	7	<1	<1	<0.01	<1	8	2.18	1800	<0.5	0.03	105	144	5.9	<10
1822	16	<1	<1	<0.01	<1	22	5.27	2260	<0.5	<0.01	92.8	174	8.6	<10
1823	21	<1	<1	<0.01	<1	21	6.01	1860	1.1	<0.01	54.7	447	12.5	<10
1824	<5	<1	<1	0.24	11	9	1.42	488	1.2	<0.01	4.2	58	3.5	10
1825	<5	4	2	0.22	2	2	0.92	387	30.8	<0.01	79.2	883	20.0	33
1826	7	<1	<1	0.01	8	9	1.31	1060	1.2	0.06	19.9	223	3.3	<10
1827	6	<1	<1	0.09	6	7	1.36	1050	1.0	0.05	14.6	369	1.9	<10
1828	<5	<1	<1	0.16	6	2	0.57	646	1.1	0.02	8.7	517	<0.5	10
1829	6	<1	<1	0.05	1	7	2.13	1590	1.8	0.05	57.3	336	3.2	<10
1830	5	<1	<1	0.11	2	6	0.88	808	2.4	0.02	47.8	271	7.6	<10
1831	<5	<1	<1	0.04	2	<1	0.99	2350	0.6	0.02	5.9	106	<0.5	<10
1832	7	<1	<1	0.13	3	4	1.54	1840	1.6	<0.01	22.6	269	6.3	10
1833	5	<1	<1	0.31	13	22	4.00	607	1.6	0.04	9.6	639	1.2	42
1834	<5	<1	2	0.05	1	<1	0.35	1570	0.8	0.02	5.8	249	<0.5	<10
1835	<5	<1	<1	0.04	1	2	0.67	909	1.7	0.02	15.8	394	3.9	<10
1836	<5	<1	<1	<0.01	<1	2	0.29	261	1.4	0.02	7.3	95	5.6	<10
1837	7	<1	<1	<0.01	<1	7	1.79	1060	1.0	0.03	27.4	276	7.8	<10
1838	6	<1	<1	0.12	<1	16	3.75	1510	1.1	0.06	99.0	290	4.2	12
1839	11	<1	<1	0.19	1	25	4.42	1560	1.6	0.06	101	238	6.6	15
1840	<5	<1	<1	0.13	6	10	1.72	1280	1.5	<0.01	3.1	94	3.1	13
1841	<5	<1	<1	0.23	15	6	0.99	338	0.6	0.02	4.3	158	1.3	<10
1842	<5	<1	2	0.27	12	9	1.82	910	1.3	0.02	40.1	153	3.5	15
1843	<5	<1	<1	0.29	12	19	4.75	558	1.5	0.03	6.9	380	2.6	34
1844	14	<1	<1	0.03	1	17	2.83	2060	<0.5	0.03	71.7	192	9.1	<10
1845	19	<1	<1	<0.01	<1	10	2.82	2530	<0.5	<0.01	74.7	178	10.6	<10
1846	<5	4	<1	0.21	2	2	0.95	354	26.3	<0.01	70.2	870	18.8	26
1847	12	<1	<1	<0.01	2	12	2.50	2770	1.4	<0.01	96.8	237	8.7	<10
1848	13	<1	<1	<0.01	<1	15	2.58	2160	<0.5	0.01	74.9	198	8.5	<10
1849	14	<1	<1	<0.01	<1	16	2.39	2310	0.8	0.02	36.5	317	9.1	<10
1850	16	<1	<1	<0.01	<1	22	3.21	2080	2.3	0.02	47.4	283	11.1	<10
1851	12	<1	<1	<0.01	1	17	2.69	2230	1.4	<0.01	76.3	304	11.2	<10
1852	10	<1	<1	<0.01	<1	9	1.77	2380	1.3	<0.01	52.4	253	8.1	<10

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
1853	11	<1	<1	<0.01	<1	4	2.05	2750	2.0	<0.01	29.2	298	5.7	<10
1854	15	1	<1	<0.01	<1	7	3.40	2040	2.0	<0.01	36.5	253	14.0	<10
1855	7	<1	<1	<0.01	<1	<1	1.65	2280	1.6	<0.01	27.3	354	44.5	<10
1856	11	<1	2	<0.01	1	4	2.05	2730	1.8	<0.01	23.8	203	6.3	<10
1857	14	<1	<1	0.01	<1	29	4.28	4090	1.9	<0.01	71.6	162	9.8	<10
1858	13	<1	<1	<0.01	1	48	3.97	872	2.4	0.03	93.1	259	15.0	<10
1859	23	<1	<1	<0.01	2	46	3.91	845	<0.5	<0.01	131	183	16.1	<10
1860	12	<1	<1	<0.01	<1	13	2.02	1970	<0.5	<0.01	55.8	129	28.6	<10
1861	12	1	<1	0.05	3	31	1.90	651	2.8	<0.01	81.4	200	15.6	<10
1862	18	<1	<1	0.02	2	38	3.21	939	<0.5	0.01	65.6	240	14.4	<10
1863	22	<1	3	<0.01	3	21	3.40	3380	<0.5	<0.01	64.8	64	11.9	<10
1864	14	<1	<1	<0.01	<1	9	3.13	3630	0.7	<0.01	69.6	94	8.4	<10
1865	10	<1	<1	<0.01	<1	4	3.33	2540	0.7	<0.01	110	75	8.8	<10
1866	5	<1	4	0.12	8	9	0.66	499	72.2	0.07	65.1	589	316	13
1867	9	<1	<1	0.06	<1	4	2.10	2270	0.5	0.03	38.2	118	4.9	<10
1868	5	<1	<1	0.05	<1	2	2.42	1490	1.2	0.10	107	210	3.5	<10
1869	6	<1	4	0.10	<1	1	3.03	2030	<0.5	0.06	54.3	177	2.9	<10
1870	<5	<1	3	0.06	<1	1	4.37	1670	1.3	0.09	31.5	215	2.1	<10
1871	5	<1	<1	0.25	10	24	3.85	443	1.3	0.03	9.5	415	2.1	36
1872	9	<1	<1	0.06	<1	8	6.42	2060	<0.5	0.11	29.9	266	4.1	<10
1873	7	<1	<1	0.08	2	3	6.86	2500	1.1	0.13	34.6	319	3.4	<10
1874	7	<1	<1	0.08	<1	2	6.45	2680	1.7	0.11	35.9	303	4.6	<10
1875	<5	<1	<1	0.04	<1	<1	2.63	1180	0.5	0.05	20.3	162	1.8	<10
1876	<5	<1	<1	0.03	<1	1	1.96	855	1.4	0.06	46.2	102	12.4	<10
1877	7	<1	<1	0.08	<1	1	5.07	2120	0.7	0.13	58.4	361	1.0	<10
1878	6	<1	<1	0.10	1	1	4.58	2040	<0.5	0.14	45.5	396	1.2	<10
1879	<5	<1	<1	0.06	<1	<1	2.34	1080	0.8	0.09	28.7	210	<0.5	<10
1880	7	<1	<1	0.13	3	2	4.07	1640	<0.5	0.25	58.3	358	3.3	<10
1881	7	<1	2	0.11	3	2	4.26	1730	<0.5	0.21	58.3	363	2.8	<10
1882	8	<1	<1	0.08	1	4	6.09	2250	0.6	0.20	42.7	378	3.7	<10
1883	6	<1	<1	0.04	1	2	4.74	2230	<0.5	0.09	39.2	290	1.7	<10
1884	5	<1	<1	0.09	2	2	4.96	1640	2.6	0.19	40.4	357	2.2	<10

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
1885	7	<1	<1	0.13	8	8	0.62	400	77.1	0.08	62.9	555	307	14
1886	8	<1	<1	0.10	2	3	5.71	1830	<0.5	0.24	45.7	484	3.0	<10
1887	6	<1	3	0.07	2	1	5.15	2100	<0.5	0.14	32.1	458	1.5	<10
1888	<5	<1	<1	0.04	1	<1	1.65	731	0.6	0.11	40.4	292	2.2	<10
1889	<5	<1	<1	0.35	14	18	3.46	442	2.0	0.08	8.9	464	2.8	38
1890	7	<1	<1	0.08	<1	2	4.59	1910	1.2	0.24	228	211	3.0	10
1891	<5	<1	2	0.06	<1	1	3.63	1380	<0.5	0.13	65.2	136	3.2	<10
1892	6	<1	<1	0.08	1	2	3.57	1330	<0.5	0.21	75.0	187	1.4	10
1893	6	<1	<1	0.06	2	2	3.02	1470	<0.5	0.21	34.7	392	2.2	<10
1894	5	<1	<1	0.07	<1	1	5.54	2170	0.7	0.10	134	88	2.0	<10
1895	6	<1	<1	0.08	<1	6	6.60	1570	<0.5	0.12	245	99	1.5	10
1896	<5	<1	<1	0.06	<1	3	4.08	1300	1.1	0.17	98.8	144	1.0	<10
1897	5	<1	<1	0.07	<1	2	3.26	1250	0.6	0.19	57.4	141	0.9	<10
1898	<5	<1	<1	0.08	<1	1	2.76	1060	0.5	0.14	60.5	111	0.6	<10
1899	<5	<1	2	0.08	<1	1	3.94	1610	1.7	0.18	81.7	147	1.3	12
1900	5	<1	<1	0.06	<1	2	3.93	1470	0.5	0.17	70.1	164	1.5	<10
1901	<5	<1	<1	0.06	<1	2	4.05	1750	1.9	0.18	81.5	189	1.8	10
1902	5	<1	<1	0.08	<1	2	3.78	1640	<0.5	0.23	76.6	249	1.5	11
1903	5	<1	<1	0.06	<1	1	3.66	1510	1.2	0.16	65.5	208	2.5	<10
1904	<5	<1	<1	<0.01	<1	<1	3.44	1340	0.7	0.03	50.8	26	<0.5	<10
1905	<5	<1	<1	0.04	<1	<1	1.96	828	1.5	0.09	33.0	122	0.8	<10
1906	<5	<1	<1	<0.01	<1	<1	0.26	115	0.7	0.02	5.5	21	<0.5	<10
1907	<5	3	<1	0.22	2	2	0.86	286	26.3	<0.01	65.2	771	16.7	29
1908	<5	<1	<1	0.05	<1	1	2.57	1160	1.2	0.17	39.5	152	0.5	<10
1909	6	<1	<1	0.07	1	2	3.19	1480	<0.5	0.22	46.4	202	2.5	<10
1910	6	<1	<1	0.05	<1	2	3.15	1480	0.8	0.18	47.9	195	2.0	<10
1911	<5	<1	<1	0.05	<1	2	3.39	1660	<0.5	0.15	39.8	212	0.6	<10
1912	5	<1	<1	0.05	1	1	3.53	1590	<0.5	0.16	50.2	190	0.5	<10
1913	<5	<1	<1	0.05	<1	2	3.46	1590	<0.5	0.16	46.9	191	<0.5	<10
1914	<5	<1	<1	0.02	<1	<1	1.25	610	0.9	0.07	15.8	70	<0.5	<10
1915	5	<1	<1	0.31	12	19	4.07	555	1.4	0.04	7.8	504	1.1	44
1916	<5	<1	<1	0.04	<1	1	3.45	1420	<0.5	0.15	38.5	135	<0.5	<10

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
1917	<5	<1	<1	0.04	<1	<1	0.82	415	0.7	0.09	13.9	136	<0.5	<10
1918	<5	<1	2	0.07	<1	1	3.05	1430	<0.5	0.16	54.4	207	<0.5	10
1919	<5	<1	<1	0.04	<1	<1	2.12	1110	0.8	0.09	30.9	141	<0.5	<10
1920	5	<1	<1	0.05	<1	2	3.55	1530	<0.5	0.14	45.4	194	1.3	<10
1921	<5	<1	<1	0.04	<1	1	3.55	1530	<0.5	0.14	71.6	180	<0.5	<10
1922	<5	<1	3	0.04	5	1	2.68	1120	<0.5	0.15	63.4	811	<0.5	<10
1923	<5	<1	2	0.29	13	17	3.86	509	1.2	0.04	6.7	612	<0.5	40
1924	<5	<1	<1	0.05	1	2	3.43	1520	<0.5	0.18	54.7	233	<0.5	<10
1925	5	<1	<1	0.05	1	2	3.55	1370	1.3	0.19	60.7	143	0.6	<10
1926	5	<1	<1	0.07	<1	2	4.78	1560	1.8	0.14	116	124	<0.5	11
1927	8	<1	<1	0.07	3	3	5.27	2190	<0.5	0.13	22.3	488	1.3	<10
1928	15	<1	<1	0.37	2	1	2.07	1880	<0.5	0.17	71.9	104	4.1	33
1929	9	<1	<1	0.27	1	<1	1.67	1680	1.3	0.10	227	256	<0.5	23
1930	23	<1	<1	0.01	1	5	3.88	1790	<0.5	<0.01	144	187	10.3	<10
1931	18	<1	<1	<0.01	<1	7	3.02	1870	<0.5	0.01	54.1	197	10.8	<10
1932	18	<1	<1	<0.01	<1	8	2.50	1530	<0.5	0.03	93.0	243	7.9	<10
1933	5	<1	<1	0.14	10	8	0.63	552	83.5	0.08	69.6	643	348	16
1934	25	<1	2	<0.01	2	7	2.54	1690	<0.5	0.02	81.6	268	7.7	<10
1935	21	<1	<1	<0.01	<1	9	3.03	1810	<0.5	0.01	89.0	230	8.7	<10
1936	20	<1	<1	<0.01	1	7	2.84	1600	<0.5	0.01	74.0	277	9.9	<10
1937	18	1	<1	<0.01	3	4	2.62	1610	0.5	<0.01	110	243	9.6	<10
1938	17	<1	<1	<0.01	3	5	2.53	1240	0.6	0.02	210	297	121	<10
1939	18	<1	<1	<0.01	4	5	4.23	1660	7.6	<0.01	31.0	178	10.3	<10
1940	15	<1	<1	<0.01	11	4	2.37	1150	1.7	0.02	58.6	84	6.8	<10
1941	11	<1	<1	<0.01	16	5	1.24	316	<0.5	0.07	8.6	43	3.0	<10
1942	14	<1	<1	<0.01	10	6	2.14	490	1.8	0.03	48.9	43	6.3	<10
1943	13	1	<1	<0.01	13	7	2.81	732	1.8	<0.01	64.7	40	9.0	<10
1944	16	<1	<1	<0.01	4	8	2.52	1340	7.0	0.01	59.9	126	5.7	<10
1945	<5	<1	2	0.28	14	18	3.82	549	1.5	0.04	7.7	496	1.0	41
1946	9	<1	<1	<0.01	8	7	1.58	2610	1.1	<0.01	13.5	55	2.3	<10
1947	<5	<1	<1	0.43	4	2	0.33	280	3.0	0.01	7.7	391	0.9	17
1948	<5	<1	<1	0.37	6	3	0.57	202	1.0	<0.01	11.8	438	1.1	13

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
1949	8	<1	<1	0.15	5	3	0.88	610	0.7	<0.01	20.7	131	2.2	<10
1950	<5	4	2	0.19	2	2	0.89	357	27.4	<0.01	69.9	894	18.1	25
1951	6	<1	1	0.30	10	3	0.63	371	3.7	<0.01	2.6	152	1.8	12
1952	6	<1	<1	0.20	4	6	0.81	185	3.2	<0.01	39.5	230	3.2	<10
1953	6	<1	<1	0.20	3	4	0.73	351	0.8	<0.01	46.3	186	2.4	<10
1954	7	<1	<1	0.21	11	4	0.91	842	3.8	<0.01	9.7	95	2.0	<10
1955	<5	<1	<1	<0.01	1	<1	0.70	1330	0.6	<0.01	3.4	68	<0.5	<10
1956	7	<1	<1	0.23	4	4	0.56	268	1.6	<0.01	86.3	222	2.0	<10
1957	11	<1	<1	0.25	4	15	2.26	923	<0.5	<0.01	86.1	279	4.9	14
1958	10	<1	<1	0.16	4	9	1.76	1260	0.5	0.01	47.5	404	2.2	<10
1959	6	<1	<1	0.02	<1	<1	0.65	1850	1.1	<0.01	17.2	364	2.1	<10
1960	<5	<1	<1	0.02	2	<1	1.18	3430	2.8	<0.01	4.6	136	<0.5	<10
1961	11	<1	<1	<0.01	11	1	1.03	1160	1.2	<0.01	70.5	138	30.2	<10
1962	9	<1	<1	0.03	<1	1	1.07	1440	<0.5	<0.01	30.4	301	2.8	<10
1963	17	<1	<1	0.04	1	4	1.57	1640	<0.5	<0.01	77.8	261	7.2	<10
1964	6	<1	<1	0.01	<1	<1	0.34	898	1.9	<0.01	24.8	435	<0.5	<10
1965	21	<1	<1	<0.01	1	<1	3.62	1000	1.1	<0.01	64.1	130	4.9	<10
1966	30	1	<1	<0.01	5	1	3.02	1150	<0.5	<0.01	16.5	599	9.0	<10
1967	6	<1	<1	<0.01	<1	<1	0.52	542	1.6	<0.01	50.5	122	5.5	<10
1968	10	<1	<1	<0.01	<1	13	2.92	1840	<0.5	0.04	68.6	334	4.0	<10
1969	11	<1	<1	<0.01	<1	16	3.54	1950	<0.5	0.03	83.0	233	5.9	<10
1970	15	<1	<1	<0.01	<1	21	4.00	2280	<0.5	0.01	88.5	199	7.8	<10
1971	13	<1	<1	<0.01	<1	18	3.49	2210	0.7	0.03	81.1	263	7.0	<10
1972	8	<1	<1	0.07	1	11	2.50	1940	1.1	0.11	23.4	365	2.6	<10
1973	8	<1	<1	0.13	<1	2	2.57	1650	<0.5	0.20	37.2	537	3.7	13
1974	6	<1	<1	0.08	<1	3	3.68	2060	<0.5	0.20	26.1	543	4.7	12
1975	<5	<1	2	0.23	11	17	3.38	551	1.6	0.03	7.5	544	0.7	34
1976	6	<1	<1	0.04	1	2	3.66	2340	<0.5	0.18	27.9	421	2.7	<10
1977	5	<1	<1	0.05	<1	2	3.72	2390	<0.5	0.13	18.3	289	1.0	<10
1978	5	<1	<1	0.07	1	2	5.27	2160	<0.5	0.17	42.7	256	2.1	<10
1979	6	<1	<1	0.06	<1	1	3.58	2040	<0.5	0.19	36.6	510	2.8	<10
1980	6	<1	<1	0.13	9	9	0.67	533	76.5	0.08	67.7	615	343	15

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
1981	7	<1	<1	0.06	<1	1	3.79	1800	0.7	0.15	58.5	378	2.8	<10
1982	8	<1	<1	0.09	<1	2	4.07	1940	<0.5	0.19	89.1	362	2.0	12
1983	6	<1	<1	0.08	<1	1	5.86	2590	<0.5	0.14	133	183	1.0	12
1984	<5	<1	1	0.05	<1	<1	4.93	2060	<0.5	0.08	40.5	145	0.8	10
1985	6	<1	<1	0.07	<1	2	6.10	2080	<0.5	0.11	225	123	1.2	11
1986	6	<1	<1	0.09	<1	1	5.80	2390	<0.5	0.12	130	128	0.9	14
1987	7	<1	<1	0.08	<1	3	4.80	2270	<0.5	0.15	120	224	2.5	12
1988	6	<1	<1	0.09	<1	3	4.78	2230	<0.5	0.23	75.4	286	1.7	13
1989	6	<1	<1	0.08	<1	2	3.90	1880	<0.5	0.22	69.1	269	2.0	10
1990	<5	<1	<1	0.20	14	14	3.53	552	1.2	0.04	7.5	1010	1.7	30
1991	6	<1	<1	0.07	<1	2	3.82	1630	0.7	0.19	80.2	235	2.3	11
1992	7	<1	<1	0.06	<1	3	4.55	1880	<0.5	0.16	116	220	1.0	12
1993	7	<1	<1	0.08	<1	4	4.35	1700	<0.5	0.24	94.8	212	2.9	11
1994	<5	4	<1	0.22	2	2	0.88	350	26.2	<0.01	69.4	809	16.8	36
1995	<5	<1	3	0.03	2	3	1.82	1090	<0.5	0.14	24.1	321	<0.5	<10
1996	<5	<1	<1	0.03	<1	1	1.63	999	0.9	0.10	40.9	148	0.8	<10
1997	<5	<1	<1	0.06	<1	2	2.69	1280	<0.5	0.14	18.8	196	0.7	11
1998	<5	<1	<1	0.04	5	3	2.08	773	<0.5	0.14	50.8	252	1.2	<10

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
1760	0.721	5	17.2	<10	<5	12.2	<10	<10	<5	<0.01	8	<5	24.9	<1
1761	0.090	5	17.0	<10	<5	20.8	<10	<10	<5	<0.01	7	<5	76.4	<1
1762	0.089	6	18.2	<10	<5	18.3	<10	<10	<5	<0.01	8	<5	83.3	<1
1763	0.103	3	16.5	<10	<5	22.8	<10	<10	<5	<0.01	6	<5	81.7	<1
1764	0.097	6	16.1	<10	<5	22.1	<10	<10	<5	<0.01	<5	<5	27.3	<1
1765	0.121	6	16.9	<10	<5	16.5	<10	<10	<5	<0.01	7	<5	31.3	<1
1766	0.360	6	18.7	<10	<5	16.7	<10	<10	<5	<0.01	<5	<5	30.8	<1
1767	0.087	3	11.1	<10	<5	11.6	<10	<10	<5	<0.01	7	<5	23.8	<1
1768	1.74	1	42.1	<10	<5	<0.5	<10	<10	<5	0.04	5	9	244	<1
1769	0.061	2	21.0	<10	<5	3.1	<10	<10	<5	<0.01	6	<5	49.1	<1
1770	0.285	4	25.1	19	<5	5.1	<10	<10	<5	<0.01	9	<5	53.8	<1
1771	0.338	4	22.4	<10	<5	11.8	<10	<10	<5	<0.01	7	<5	41.8	<1
1801	0.167	5	28.2	<10	<5	17.7	<10	<10	<5	0.20	11	<5	208	<1
1802	1.46	6	11.4	<10	<5	25.1	<10	<10	<5	0.09	7	<5	81.0	2
1803	0.204	6	11.2	<10	<5	26.8	<10	<10	<5	0.20	10	<5	105	<1
1804	0.319	7	9.1	<10	<5	25.8	<10	<10	<5	0.15	8	<5	91.7	<1
1805	0.238	5	3.4	<10	<5	7.3	<10	<10	<5	0.06	8	<5	17.9	<1
1806	0.650	5	3.7	<10	<5	8.1	<10	<10	<5	0.05	9	<5	14.9	<1
1807	0.118	7	3.5	<10	<5	84.0	<10	<10	<5	0.05	6	<5	27.4	<1
1808	0.757	4	2.3	<10	<5	6.2	<10	<10	<5	0.03	8	<5	8.1	<1
1809	1.36	4	2.5	<10	<5	6.1	<10	<10	<5	0.04	9	<5	13.3	<1
1810	5.51	2	5.3	<10	<5	4.3	<10	<10	<5	0.04	8	<5	11.4	<1
1811	7.97	<1	5.5	<10	<5	2.1	<10	<10	<5	0.08	<5	<5	20.5	<1
1812	5.83	5	9.1	<10	<5	8.0	<10	<10	<5	0.09	11	<5	85.1	<1
1813	0.660	13	6.5	<10	<5	67.6	<10	<10	<5	0.13	11	<5	82.3	26
1814	2.38	<1	16.5	<10	<5	3.6	<10	<10	<5	0.14	11	<5	107	<1
1815	1.78	<1	30.0	<10	<5	2.4	<10	<10	<5	0.19	12	<5	219	<1
1816	3.61	<1	8.0	<10	<5	1.0	<10	<10	<5	0.08	<5	<5	37.8	<1
1817	5.35	4	6.6	<10	<5	6.0	<10	<10	<5	0.09	10	<5	70.8	<1
1818	0.386	7	5.3	<10	<5	25.1	<10	<10	<5	0.21	10	<5	98.0	<1
1819	0.858	3	5.9	<10	<5	21.8	<10	<10	<5	0.22	11	<5	118	<1
1820	0.430	6	7.3	<10	<5	21.6	<10	<10	<5	0.18	10	<5	75.2	<1

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
1821	0.302	4	13.1	<10	<5	18.9	<10	<10	<5	0.20	10	<5	128	<1
1822	0.112	6	17.8	<10	<5	12.1	<10	<10	<5	0.16	13	<5	178	<1
1823	0.138	4	32.0	<10	<5	5.2	<10	<10	<5	0.36	16	5	305	<1
1824	0.019	2	5.5	<10	<5	3.8	<10	<10	<5	0.02	7	<5	15.5	<1
1825	1.88	16	4.9	<10	<5	33.9	<10	<10	<5	<0.01	10	<5	84.8	<1
1826	0.089	6	14.0	<10	<5	41.2	<10	<10	<5	0.02	5	<5	68.6	<1
1827	0.238	3	5.0	<10	<5	16.9	<10	<10	<5	<0.01	7	<5	22.1	<1
1828	0.157	6	2.6	<10	<5	11.2	<10	<10	<5	<0.01	9	<5	9.7	<1
1829	2.47	6	11.3	<10	<5	32.0	<10	<10	<5	<0.01	8	<5	72.8	<1
1830	8.20	2	5.3	<10	<5	15.8	<10	<10	<5	<0.01	9	<5	17.8	<1
1831	1.44	5	0.7	<10	<5	26.7	<10	<10	<5	<0.01	6	<5	8.1	<1
1832	4.36	3	5.4	<10	<5	19.1	<10	<10	<5	<0.01	9	<5	23.8	<1
1833	0.150	9	4.0	<10	<5	83.1	<10	<10	<5	0.07	8	<5	36.0	<1
1834	0.677	7	1.5	<10	<5	13.8	<10	<10	<5	<0.01	6	<5	13.5	<1
1835	2.83	5	2.3	<10	<5	4.9	<10	<10	<5	0.02	10	<5	29.5	<1
1836	0.020	4	2.4	<10	<5	7.2	<10	<10	<5	0.13	8	<5	31.2	<1
1837	0.256	5	6.8	<10	<5	10.4	<10	<10	<5	0.32	14	<5	147	<1
1838	0.786	5	12.5	<10	<5	18.2	<10	<10	<5	<0.01	6	<5	80.8	<1
1839	0.285	4	17.2	<10	<5	26.3	<10	<10	<5	<0.01	6	<5	127	<1
1840	0.126	7	2.8	<10	<5	33.2	<10	<10	<5	0.01	<5	<5	10.4	<1
1841	0.014	4	5.2	<10	<5	5.9	<10	<10	<5	0.01	6	<5	12.6	<1
1842	0.163	7	10.6	<10	<5	43.9	<10	<10	<5	<0.01	9	<5	39.5	<1
1843	0.153	5	3.4	<10	<5	91.6	<10	<10	<5	0.07	<5	<5	32.7	<1
1844	0.095	3	30.0	<10	<5	51.1	<10	<10	<5	0.05	10	<5	230	<1
1845	0.680	6	28.6	<10	<5	69.1	<10	<10	<5	0.06	10	<5	227	<1
1846	1.89	15	4.2	<10	<5	37.8	<10	<10	<5	<0.01	10	<5	70.1	<1
1847	1.36	2	24.5	<10	<5	106	<10	<10	<5	0.04	7	<5	200	<1
1848	0.797	6	27.1	<10	<5	54.4	<10	<10	<5	0.07	11	<5	213	<1
1849	0.176	4	27.3	<10	<5	44.5	<10	<10	<5	0.07	9	<5	215	<1
1850	0.064	<1	32.7	<10	<5	29.7	<10	<10	<5	0.11	13	<5	260	<1
1851	0.806	3	25.7	<10	<5	43.8	<10	<10	<5	0.06	9	<5	195	2
1852	1.31	4	21.5	<10	<5	49.3	<10	<10	<5	0.04	7	<5	158	<1

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
1853	0.526	4	14.8	<10	<5	34.0	<10	<10	<5	0.03	7	<5	126	<1
1854	0.607	<1	27.7	<10	<5	35.4	<10	<10	<5	0.06	10	<5	218	<1
1855	2.87	3	6.6	<10	<5	18.0	<10	<10	<5	0.01	8	<5	54.6	<1
1856	2.04	5	12.4	<10	<5	21.0	<10	<10	<5	0.02	7	<5	83.7	<1
1857	3.63	2	33.0	<10	<5	41.2	<10	<10	<5	0.02	9	<5	208	<1
1858	1.21	<1	36.0	<10	<5	7.4	<10	<10	<5	0.02	8	<5	309	8
1859	5.54	<1	40.7	13	<5	5.8	<10	<10	<5	0.02	8	7	289	<1
1860	4.82	2	14.7	<10	<5	8.6	<10	<10	<5	<0.01	10	<5	105	<1
1861	7.80	<1	16.6	<10	<5	3.1	<10	<10	<5	0.01	7	<5	106	<1
1862	1.05	<1	29.5	<10	<5	8.9	<10	<10	<5	0.02	8	<5	252	<1
1863	1.75	6	26.7	<10	<5	24.8	<10	<10	<5	0.03	9	6	186	<1
1864	2.67	3	20.5	<10	<5	23.6	<10	<10	<5	0.03	7	<5	144	<1
1865	5.27	5	12.9	<10	<5	30.6	<10	<10	<5	<0.01	9	<5	92.0	<1
1866	0.578	14	5.7	<10	<5	50.5	<10	<10	<5	0.10	9	<5	74.6	30
1867	0.334	5	12.3	<10	<5	43.4	<10	<10	<5	<0.01	8	<5	51.7	<1
1868	8.60	2	14.7	<10	<5	26.8	<10	<10	<5	<0.01	6	<5	35.2	<1
1869	0.079	5	13.1	<10	<5	27.8	<10	<10	<5	<0.01	6	<5	24.1	<1
1870	0.166	5	14.4	<10	<5	8.9	<10	<10	<5	<0.01	6	<5	37.7	<1
1871	0.148	7	3.6	<10	<5	95.0	<10	<10	<5	0.05	7	<5	30.7	<1
1872	0.355	3	22.2	29	<5	5.5	<10	<10	<5	<0.01	6	<5	66.6	<1
1873	0.422	2	22.4	<10	<5	6.0	<10	<10	<5	<0.01	6	<5	47.3	<1
1874	1.23	2	27.7	<10	<5	8.8	<10	<10	<5	<0.01	7	<5	44.5	<1
1875	2.16	3	12.4	<10	<5	6.2	<10	<10	<5	<0.01	6	<5	21.5	<1
1876	7.99	3	10.7	16	<5	8.9	<10	<10	<5	<0.01	6	<5	25.6	<1
1877	0.215	3	18.4	<10	<5	7.7	<10	<10	<5	<0.01	7	<5	55.0	<1
1878	0.114	4	15.9	<10	<5	8.7	<10	<10	<5	<0.01	9	<5	52.3	<1
1879	0.120	4	13.9	<10	<5	6.6	<10	<10	<5	<0.01	7	<5	29.1	<1
1880	1.12	3	18.1	<10	<5	10.9	<10	<10	<5	<0.01	7	<5	64.1	<1
1881	1.19	5	18.2	<10	<5	5.7	<10	<10	<5	<0.01	9	<5	58.2	<1
1882	0.155	3	22.0	<10	<5	10.9	<10	<10	<5	<0.01	7	<5	67.1	<1
1883	0.175	5	16.9	<10	<5	9.9	<10	<10	<5	<0.01	7	<5	43.7	<1
1884	0.498	3	22.6	<10	<5	10.2	<10	<10	<5	<0.01	6	<5	62.4	<1

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
1885	0.566	15	6.0	<10	<5	50.0	<10	<10	<5	0.10	8	<5	77.2	25
1886	0.364	3	27.7	<10	<5	6.4	<10	<10	<5	<0.01	8	<5	77.5	<1
1887	0.073	1	22.2	11	<5	6.9	<10	<10	<5	<0.01	<5	<5	55.1	<1
1888	4.03	6	11.8	<10	<5	8.1	<10	<10	<5	<0.01	9	<5	24.1	<1
1889	0.143	8	4.3	<10	<5	79.1	<10	<10	<5	0.07	9	<5	32.9	<1
1890	2.29	5	18.3	<10	<5	24.6	<10	<10	<5	<0.01	6	<5	44.0	<1
1891	1.92	8	17.8	<10	<5	18.1	<10	<10	<5	<0.01	7	<5	31.9	<1
1892	1.05	7	17.1	<10	<5	16.2	<10	<10	<5	<0.01	9	<5	36.4	<1
1893	0.616	5	12.1	<10	<5	19.0	<10	<10	<5	<0.01	7	<5	48.2	<1
1894	0.216	6	27.9	<10	<5	21.2	<10	<10	<5	<0.01	7	<5	28.6	<1
1895	0.090	5	17.4	<10	<5	19.9	<10	<10	<5	<0.01	6	<5	39.9	<1
1896	0.484	5	14.7	<10	<5	17.9	<10	<10	<5	<0.01	6	<5	32.1	<1
1897	0.773	7	14.0	<10	<5	17.8	<10	<10	<5	<0.01	8	<5	29.3	<1
1898	0.410	6	13.4	<10	<5	14.7	<10	<10	<5	<0.01	7	<5	23.3	<1
1899	0.901	7	16.9	<10	<5	23.0	<10	<10	<5	<0.01	6	<5	26.2	<1
1900	0.740	6	15.9	<10	<5	19.0	<10	<10	<5	<0.01	7	<5	30.0	<1
1901	1.12	7	20.0	<10	<5	22.1	<10	<10	<5	<0.01	9	<5	33.0	<1
1902	0.955	7	20.3	<10	<5	24.5	<10	<10	<5	<0.01	7	<5	35.6	<1
1903	0.599	5	27.2	<10	<5	13.7	<10	<10	<5	<0.01	8	<5	39.0	<1
1904	0.043	2	24.5	<10	<5	5.9	<10	<10	<5	<0.01	6	<5	29.4	<1
1905	1.02	6	11.9	<10	<5	13.2	<10	<10	<5	<0.01	7	<5	19.5	<1
1906	0.069	3	1.8	<10	<5	3.9	<10	<10	<5	<0.01	5	<5	5.0	<1
1907	1.92	15	4.0	<10	<5	29.8	<10	<10	<5	<0.01	10	<5	73.8	1
1908	1.09	6	12.5	<10	<5	15.7	<10	<10	<5	<0.01	8	<5	27.4	<1
1909	1.51	6	18.8	<10	<5	26.0	<10	<10	<5	<0.01	6	<5	36.6	<1
1910	0.354	5	18.8	<10	<5	23.2	<10	<10	<5	<0.01	7	<5	36.2	<1
1911	1.59	4	21.4	<10	<5	21.1	<10	<10	<5	<0.01	6	<5	34.4	<1
1912	1.00	5	19.4	<10	<5	15.7	<10	<10	<5	<0.01	6	<5	38.2	<1
1913	0.980	5	19.5	<10	<5	19.9	<10	<10	<5	<0.01	7	<5	33.9	<1
1914	1.29	6	8.8	<10	<5	9.5	<10	<10	<5	<0.01	9	<5	14.8	<1
1915	0.144	8	4.3	<10	<5	94.6	<10	<10	<5	0.07	7	<5	34.4	<1
1916	1.51	6	15.8	<10	<5	19.6	<10	<10	<5	<0.01	5	<5	26.5	<1

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
1917	1.02	5	5.5	<10	<5	7.7	<10	<10	<5	<0.01	6	<5	11.4	<1
1918	1.82	6	14.3	<10	<5	20.4	<10	<10	<5	<0.01	7	<5	24.8	<1
1919	0.568	6	14.2	<10	<5	12.9	<10	<10	<5	<0.01	7	<5	19.7	<1
1920	0.730	6	18.4	<10	<5	20.2	<10	<10	<5	<0.01	7	<5	32.4	<1
1921	0.488	5	19.1	<10	<5	18.0	<10	<10	<5	<0.01	6	<5	30.2	<1
1922	0.162	7	10.3	<10	<5	18.3	<10	<10	<5	<0.01	7	<5	22.7	<1
1923	0.126	7	3.8	<10	<5	83.0	<10	<10	<5	0.06	7	<5	32.2	<1
1924	0.587	5	18.9	<10	<5	20.1	<10	<10	<5	<0.01	6	<5	33.8	<1
1925	0.223	7	14.7	<10	<5	21.5	<10	<10	<5	<0.01	7	<5	27.6	<1
1926	0.226	6	14.5	<10	<5	20.2	<10	<10	<5	<0.01	6	<5	25.7	<1
1927	0.396	4	39.4	<10	<5	16.9	<10	<10	<5	<0.01	6	5	74.9	<1
1928	1.05	<1	10.6	<10	<5	17.4	<10	<10	<5	0.07	9	5	96.5	<1
1929	3.54	<1	6.7	<10	<5	32.0	<10	<10	<5	0.06	8	<5	70.4	<1
1930	1.90	<1	28.0	17	<5	10.0	<10	<10	<5	0.17	12	10	253	<1
1931	0.974	<1	26.0	<10	<5	21.9	<10	<10	<5	0.28	17	7	230	<1
1932	1.67	<1	34.2	<10	<5	13.8	<10	<10	<5	0.26	16	6	261	<1
1933	0.599	15	7.2	<10	<5	50.3	<10	<10	<5	0.13	11	<5	86.9	28
1934	0.617	5	42.0	<10	<5	18.6	<10	<10	<5	0.20	12	9	277	<1
1935	0.314	1	41.2	<10	<5	30.6	<10	<10	<5	0.21	15	8	286	<1
1936	0.781	6	38.3	<10	<5	17.3	<10	<10	<5	0.12	12	7	272	<1
1937	4.72	<1	34.2	<10	<5	25.2	<10	<10	<5	0.07	9	7	228	<1
1938	7.87	<1	30.8	<10	<5	22.6	<10	<10	<5	0.07	11	7	205	<1
1939	0.944	5	32.6	<10	<5	38.9	<10	<10	<5	0.05	9	7	170	<1
1940	2.66	3	23.8	<10	<5	25.1	<10	<10	<5	0.01	7	<5	92.8	<1
1941	0.194	<1	10.7	<10	<5	1.7	<10	<10	<5	<0.01	<5	<5	11.7	<1
1942	4.11	<1	20.9	<10	<5	1.9	<10	<10	<5	0.01	<5	<5	64.8	<1
1943	5.49	<1	17.5	<10	<5	<0.5	<10	<10	<5	0.01	<5	<5	63.6	<1
1944	2.64	5	13.1	<10	<5	32.4	<10	<10	<5	0.01	9	<5	47.4	<1
1945	0.154	6	4.1	<10	<5	94.7	<10	<10	<5	0.07	7	<5	31.3	<1
1946	0.535	9	12.2	<10	<5	154	<10	<10	<5	<0.01	<5	<5	51.0	<1
1947	0.707	6	2.7	<10	<5	11.0	<10	<10	<5	<0.01	8	<5	7.6	<1
1948	0.653	3	3.1	<10	<5	4.6	<10	<10	<5	<0.01	<5	<5	13.7	<1

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
1949	2.58	4	5.9	<10	<5	9.7	<10	<10	<5	<0.01	8	<5	25.6	<1
1950	2.08	17	4.8	<10	<5	32.0	<10	<10	<5	<0.01	9	<5	70.4	1
1951	0.372	4	5.0	<10	<5	6.3	<10	<10	<5	<0.01	5	<5	8.0	<1
1952	5.18	<1	5.3	<10	<5	5.5	<10	<10	<5	<0.01	<5	<5	21.6	<1
1953	4.97	<1	5.1	<10	<5	7.2	<10	<10	<5	<0.01	5	<5	18.2	<1
1954	1.97	4	6.3	<10	<5	10.6	<10	<10	<5	<0.01	7	<5	16.5	<1
1955	0.807	4	2.1	<10	<5	17.3	<10	<10	<5	<0.01	7	<5	15.8	<1
1956	5.98	<1	6.6	<10	<5	3.7	<10	<10	<5	<0.01	<5	<5	22.6	<1
1957	4.72	2	13.4	<10	<5	11.0	<10	<10	<5	<0.01	9	<5	106	<1
1958	5.04	<1	8.7	<10	<5	9.2	<10	<10	<5	<0.01	7	<5	71.4	<1
1959	2.93	4	1.3	<10	<5	11.3	<10	<10	<5	<0.01	7	<5	15.9	<1
1960	1.17	5	3.3	<10	<5	14.6	<10	<10	<5	<0.01	8	<5	22.0	<1
1961	8.39	1	8.7	<10	<5	7.2	<10	<10	<5	0.01	8	5	50.3	<1
1962	6.03	3	5.6	<10	<5	7.9	<10	<10	<5	0.01	8	<5	55.5	<1
1963	5.65	<1	12.2	31	<5	4.3	<10	<10	<5	0.02	6	9	65.3	<1
1964	4.12	3	1.7	<10	<5	9.7	<10	<10	<5	<0.01	8	<5	27.7	<1
1965	6.32	<1	22.0	<10	<5	3.9	<10	<10	<5	0.04	9	9	135	<1
1966	4.43	<1	37.9	<10	<5	2.1	<10	<10	<5	0.05	5	13	139	<1
1967	4.59	3	6.5	<10	<5	5.4	<10	<10	<5	0.01	8	<5	54.4	<1
1968	0.309	8	14.0	<10	<5	22.7	<10	<10	<5	0.31	17	<5	180	<1
1969	0.278	2	14.1	<10	<5	12.9	<10	<10	<5	0.26	15	<5	209	<1
1970	0.518	<1	16.9	<10	<5	21.1	<10	<10	<5	0.29	17	7	233	<1
1971	0.221	2	18.7	<10	<5	21.0	<10	<10	<5	0.35	18	5	266	<1
1972	0.287	4	18.5	<10	<5	22.4	<10	<10	<5	<0.01	6	<5	125	<1
1973	9.90	4	17.8	<10	<5	18.3	<10	<10	<5	<0.01	6	<5	40.4	<1
1974	5.77	6	30.6	<10	<5	23.4	<10	<10	<5	<0.01	<5	<5	40.3	<1
1975	0.126	8	3.2	<10	<5	86.0	<10	<10	<5	0.05	8	<5	28.9	<1
1976	0.598	4	20.8	<10	<5	12.4	<10	<10	<5	<0.01	6	<5	39.3	<1
1977	1.64	2	16.8	<10	<5	12.5	<10	<10	<5	<0.01	6	<5	41.9	<1
1978	0.252	<1	26.2	<10	<5	5.7	<10	<10	<5	<0.01	6	<5	61.9	<1
1979	3.15	6	18.1	<10	<5	23.1	<10	<10	<5	<0.01	7	<5	41.3	<1
1980	0.638	14	6.8	<10	<5	54.4	<10	<10	<5	0.12	9	<5	84.5	27

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
1981	8.82	3	25.9	<10	<5	20.2	<10	<10	<5	<0.01	6	<5	41.7	<1
1982	10.4	4	29.7	<10	<5	24.1	<10	<10	<5	<0.01	<5	<5	46.0	<1
1983	0.453	6	27.3	<10	<5	32.9	<10	<10	<5	<0.01	7	<5	35.2	<1
1984	0.239	8	23.0	<10	<5	25.7	<10	<10	<5	<0.01	6	<5	25.3	<1
1985	0.308	6	22.4	<10	<5	24.9	<10	<10	<5	<0.01	5	<5	33.2	<1
1986	0.446	6	22.5	<10	<5	26.8	<10	<10	<5	<0.01	<5	<5	33.8	<1
1987	1.14	7	24.1	<10	<5	30.7	<10	<10	<5	<0.01	7	<5	36.3	<1
1988	1.46	7	26.9	<10	<5	36.8	<10	<10	<5	<0.01	6	<5	38.7	<1
1989	2.01	6	22.1	<10	<5	28.8	<10	<10	<5	<0.01	6	<5	36.4	<1
1990	0.144	7	3.3	<10	<5	92.8	<10	<10	<5	0.05	5	<5	29.1	<1
1991	1.76	6	21.9	<10	<5	27.0	<10	<10	<5	<0.01	7	<5	33.2	<1
1992	1.72	7	24.8	<10	<5	34.7	<10	<10	<5	<0.01	5	<5	37.3	<1
1993	1.07	6	21.5	<10	<5	28.7	<10	<10	<5	<0.01	7	<5	42.3	<1
1994	1.93	18	4.8	<10	<5	31.4	<10	<10	<5	<0.01	9	<5	83.4	1
1995	0.070	6	12.2	<10	<5	15.1	<10	<10	<5	<0.01	6	<5	31.1	<1
1996	0.873	6	10.3	<10	<5	11.9	<10	<10	<5	<0.01	7	<5	19.9	<1
1997	0.586	7	17.9	<10	<5	23.2	<10	<10	<5	<0.01	7	<5	26.3	<1
1998	0.100	5	12.5	<10	<5	12.9	<10	<10	<5	<0.01	6	<5	23.2	<1

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
1760	1	28.4	<5
1761	1	80.3	<5
1762	1	73.9	<5
1763	1	88.8	<5
1764	2	41.6	<5
1765	<1	43.7	<5
1766	1	39.2	<5
1767	6	53.4	26
1768	6	544	12
1769	2	53.6	<5
1770	2	64.8	<5
1771	3	43.5	<5
1801	8	105	<5
1802	6	93.5	5
1803	10	89.1	<5
1804	9	93.8	<5
1805	6	33.5	7
1806	4	38.7	12
1807	9	21.2	<5
1808	6	25.7	7
1809	5	603	7
1810	8	335	24
1811	9	48.0	21
1812	7	50.8	9
1813	9	1240	7
1814	8	166	13
1815	9	138	<5
1816	6	85.4	21
1817	4	62.8	5
1818	4	67.9	<5
1819	4	99.2	<5
1820	4	132	<5

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
1821	5	77.5	<5
1822	17	138	<5
1823	19	142	<5
1824	22	35.7	22
1825	9	166	7
1826	5	38.5	9
1827	3	46.3	7
1828	2	15.0	6
1829	2	36.6	<5
1830	3	24.4	14
1831	4	20.7	<5
1832	4	46.2	17
1833	11	17.5	<5
1834	4	16.5	<5
1835	3	26.9	<5
1836	2	19.5	<5
1837	7	76.5	<5
1838	2	33.2	<5
1839	3	45.0	<5
1840	8	29.8	8
1841	9	18.9	22
1842	5	52.2	27
1843	10	18.5	<5
1844	3	84.4	<5
1845	3	93.2	<5
1846	8	149	6
1847	3	63.2	<5
1848	2	94.0	<5
1849	4	73.9	<5
1850	3	121	<5
1851	4	84.2	<5
1852	4	56.7	<5

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
1853	5	53.7	<5
1854	3	95.9	<5
1855	4	36.0	<5
1856	3	47.2	<5
1857	4	95.8	<5
1858	2	164	<5
1859	3	190	<5
1860	3	155	<5
1861	2	86.6	19
1862	2	207	<5
1863	4	147	<5
1864	3	82.3	<5
1865	4	72.1	<5
1866	8	1270	7
1867	2	63.8	<5
1868	2	35.4	<5
1869	2	55.3	<5
1870	2	38.0	<5
1871	9	23.2	<5
1872	2	63.7	<5
1873	2	49.2	<5
1874	2	44.9	<5
1875	2	25.7	<5
1876	1	22.0	<5
1877	2	43.2	<5
1878	3	39.1	<5
1879	2	27.2	<5
1880	3	46.5	<5
1881	3	48.5	<5
1882	3	68.4	<5
1883	2	51.7	<5
1884	3	54.2	<5

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
1885	9	1230	8
1886	3	55.8	<5
1887	3	58.8	<5
1888	2	22.1	<5
1889	10	17.6	<5
1890	2	36.1	<5
1891	2	27.3	<5
1892	1	28.7	<5
1893	3	41.3	<5
1894	2	34.2	<5
1895	1	36.9	<5
1896	<1	32.0	<5
1897	<1	20.3	<5
1898	1	19.8	<5
1899	2	16.4	<5
1900	<1	23.1	<5
1901	2	22.7	<5
1902	1	19.6	<5
1903	2	41.1	<5
1904	2	39.8	<5
1905	3	15.6	<5
1906	<1	5.3	<5
1907	7	134	7
1908	1	26.9	<5
1909	1	28.4	<5
1910	2	28.2	<5
1911	2	23.0	<5
1912	1	24.0	<5
1913	1	22.1	<5
1914	1	12.7	<5
1915	11	21.2	<5
1916	1	20.2	<5

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
1917	1	8.0	<5
1918	2	26.1	<5
1919	2	18.0	<5
1920	1	28.2	<5
1921	1	33.3	<5
1922	4	27.8	<5
1923	11	17.5	<5
1924	1	32.3	<5
1925	1	26.0	<5
1926	2	22.8	<5
1927	4	53.0	<5
1928	8	46.4	<5
1929	7	30.3	<5
1930	10	122	<5
1931	12	107	<5
1932	12	98.5	<5
1933	10	1360	9
1934	14	106	<5
1935	13	115	<5
1936	10	104	<5
1937	11	83.3	<5
1938	8	79.6	11
1939	13	87.2	25
1940	19	48.2	40
1941	11	47.6	33
1942	13	53.3	35
1943	12	83.2	18
1944	13	75.6	26
1945	13	24.6	<5
1946	15	44.1	6
1947	3	13.3	10
1948	2	21.4	8

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
1949	4	39.6	14
1950	8	145	8
1951	7	23.5	22
1952	3	33.7	20
1953	4	28.0	21
1954	6	53.0	25
1955	2	32.4	<5
1956	3	29.0	28
1957	4	84.1	19
1958	4	71.0	9
1959	5	34.9	<5
1960	4	17.1	<5
1961	6	57.0	16
1962	5	44.0	<5
1963	6	74.4	19
1964	5	19.5	<5
1965	4	89.1	10
1966	7	143	14
1967	5	57.1	<5
1968	6	79.5	<5
1969	5	93.4	<5
1970	8	101	<5
1971	9	89.6	<5
1972	2	74.9	<5
1973	3	20.6	<5
1974	4	22.2	<5
1975	10	22.5	<5
1976	2	46.0	<5
1977	3	30.7	<5
1978	2	46.9	<5
1979	4	23.9	<5
1980	10	1300	8

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
1981	4	19.0	<5
1982	4	16.4	<5
1983	2	27.9	<5
1984	3	25.0	<5
1985	2	28.9	<5
1986	3	22.7	<5
1987	3	27.7	<5
1988	4	24.4	<5
1989	3	25.7	<5
1990	13	19.7	<5
1991	3	24.7	<5
1992	5	22.4	<5
1993	2	32.0	<5
1994	8	140	7
1995	3	42.9	5
1996	1	25.4	<5
1997	2	23.8	<5
1998	2	47.5	<5

Comments: RDL - Reported Detection Limit

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
1760	2.26	0.005
1761	2.61	<0.002
1762	2.51	0.004
1763	1.94	0.002
1764	2.35	<0.002
1765	2.62	0.002
1766	2.02	0.003
1767	2.47	0.003
1768	1.32	0.027
1769	1.44	0.013
1770	2.54	0.007
1771	2.06	<0.002
1801	1.15	<0.002
1802	1.61	0.023
1803	1.51	<0.002
1804	1.57	<0.002
1805	2.22	<0.002
1806	2.18	0.003
1807	0.40	<0.002
1808	2.46	<0.002
1809	1.34	<0.002
1810	2.40	0.010
1811	2.45	0.009
1812	0.83	0.003
1813	0.05	7.31
1814	1.60	0.006
1815	1.21	<0.002
1816	2.07	0.011
1817	0.75	0.011
1818	2.28	<0.002
1819	1.96	0.003

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
1820	1.54	0.002
1821	1.83	0.004
1822	2.45	0.022
1823	2.00	0.016
1824	2.29	0.041
1825	0.05	3.70
1826	0.73	0.008
1827	2.27	0.003
1828	1.22	0.003
1829	1.17	0.004
1830	1.77	0.005
1831	1.51	0.002
1832	2.13	0.023
1833	0.34	<0.002
1834	1.99	<0.002
1835	2.03	0.011
1836	1.00	<0.002
1837	1.03	0.003
1838	1.61	0.003
1839	2.37	<0.002
1840	1.93	<0.002
1841	2.32	<0.002
1842	2.14	<0.002
1843	0.61	<0.002
1844	1.53	<0.002
1845	2.18	0.005
1846	0.05	3.60
1847	1.62	0.009
1848	1.35	0.004
1849	1.85	<0.002
1850	2.49	0.015

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
1851	1.39	0.008
1852	1.97	<0.002
1853	2.61	<0.002
1854	2.11	0.002
1855	2.61	0.005
1856	2.17	0.075
1857	1.73	0.019
1858	2.51	<0.002
1859	1.59	0.007
1860	1.06	0.004
1861	2.23	<0.002
1862	1.71	<0.002
1863	1.77	0.002
1864	1.98	0.008
1865	2.47	0.014
1866	0.05	7.66
1867	1.17	0.009
1868	1.21	0.193
1869	2.67	<0.002
1870	2.50	<0.002
1871	0.29	<0.002
1872	2.98	0.002
1873	1.43	0.004
1874	1.64	0.020
1875	1.89	0.740
1876	1.94	5.81
1877	2.53	0.011
1878	1.37	0.006
1879	1.05	<0.002
1880	2.37	0.018
1881	1.71	0.016

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
1882	1.45	0.004
1883	2.35	0.010
1884	1.51	0.004
1885	0.05	7.62
1886	1.35	0.003
1887	2.11	<0.002
1888	2.63	3.82
1889	0.39	<0.002
1890	2.13	0.087
1891	1.34	0.035
1892	3.11	0.003
1893	1.52	0.011
1894	2.43	<0.002
1895	1.51	0.003
1896	2.56	0.004
1897	2.17	0.034
1898	1.46	<0.002
1899	1.45	0.038
1900	2.34	0.002
1901	2.42	0.148
1902	1.15	0.006
1903	2.66	0.005
1904	2.57	<0.002
1905	1.32	0.284
1906	1.38	0.009
1907	0.05	4.00
1908	1.96	0.032
1909	2.90	0.054
1910	2.53	0.010
1911	2.67	0.192
1912	1.13	0.003

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
1913	1.26	0.005
1914	1.91	0.068
1915	0.36	<0.002
1916	1.46	0.017
1917	1.27	0.104
1918	1.08	0.294
1919	1.44	0.010
1920	2.52	0.006
1921	1.31	0.004
1922	2.19	0.003
1923	0.40	<0.002
1924	1.23	0.006
1925	2.70	0.002
1926	1.94	0.030
1927	1.46	0.003
1928	1.91	0.004
1929	2.34	0.063
1930	2.26	0.006
1931	2.33	0.006
1932	2.40	0.006
1933	0.05	7.22
1934	2.38	0.005
1935	2.19	0.002
1936	1.97	<0.002
1937	2.43	0.005
1938	0.91	0.015
1939	0.48	<0.002
1940	2.36	<0.002
1941	1.07	<0.002
1942	1.60	0.004
1943	1.48	0.041

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
1944	2.14	0.007
1945	0.36	<0.002
1946	0.84	<0.002
1947	0.96	<0.002
1948	2.64	0.002
1949	1.01	<0.002
1950	0.05	3.76
1951	0.80	<0.002
1952	1.93	0.015
1953	2.20	0.009
1954	1.83	<0.002
1955	1.25	<0.002
1956	2.08	0.003
1957	2.48	0.003
1958	2.19	0.016
1959	2.19	0.003
1960	0.80	<0.002
1961	2.41	0.006
1962	2.48	0.005
1963	2.50	<0.002
1964	2.10	0.003
1965	2.43	0.006
1966	1.81	0.022
1967	2.17	0.023
1968	2.32	0.002
1969	2.31	0.015
1970	1.37	0.064
1971	1.26	<0.002
1972	1.92	0.004
1973	2.22	6.16
1974	1.30	2.88

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Apr 24, 2012 | DATE RECEIVED: Apr 24, 2012 | DATE REPORTED: May 09, 2012 | SAMPLE TYPE: Rock

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
1975	0.37	0.003
1976	1.17	0.016
1977	3.14	0.011
1978	1.32	0.012
1979	1.55	0.070
1980	0.05	7.02
1981	2.63	6.58
1982	1.33	5.16
1983	1.43	0.019
1984	1.21	<0.002
1985	1.12	0.003
1986	1.47	0.004
1987	2.28	0.034
1988	2.32	0.113
1989	2.05	0.018
1990	0.34	<0.002
1991	2.41	0.560
1992	2.60	0.031
1993	2.46	0.027
1994	0.07	3.85
1995	2.31	<0.002
1996	0.88	0.002
1997	1.45	1.30
1998	1.09	0.009

Comments: RDL - Reported Detection Limit

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: SEA GREEN CAPITAL CORP.

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

ATTENTION TO: MITCHELL LAVERY

Solid Analysis

RPT Date: May 09, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	3280015	< 0.2	< 0.2	0.0%	< 0.2	6.3	6.0	105%	80%	120%
Al	1	3280015	0.41	0.48	15.7%	< 0.01				80%	120%
As	1	3280015	127	134	5.4%	< 1				80%	120%
B	1	3280015	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3280015	7	6	15.4%	< 1				80%	120%
Be	1	3280015	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	3280142	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	3280015	5.67	6.35	11.3%	< 0.01				80%	120%
Cd	1	3280015	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	3280015	< 1	< 1	0.0%	< 1				80%	120%
Co	1	3280015	31.3	33.3	6.2%	< 0.5				80%	120%
Cr	1	3280015	35.8	35.7	0.3%	< 0.5				80%	120%
Cu	1	3280015	76.5	76.3	0.3%	< 0.5	3962	3800	104%	80%	120%
Fe	1	3280015	6.38	7.25	12.8%	< 0.01				80%	120%
Ga	1	3280116	7	8	13.3%	< 5				80%	120%
Hg	1	3280015	< 1	< 1	0.0%	< 1				80%	120%
In	1	3280116	< 1	< 1	0.0%	< 1				80%	120%
K	1	3280015	0.051	0.058	12.8%	< 0.01				80%	120%
La	1	3280015	< 1	< 1	0.0%	< 1				80%	120%
Li	1	3280015	1	1	0.0%	< 1				80%	120%
Mg	1	3280015	3.94	4.37	10.3%	< 0.01				80%	120%
Mn	1	3280015	1510	1550	2.6%	< 1				80%	120%
Mo	1	3280142	< 0.5	< 0.5	0.0%	< 0.5	398	380	104%	80%	120%
Na	1	3280015	0.12	0.14	15.4%	< 0.01				80%	120%
Ni	1	3280015	74.7	72.3	3.3%	< 0.5				80%	120%
P	1	3280015	225	246	8.9%	< 10				80%	120%
Pb	1	3280015	0.9	0.8	11.8%	< 0.5				80%	120%
Rb	1	3280015	< 10	< 10	0.0%	< 10				80%	120%
S	1	3280015	0.721	0.795	9.8%	< 0.005				80%	120%
Sb	1	3280015	5	6	18.2%	< 1				80%	120%
Sc	1	3280015	17.2	17.3	0.6%	< 0.5				80%	120%
Se	1	3280015	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	3280015	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	3280015	12.2	11.6	5.0%	< 0.5				80%	120%
Ta	1	3280015	< 10	< 10	0.0%	< 10				80%	120%
Te	1	3280015	< 10	< 10	0.0%	< 10				80%	120%
Th	1	3280015	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	3280015	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	3280015	8	6	28.6%	< 5				80%	120%
U	1	3280015	< 5	< 5	0.0%	< 5				80%	120%
V	1	3280015	24.9	25.6	2.8%	< 0.5				80%	120%
W	1	3280015	< 1	< 1	0.0%	< 1				80%	120%
Y	1	3280015	1	1	0.0%	< 1				80%	120%
Zn	1	3280015	28.4	29.9	5.1%	< 0.5				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: SEA GREEN CAPITAL CORP.

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

ATTENTION TO: MITCHELL LAVERY

Solid Analysis (Continued)

RPT Date: May 09, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Zr	1	3280015	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	3280040	< 0.2	< 0.2	0.0%	< 0.2	5.8	6.0	96%	80%	120%
Al	1	3280040	2.36	2.31	2.1%	< 0.01				80%	120%
As	1	3280040	6	5	18.2%	< 1				80%	120%
B	1	3280040	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3280040	4	3	28.6%	< 1				80%	120%
Be	1	3280040	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	3280166	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	3280040	0.995	0.965	3.1%	< 0.01				80%	120%
Cd	1	3280040	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	3280040	10	10	0.0%	< 1				80%	120%
Co	1	3280040	53.9	51.9	3.8%	< 0.5				80%	120%
Cr	1	3280040	108	109	0.9%	< 0.5				80%	120%
Cu	1	3280040	294	295	0.3%	< 0.5	3622	3800	95%	80%	120%
Fe	1	3280040	8.68	8.57	1.3%	< 0.01				80%	120%
Ga	1	3280040	12	11	8.7%	< 5				80%	120%
Hg	1	3280040	< 1	< 1	0.0%	< 1				80%	120%
In	1	3280166	< 1	< 1	0.0%	< 1				80%	120%
K	1	3280040	0.01	0.01	0.0%	< 0.01				80%	120%
La	1	3280040	5	5	0.0%	< 1				80%	120%
Li	1	3280040	8	7	13.3%	< 1				80%	120%
Mg	1	3280040	1.44	1.42	1.4%	< 0.01				80%	120%
Mn	1	3280040	1030	1000	3.0%	< 1				80%	120%
Mo	1	3280166	1.7	3.5		< 0.5	383	380	100%	80%	120%
Na	1	3280040	0.04	0.04	0.0%	< 0.01				80%	120%
Ni	1	3280040	75.7	74.3	1.9%	< 0.5				80%	120%
P	1	3280040	302	306	1.3%	< 10				80%	120%
Pb	1	3280040	6.26	5.75	8.5%	< 0.5				80%	120%
Rb	1	3280040	< 10	< 10	0.0%	< 10				80%	120%
S	1	3280040	2.38	2.36	0.8%	< 0.005				80%	120%
Sb	1	3280166	3	3	0.0%	< 1				80%	120%
Sc	1	3280040	16.5	15.5	6.3%	< 0.5				80%	120%
Se	1	3280040	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	3280040	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	3280040	3.6	3.0	18.2%	< 0.5				80%	120%
Ta	1	3280040	< 10	< 10	0.0%	< 10				80%	120%
Te	1	3280040	< 10	< 10	0.0%	< 10				80%	120%
Th	1	3280040	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	3280040	0.14	0.11	24.0%	< 0.01				80%	120%
Tl	1	3280040	11	9	20.0%	< 5				80%	120%
U	1	3280040	< 5	< 5	0.0%	< 5				80%	120%
V	1	3280040	107	105	1.9%	< 0.5				80%	120%
W	1	3280040	< 1	< 1	0.0%	< 1				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: SEA GREEN CAPITAL CORP.

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

ATTENTION TO: MITCHELL LAVERY

Solid Analysis (Continued)

RPT Date: May 09, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Y	1	3280040	8	6	28.6%	< 1				80%	120%
Zn	1	3280040	166	167	0.6%	< 0.5				80%	120%
Zr	1	3280040	13	10	26.1%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	3280065	< 0.2	< 0.2	0.0%	< 0.2	5.8	6.0	96%	80%	120%
Al	1	3280065	3.79	3.54	6.8%	< 0.01				80%	120%
As	1	3280065	506	484	4.4%	< 1				80%	120%
B	1	3280065	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3280065	31	28	10.2%	< 1				80%	120%
Be	1	3280065	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	3280065	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	3280065	7.90	7.55	4.5%	< 0.01				80%	120%
Cd	1	3280065	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	3280191	1	3		< 1				80%	120%
Co	1	3280065	33.0	30.7	7.2%	< 0.5				80%	120%
Cr	1	3280065	155	150	3.3%	< 0.5				80%	120%
Cu	1	3280065	81.3	77.8	4.4%	< 0.5	3754	3800	98%	80%	120%
Fe	1	3280065	7.32	6.96	5.0%	< 0.01				80%	120%
Ga	1	3280065	11	11	0.0%	< 5				80%	120%
Hg	1	3280065	< 1	< 1	0.0%	< 1				80%	120%
In	1	3280065	< 1	< 1	0.0%	< 1				80%	120%
K	1	3280065	0.19	0.17	11.1%	< 0.01				80%	120%
La	1	3280191	1	1	0.0%	< 1				80%	120%
Li	1	3280065	25	24	4.1%	< 1				80%	120%
Mg	1	3280065	4.42	4.16	6.1%	< 0.01				80%	120%
Mn	1	3280065	1560	1530	1.9%	< 1				80%	120%
Mo	1	3280191	1.1	< 0.5		< 0.5	371	380	97%	80%	120%
Na	1	3280065	0.06	0.06	0.0%	< 0.01				80%	120%
Ni	1	3280065	101	99.1	1.9%	< 0.5				80%	120%
P	1	3280065	238	227	4.7%	< 10				80%	120%
Pb	1	3280065	6.55	5.49	17.6%	< 0.5				80%	120%
Rb	1	3280065	15	14	6.9%	< 10				80%	120%
S	1	3280065	0.285	0.274	3.9%	< 0.005				80%	120%
Sb	1	3280065	4	4	0.0%	< 1				80%	120%
Sc	1	3280065	17.2	16.5	4.2%	< 0.5				80%	120%
Se	1	3280065	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	3280065	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	3280065	26.3	27.5	4.5%	< 0.5				80%	120%
Ta	1	3280065	< 10	< 10	0.0%	< 10				80%	120%
Te	1	3280065	< 10	< 10	0.0%	< 10				80%	120%
Th	1	3280065	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	3280065	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	3280065	6	8	28.6%	< 5				80%	120%
U	1	3280065	< 5	< 5	0.0%	< 5				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: SEA GREEN CAPITAL CORP.
AGAT WORK ORDER: 12U593496
PROJECT NO: CASA NORTH
ATTENTION TO: MITCHELL LAVERY

Solid Analysis (Continued)

RPT Date: May 09, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
V	1	3280065	127	121	4.8%	< 0.5				80%	120%
W	1	3280065	< 1	< 1	0.0%	< 1				80%	120%
Y	1	3280065	3	3	0.0%	< 1				80%	120%
Zn	1	3280065	45.0	45.4	0.9%	< 0.5				80%	120%
Zr	1	3280065	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	3280090	< 0.2	< 0.2	0.0%	< 0.2	5.7	6.0	95%	80%	120%
Al	1	3280090	3.53	3.50	0.9%	< 0.01				80%	120%
As	1	3280090	31	33	6.3%	< 1				80%	120%
B	1	3280090	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3280216	77	72	6.7%	< 1				80%	120%
Be	1	3280090	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	3280090	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	3280090	7.53	7.48	0.7%	< 0.01				80%	120%
Cd	1	3280090	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	3280216	37	36	2.7%	< 1				80%	120%
Co	1	3280090	168	168	0.0%	< 0.5				80%	120%
Cr	1	3280090	84.8	83.4	1.7%	< 0.5				80%	120%
Cu	1	3280090	751	728	3.1%	< 0.5	3729	3800	98%	80%	120%
Fe	1	3280090	13.1	13.1	0.0%	< 0.01				80%	120%
Ga	1	3280090	14	13	7.4%	< 5				80%	120%
Hg	1	3280090	< 1	< 1	0.0%	< 1				80%	120%
In	1	3280090	< 1	< 1	0.0%	< 1				80%	120%
K	1	3280090	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
La	1	3280090	< 1	< 1	0.0%	< 1				80%	120%
Li	1	3280090	9	9	0.0%	< 1				80%	120%
Mg	1	3280090	3.13	3.13	0.0%	< 0.01				80%	120%
Mn	1	3280090	3630	3520	3.1%	< 1				80%	120%
Mo	1	3280216	1.2	1.3	8.0%	< 0.5	370	380	97%	80%	120%
Na	1	3280090	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	3280090	69.6	67.3	3.4%	< 0.5				80%	120%
P	1	3280090	94	84	11.2%	< 10				80%	120%
Pb	1	3280090	8.4	8.9	5.8%	< 0.5				80%	120%
Rb	1	3280090	< 10	< 10	0.0%	< 10				80%	120%
S	1	3280090	2.67	2.73	2.2%	< 0.005				80%	120%
Sb	1	3280216	7	7	0.0%	< 1				80%	120%
Sc	1	3280090	20.5	20.3	1.0%	< 0.5				80%	120%
Se	1	3280090	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	3280090	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	3280090	23.6	23.9	1.3%	< 0.5				80%	120%
Ta	1	3280090	< 10	< 10	0.0%	< 10				80%	120%
Te	1	3280090	< 10	< 10	0.0%	< 10				80%	120%
Th	1	3280090	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	3280090	0.03	0.03	0.0%	< 0.01				80%	120%
Tl	1	3280090	7	7	0.0%	< 5				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: SEA GREEN CAPITAL CORP.

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

ATTENTION TO: MITCHELL LAVERY

Solid Analysis (Continued)

RPT Date: May 09, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
U	1	3280090	< 5	< 5	0.0%	< 5				80%	120%
V	1	3280090	144	143	0.7%	< 0.5				80%	120%
W	1	3280090	< 1	< 1	0.0%	< 1				80%	120%
Y	1	3280090	3	3	0.0%	< 1				80%	120%
Zn	1	3280090	82.3	81.1	1.5%	< 0.5				80%	120%
Zr	1	3280090	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	3280217	< 0.2	< 0.2	0.0%	< 0.2	5.7	6.0	95%	80%	120%
Al	1	3280217	0.70	0.72	2.8%	< 0.01				80%	120%
As	1	3280217	224	218	2.7%	< 1				80%	120%
B	1	3280217	6	6	0.0%	< 5				80%	120%
Ba	1	3280217	13	13	0.0%	< 1				80%	120%
Be	1	3280217	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	3280217	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	3280217	6.66	6.81	2.2%	< 0.01				80%	120%
Cd	1	3280217	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	3280217	2	2	0.0%	< 1				80%	120%
Co	1	3280217	39.3	38.1	3.1%	< 0.5				80%	120%
Cr	1	3280217	38.0	39.7	4.4%	< 0.5				80%	120%
Cu	1	3280217	159	156	1.9%	< 0.5	3758	3800	98%	80%	120%
Fe	1	3280217	6.08	6.24	2.6%	< 0.01				80%	120%
Ga	1	3280217	6	6	0.0%	< 5				80%	120%
Hg	1	3280217	< 1	< 1	0.0%	< 1				80%	120%
In	1	3280217	< 1	< 1	0.0%	< 1				80%	120%
K	1	3280217	0.07	0.07	0.0%	< 0.01				80%	120%
La	1	3280217	< 1	< 1	0.0%	< 1				80%	120%
Li	1	3280217	2	2	0.0%	< 1				80%	120%
Mg	1	3280217	3.82	3.86	1.0%	< 0.01				80%	120%
Mn	1	3280217	1630	1670	2.4%	< 1				80%	120%
Mo	1	3280217	0.7	0.7	0.0%	< 0.5				80%	120%
Na	1	3280217	0.193	0.198	2.6%	< 0.01				80%	120%
Ni	1	3280217	80.2	78.2	2.5%	< 0.5				80%	120%
P	1	3280217	235	230	2.2%	< 10				80%	120%
Pb	1	3280217	2.3	1.2		< 0.5				80%	120%
Rb	1	3280217	11	11	0.0%	< 10				80%	120%
S	1	3280217	1.76	1.80	2.2%	< 0.005				80%	120%
Sb	1	3280217	6	7	15.4%	< 1				80%	120%
Sc	1	3280217	21.9	22.5	2.7%	< 0.5				80%	120%
Se	1	3280217	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	3280217	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	3280217	27.0	29.2	7.8%	< 0.5				80%	120%
Ta	1	3280217	< 10	< 10	0.0%	< 10				80%	120%
Te	1	3280217	< 10	< 10	0.0%	< 10				80%	120%
Th	1	3280217	< 5	< 5	0.0%	< 5				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: SEA GREEN CAPITAL CORP.

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

ATTENTION TO: MITCHELL LAVERY

Solid Analysis (Continued)

RPT Date: May 09, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Ti	1	3280217	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	3280217	7	6	15.4%	< 5				80%	120%
U	1	3280217	< 5	< 5	0.0%	< 5				80%	120%
V	1	3280217	33.2	34.6	4.1%	< 0.5				80%	120%
W	1	3280217	< 1	< 1	0.0%	< 1				80%	120%
Y	1	3280217	3	3	0.0%	< 1				80%	120%
Zn	1	3280217	24.7	23.8	3.7%	< 0.5				80%	120%
Zr	1	3280217	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Co	1					< 0.5	5.7	5.0	115%	80%	120%
Cu	1					< 0.5	3792	3800	99%	80%	120%
Hg	1					< 1	1.5	1.3	118%	80%	120%
Rb	1					< 10	11	13	86%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	3280090	0.0075	0.0074	1.3%	< 0.002	0.983	1.027	95%	90%	110%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	3280026	< 0.002	< 0.002	0.0%	< 0.002	0.0768	0.0849	90%	90%	110%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	3280191	0.006	0.004		< 0.002	0.194	0.203	95%	90%	110%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	3280202	0.0162	0.0205	23.4%	< 0.002	0.977	1.027	95%	90%	110%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	3280065	< 0.002	< 0.002	0.0%	< 0.002				90%	110%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	3280224	0.009	0.009	0.0%	< 0.002				90%	110%

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Method Summary

CLIENT NAME: SEA GREEN CAPITAL CORP.

AGAT WORK ORDER: 12U593496

PROJECT NO: CASA NORTH

ATTENTION TO: MITCHELL LAVERY

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE
Solid Analysis			
Ag	MIN-200-12020		ICP/OES
Al	MIN-200-12020		ICP/OES
As	MIN-200-12020		ICP/OES
B	MIN-200-12020		ICP/OES
Ba	MIN-200-12020		ICP/OES
Be	MIN-200-12020		ICP/OES
Bi	MIN-200-12020		ICP/OES
Ca	MIN-200-12020		ICP/OES
Cd	MIN-200-12020		ICP/OES
Ce	MIN-200-12020		ICP/OES
Co	MIN-200-12020		ICP/OES
Cr	MIN-200-12020		ICP/OES
Cu	MIN-200-12020		ICP/OES
Fe	MIN-200-12020		ICP/OES
Ga	MIN-200-12020		ICP/OES
Hg	MIN-200-12020		ICP/OES
In	MIN-200-12020		ICP/OES
K	MIN-200-12020		ICP/OES
La	MIN-200-12020		ICP/OES
Li	MIN-200-12020		ICP/OES
Mg	MIN-200-12020		ICP/OES
Mn	MIN-200-12020		ICP/OES
Mo	MIN-200-12020		ICP/OES
Na	MIN-200-12020		ICP/OES
Ni	MIN-200-12020		ICP/OES
P	MIN-200-12020		ICP/OES
Pb	MIN-200-12020		ICP/OES
Rb	MIN-200-12020		ICP/OES
S	MIN-200-12020		ICP/OES
Sb	MIN-200-12020		ICP/OES
Sc	MIN-200-12020		ICP/OES
Se	MIN-200-12020		ICP/OES
Sn	MIN-200-12020		ICP/OES
Sr	MIN-200-12020		ICP/OES
Ta	MIN-200-12020		ICP/OES
Te	MIN-200-12020		ICP/OES
Th	MIN-200-12020		ICP/OES
Ti	MIN-200-12020		ICP/OES
Tl	MIN-200-12020		ICP/OES
U	MIN-200-12020		ICP/OES
V	MIN-200-12020		ICP/OES
W	MIN-200-12020		ICP/OES
Y	MIN-200-12020		ICP/OES
Zn	MIN-200-12020		ICP/OES
Zr	MIN-200-12020		ICP/OES
Sample Login Weight	MIN-12009		BALANCE
Au	MIN-200-12019	BUGBEE, E: A Textbook of Fire Assaying	AAS

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

CLIENT NAME: SEA GREEN CAPITAL CORP.
2899 7IE RUE
VAL-D-'OR, QC J9P6P6
(613) 298-1596

ATTENTION TO: MITCHELL LAVERY

PROJECT NO: CASA NORTH

AGAT WORK ORDER: 12U616947

SOLID ANALYSIS REVIEWED BY: Kevin Motomura, ICP Supervisor

DATE REPORTED: Jul 18, 2012

PAGES (INCLUDING COVER): 7

Should you require any information regarding this analysis please contact your client services representative at (905) 501-9998

*NOTES

All samples are stored at no charge for 90 days. Please contact the lab if you require additional sample storage time.

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U616947

PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Jul 05, 2012 | DATE RECEIVED: Jul 05, 2012 | DATE REPORTED: Jul 18, 2012 | SAMPLE TYPE: Rock

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5471772	<0.2	0.38	66	<5	3	<0.5	5	3.62	<0.5	<1	28.9	15.0	123	8.07
E5471773	<0.2	0.26	80	<5	3	<0.5	4	4.12	<0.5	<1	37.0	17.7	80.9	8.21
E5471774	<0.2	0.38	62	<5	3	<0.5	3	3.36	<0.5	<1	34.1	14.3	127	8.21
E5471775	<0.2	0.27	62	6	2	<0.5	3	3.09	<0.5	<1	26.2	13.4	252	10.1
E5471776	<0.2	0.33	63	<5	2	<0.5	5	3.00	<0.5	<1	26.1	12.1	175	9.71
E5471777	<0.2	0.29	60	<5	3	<0.5	7	2.66	<0.5	<1	30.2	12.9	159	12.5
E5471778	<0.2	0.35	65	7	3	<0.5	6	1.10	<0.5	<1	27.4	12.7	118	13.4

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5471772	<5	<1	<1	0.02	2	2	2.21	1790	1.0	0.12	28.2	362	1.8	<10
E5471773	<5	<1	<1	0.01	2	<1	2.53	2090	<0.5	0.08	28.5	358	1.8	<10
E5471774	<5	<1	<1	0.02	2	1	2.63	2370	<0.5	0.12	29.7	355	1.5	<10
E5471775	5	<1	<1	0.02	2	1	3.04	3380	<0.5	0.08	25.0	309	2.3	<10
E5471776	<5	<1	<1	0.01	2	1	2.69	3330	1.0	0.10	26.7	310	2.3	<10
E5471777	<5	<1	<1	0.02	<1	1	2.85	3200	1.2	0.08	24.2	322	1.7	<10
E5471778	8	<1	<1	0.03	<1	2	3.94	2700	<0.5	0.08	23.0	308	2.6	<10

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5471772	0.087	<1	16.1	<10	<5	6.0	<10	<10	<5	<0.01	<5	<5	27.0	<1
E5471773	0.085	<1	16.8	<10	<5	6.1	<10	<10	<5	<0.01	6	5	26.4	<1
E5471774	0.098	<1	16.4	<10	<5	4.0	<10	<10	<5	<0.01	6	5	31.0	<1
E5471775	0.204	<1	18.7	<10	<5	<0.5	<10	<10	<5	<0.01	6	8	32.0	<1
E5471776	0.156	<1	18.9	<10	<5	1.0	<10	<10	<5	<0.01	6	7	35.6	<1
E5471777	0.897	<1	17.4	<10	<5	<0.5	<10	<10	<5	<0.01	6	6	36.7	<1
E5471778	0.613	<1	22.6	<10	<5	<0.5	<10	<10	<5	<0.01	6	6	43.7	<1

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U616947
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Jul 05, 2012 | DATE RECEIVED: Jul 05, 2012 | DATE REPORTED: Jul 18, 2012 | SAMPLE TYPE: Rock

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
E5471772	2	33.7	<5
E5471773	2	34.7	<5
E5471774	2	54.2	<5
E5471775	1	45.6	<5
E5471776	2	44.3	<5
E5471777	1	44.1	<5
E5471778	2	49.3	<5

Comments: RDL - Reported Detection Limit

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12U616947
PROJECT NO: CASA NORTH

CLIENT NAME: SEA GREEN CAPITAL CORP.

ATTENTION TO: MITCHELL LAVERY

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Jul 05, 2012 | DATE RECEIVED: Jul 05, 2012 | DATE REPORTED: Jul 18, 2012 | SAMPLE TYPE: Rock

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5471772	3.06	0.006
E5471773	3.00	<0.002
E5471774	3.08	0.002
E5471775	2.82	0.009
E5471776	2.96	0.005
E5471777	2.70	0.032
E5471778	2.72	0.015

Comments: RDL - Reported Detection Limit

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: SEA GREEN CAPITAL CORP.

AGAT WORK ORDER: 12U616947

PROJECT NO: CASA NORTH

ATTENTION TO: MITCHELL LAVERY

Solid Analysis

RPT Date: Jul 18, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	3485265	0.0058	0.0043	29.7%	< 0.002	1.00	1.03	97%	90%	110%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	3485265	< 0.2	< 0.2	0.0%	< 0.2				80%	120%
Al	1	3485265	0.38	0.38	0.0%	< 0.01				80%	120%
As	1	3485265	66	67	1.5%	< 1				80%	120%
B	1	3485265	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3485265	3	3	0.0%	< 1				80%	120%
Be	1	3485265	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	3485265	5	3		< 1				80%	120%
Ca	1	3485265	3.62	3.62	0.0%	< 0.01				80%	120%
Cd	1	3485265	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	3485265	< 1	< 1	0.0%	< 1				80%	120%
Co	1	3485265	28.9	28.1	2.8%	< 0.5				80%	120%
Cr	1	3485265	15.0	18.2	19.3%	< 0.5				80%	120%
Cu	1	3485265	123	121	1.6%	< 0.5	3792	3800	99%	80%	120%
Fe	1	3485265	8.07	8.07	0.0%	< 0.01				80%	120%
Ga	1	3485265	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	3485265	< 1	< 1	0.0%	< 1				80%	120%
In	1	3485265	< 1	< 1	0.0%	< 1				80%	120%
K	1	3485265	0.02	0.02	0.0%	< 0.01				80%	120%
La	1	3485265	2	2	0.0%	< 1				80%	120%
Li	1	3485265	2	2	0.0%	< 1				80%	120%
Mg	1	3485265	2.21	2.16	2.3%	< 0.01				80%	120%
Mn	1	3485265	1790	1790	0.0%	< 1				80%	120%
Mo	1	3485265	1.0	1.1	9.5%	< 0.5				80%	120%
Na	1	3485265	0.12	0.12	0.0%	< 0.01				80%	120%
Ni	1	3485265	28.2	32.5	14.2%	< 0.5				80%	120%
P	1	3485265	362	344	5.1%	< 10	485	600	81%	80%	120%
Pb	1	3485265	1.85	1.44	24.9%	1.2				80%	120%
Rb	1	3485265	< 10	< 10	0.0%	< 10	12	13	92%	80%	120%
S	1	3485265	0.0867	0.0834	3.9%	< 0.005				80%	120%
Sb	1	3485265	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	3485265	16.1	15.8	1.9%	< 0.5				80%	120%
Se	1	3485265	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	3485265	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	3485265	6.0	5.5	8.7%	< 0.5				80%	120%
Ta	1	3485265	< 10	< 10	0.0%	< 10				80%	120%
Te	1	3485265	< 10	< 10	0.0%	< 10				80%	120%
Th	1	3485265	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	3485265	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	3485265	4	5	22.2%	< 5				80%	120%
U	1	3485265	< 5	< 5	0.0%	< 5				80%	120%
V	1	3485265	27.0	28.3	4.7%	< 0.5				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: SEA GREEN CAPITAL CORP.

AGAT WORK ORDER: 12U616947

PROJECT NO: CASA NORTH

ATTENTION TO: MITCHELL LAVERY

Solid Analysis (Continued)

RPT Date: Jul 18, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
W	1	3485265	< 1	< 1	0.0%	< 1				80%	120%
Y	1	3485265	2	1		< 1				80%	120%
Zn	1	3485265	33.7	33.3	1.2%	0.6				80%	120%
Zr	1	3485265	< 5	< 5	0.0%	< 5				80%	120%

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Method Summary

CLIENT NAME: SEA GREEN CAPITAL CORP.

AGAT WORK ORDER: 12U616947

PROJECT NO: CASA NORTH

ATTENTION TO: MITCHELL LAVERY

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE
Solid Analysis			
Ag	MIN-200-12020		ICP/OES
Al	MIN-200-12020		ICP/OES
As	MIN-200-12020		ICP/OES
B	MIN-200-12020		ICP/OES
Ba	MIN-200-12020		ICP/OES
Be	MIN-200-12020		ICP/OES
Bi	MIN-200-12020		ICP/OES
Ca	MIN-200-12020		ICP/OES
Cd	MIN-200-12020		ICP/OES
Ce	MIN-200-12020		ICP/OES
Co	MIN-200-12020		ICP/OES
Cr	MIN-200-12020		ICP/OES
Cu	MIN-200-12020		ICP/OES
Fe	MIN-200-12020		ICP/OES
Ga	MIN-200-12020		ICP/OES
Hg	MIN-200-12020		ICP/OES
In	MIN-200-12020		ICP/OES
K	MIN-200-12020		ICP/OES
La	MIN-200-12020		ICP/OES
Li	MIN-200-12020		ICP/OES
Mg	MIN-200-12020		ICP/OES
Mn	MIN-200-12020		ICP/OES
Mo	MIN-200-12020		ICP/OES
Na	MIN-200-12020		ICP/OES
Ni	MIN-200-12020		ICP/OES
P	MIN-200-12020		ICP/OES
Pb	MIN-200-12020		ICP/OES
Rb	MIN-200-12020		ICP/OES
S	MIN-200-12020		ICP/OES
Sb	MIN-200-12020		ICP/OES
Sc	MIN-200-12020		ICP/OES
Se	MIN-200-12020		ICP/OES
Sn	MIN-200-12020		ICP/OES
Sr	MIN-200-12020		ICP/OES
Ta	MIN-200-12020		ICP/OES
Te	MIN-200-12020		ICP/OES
Th	MIN-200-12020		ICP/OES
Ti	MIN-200-12020		ICP/OES
Tl	MIN-200-12020		ICP/OES
U	MIN-200-12020		ICP/OES
V	MIN-200-12020		ICP/OES
W	MIN-200-12020		ICP/OES
Y	MIN-200-12020		ICP/OES
Zn	MIN-200-12020		ICP/OES
Zr	MIN-200-12020		ICP/OES
Sample Login Weight	MIN-12009		BALANCE
Au	MIN-200-12019	BUGBEE, E: A Textbook of Fire Assaying	AAS

Results relate only to the items tested and to all the items tested

APPENDIX – IV

Statement of Costs

(Hors texte)

REÇU AU MRNF
19 MARS 2014
DIRECTION DES TITRES MINIERS

1391950

Sea Green
Mitchell Lavery

Drilling, Assay and Related Consulting

Invoice 2012-001 Feb 1/12	
Claude Jacques	$1,337.83
Mitchell Lavery	$4,195.86
Lunik	$2,592.31
Invoice 2012-002 Feb 22/12	
G.E.E.S.T	$501.74
Invoice 2012-003 Apr 15/12	
9208-1934 Quebec Inc.	$91,981.29
Mitchell Lavery	$11,575.54
Invoice 2012-004 May 18/12	
9208-1934 Quebec Inc.	$11,590.05
Mitchell Lavery - project management	$1,757.54
Expenses	$2,141.80
Expenses	$23.52
AGAT Laboratories	$5,880.00
	$133,577.48



Cava Resources
Casse Berardi

		Geophysical, Airborne, Mapping and Related Consulting	Drilling, Assay and Related Consulting	Total
Casse Berardi				
Bruce Mackie Geological	Sep 2/11	$1,603.34	$0.00	$1,603.34
Bruce Mackie Geological	Nov11/11	$6,899.19		$6,899.19
Bruce Mackie Geological	Feb1/12	$1,100.00	$318.00	$1,418.00
Bruce Mackie Geological	Mar5/12	$2,420.00		$2,420.00
Bruce Mackie Geological	Mar5/12	$1,951.10		$1,951.10
Bruce Mackie Geological	Apr8/12	$0.00	$880.00	$880.00
Bruce Mackie Geological	Jun26/12	$4,764.12		$4,764.12
Colbert Drilling	Oct25/11	$0.00	$428.00	$428.00
Geotech	Oct31/11	$25,220.00	$0.00	$25,220.00
Geotech	Nov10/11	$25,592.18	$0.00	$25,592.18
Geotech	Nov24/11	$3,285.09		$3,285.09
Geotech	Feb2/12	$700.00		$700.00
Jeff Meek	Sep30/11	$450.00	$0.00	$450.00
Jeff Meek	Nov30/11	$75.00	$0.00	$75.00
Jeff Meek	Feb29/12	$150.00	$0.00	$150.00
Jeff Meek	Jan31/12	$75.00	$0.00	$75.00
Jeff Meek	Dec31/11	$112.50	$0.00	$112.50
Mitchell Lavery (Schedule)	Schedule	$0.00	$133,577.48	$133,577.48
Total Gross Expenses - Casse Berardi, Quebec		$74,397.52	$135,203.48	$209,601.00
Total Casse Berardi Reimbursements from Venture Partner		($25,962.31)	($32,961.64)	($58,923.95)
Venture Partner Charges for storage and other		$0.00	$6,447.00	$6,447.00
		($25,962.31)	($26,514.64)	($52,476.95)
Expenses eligible for Quebec Duty and Mining Tax Credits		$48,435.21	$108,688.84	$157,124.05

